


AMPED™

FP7634** 52" Ceiling Fan

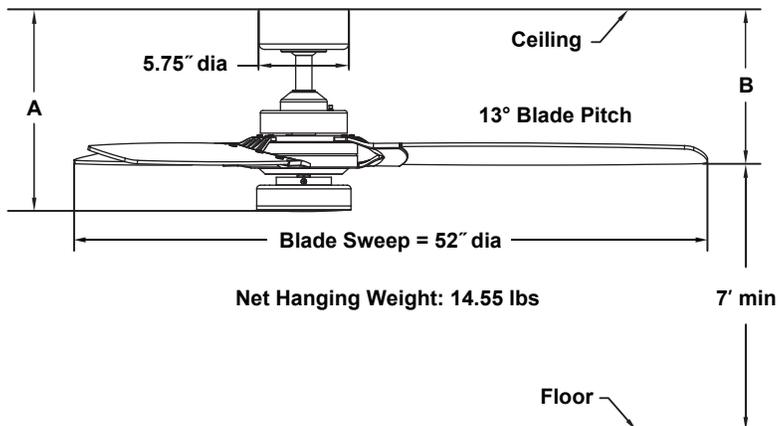

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 12.89" | 9.90" |
| Fan w/12" downrod | 20.39" | 17.40" |
| Fan w/18" downrod | 26.39" | 23.40" |
| Fan w/24" downrod | 32.39" | 29.40" |
| Fan w/36" downrod | 44.39" | 41.40" |
| Fan w/48" downrod | 56.39" | 53.40" |
| Fan w/60" downrod | 68.39" | 65.40" |
| Fan w/72" downrod | 80.39" | 77.40" |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 21" plywood blades is included.

LIGHTING OPTIONS:

One 18-watt LED included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH and CWRL4 wall controls, CRL4WH hand held remote control and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DR1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 400 sq ft.

Available Finishes

| | |
|------|--|
| BL | Black with Black Blades and Opal Frosted Shade |
| BLBS | Black and Brushed Satin Brass with Black Blades and Opal Frosted Shade |
| BN | Brushed Nickel with Brushed Nickel Blades and Opal Frosted Shade |
| MW | Matte White with Matte White Blades and Opal Frosted Shade |
| MWBS | Matte White and Brushed Satin Brass with Matte White Blades and Opal Frosted Shade |

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 193 | 5335 | 71 | 0.63 | 75 |
| Med | 118 | 3322 | 108 | 0.42 | 31 |
| Low | 64 | 1661 | 157 | 0.25 | 11 |

Energy Guide FTC

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 46 | 3612 | 13 | 79 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 18 | 1 | 1500 | 3000 | 90% |