# FIXED RECTANGLE STRAIGHT SHOWER ROD

**CLEAN MODERN LINES** 

sales@preferredbathinc.com www.preferredbathinc.com (336) 904-6248

PART NUMBERS

112-5<sub>BP-SR</sub>

112-5BN-SR

112-5MB-SR



FINISH

BRIGHT POLISHED

BRUSHED NICKEL

MATTE BLACK

## STAINLESS STEEL STRAIGHT SHOWER ROD

- STAINLESS STEEL RECTANGLE STRAIGHT SHOWER ROD 1
- STAINLESS STEEL MOUNTING SCREWS 4
- STAINLESS STEEL SET SCREWS 2
- PLATED ZINC DIE-CAST WALL BRACKET 2
- ZINC DIE-CAST WALL BRACKETS AND ROD RECEIVERS 2


## PATENTED T-PLUG DESIGN

- PATENTED DESIGN #USD752421s
- EASY ONE PERSON INSTALLATION

#### MAY BE CUT DOWN TO FIT ANY SIZE OPENING

• TOTAL INSTALLED LENGTH OF THE STRAIGHT SHOWER ROD IS 60 INCHES

To cut the shower rod down please follow these instructions: Measure the total opening of the shower/ tub enclosure and subtract that number from 60 inches, the remaining number is what will need to be cut from the shower rod. Example: 58 inch opening minus 60 inches leaves 2 inches to cut. It is best to cut equal amounts off both ends, this insures a proper fit.

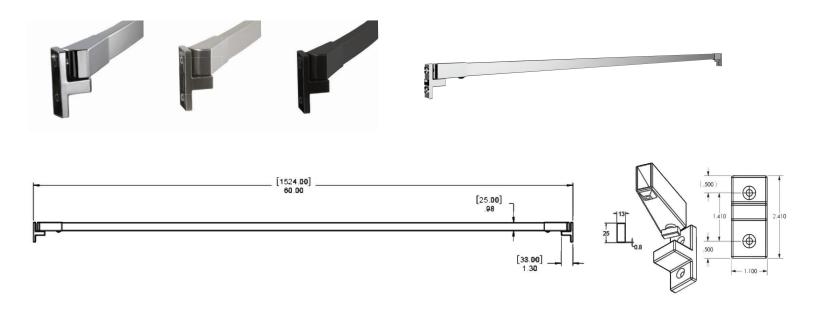

### **INSTALLATION:**

Screw the wall brackets onto the wall first. Be sure to measure and level each wall bracket. Once complete attach the bar receivers to the wall brackets via the patented T-Plug and insert the shower rod approximately 2 inches into one of the mounted bar receivers. Slide the shower rod towards the second empty bar receiver mounted on the adjacent wall and insert approximately 1 inch. Use the provided set screws to lock everything in place.

#### WOOD BLOCKING IS THE PREFERRED METHOD OF INSTALLATION

Limited Warranty