

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 4733

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.2)


1. Attach the end pipe nipple (I) into bottom coupling of the column(F) and turn it until tight. Attach the pipe nipple onto the top coupling of the lamp body(K) and turn it until tight. Place the socket sleeve(J) onto the lamp holder.
2. Install the light bulbs in accordance with the fixture specifications  
**NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
3. Attach the arm (G) to the column (F) and glass frame (L) aligning their positioning holes, then lock their securely with the ball screw (E) and (H).

## HANGING THE FIXTURE (Fig.1)


1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old single bar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Thread the two mounting screws about 1/4" into the pre-drilled holes in the single bar spaced the same distance apart as the holes in the fixture canopy (A).
4. Install the single bar to the Junction Box with the two Junction Box Screws as shown. The side of the single bar marked "GND" must face out.
5. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as Shown in Fig.3, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
6. Then cover the junction box with canopy (A), aligning the Screw of mounting plate with the hole of canopy and lock it with brass ball nut(B).
7. Open one the end link of the chain provided and connect to the fixture loop (D). Close the link.
8. Lace the fixture wires through the chain.
9. Open the other end link of the chain and hang the fixture on the loop at the ceiling. Close the link.
10. Lace the fixture wires, ground wires through the loop and canopy (A) and pull until taut.

**Your installation is now complete Return power to the junction box and test the fixture.**


**Fig.1**

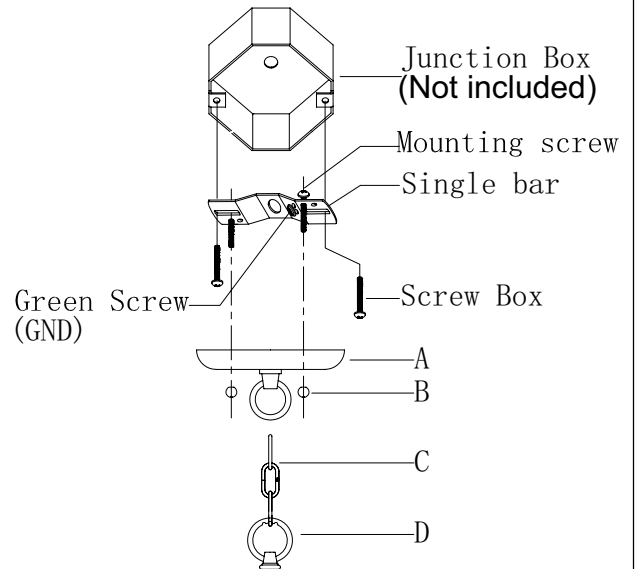

**Fig.2**

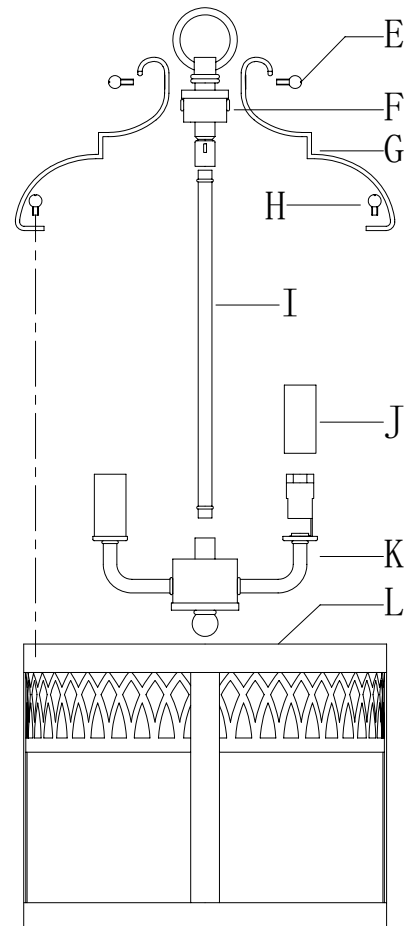

**Fig.3**

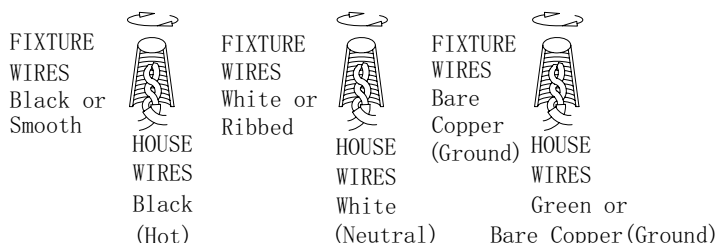

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 4733

## Ceiling Mount Fixtures


**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two mounting screws about 1/4" into the pre-drilled holes in the single bar spaced the same distance apart as the holes in the fixture canopy (A).
4. Install the single bar to the Junction Box with the two Junction Box Screws as shown. The side of the single bar marked "GND" must face out.
5. While holding the column assembly towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
6. Attach the canopy (A) and the washer (D) to the center of the column (F), then lock the canopy (A) with the hex nut (C).
7. Attach the end pipe nipple (I) into bottom coupling of the column (F) and turn it until tight. Attach the pipe nipple onto the top coupling of the lamp body (K) and turn it until tight. Place the socket sleeve (J) onto the lamp holder.
8. Install the light bulbs in accordance with the fixture specifications **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
9. Attach the arm (G) to the column (F) and glass frame (L) aligning their positioning holes, then lock it securely with the ball screw (E) and (H).
10. Put the canopy (A) to the Junction box, aligning screws on single bar with mounting holes in canopy and lock it securely with ball nut (B).

**Your installation is now complete Return power to the junction box and test the fixture.**

**Fig.1**

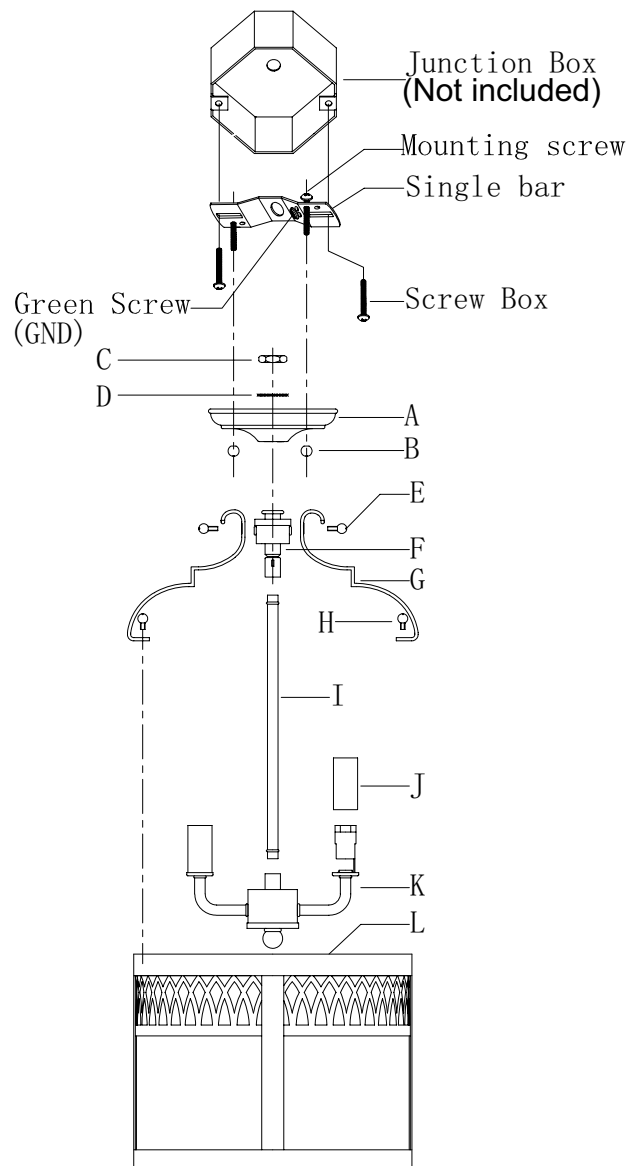

**Fig.2**

