

# Loure® Rite-Temp® Shower Valve Trim K-TLS14670-4

### **Features**

- Includes face plate with handle, shower arm with flange.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- For use with any KOHLER showerhead (not supplied).
- Complements the Loure faucet and accessory collections.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

Trim set requires valve to complete installation.

### **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

# **Optional Products/Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies





# Codes/Standards

ASME A112.18.1/CSA B125.1

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | SN   | Vibrant® Polished Nickel |
|       | BN   | Vibrant® Brushed Nickel  |






# Loure® Rite-Temp® Shower Valve Trim K-TLS14670-4

# For slip-fit shower arm,

pipe must extend 2" (51 mm) to 4" (102 mm) beyond the finished wall.

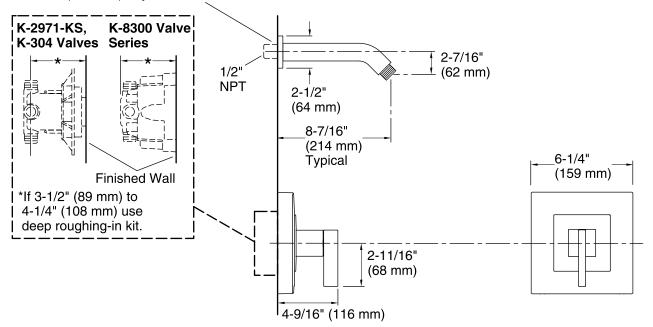

### **Technical Information**

All product dimensions are nominal.

### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

