

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8688-64

For Flush Mount Ceiling Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.

MOUNTING THE FIXTURE

1. Shut off the power at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Mounting Screws (A) about 1/4" into the pre-drilled holes in the Crossbar (B) spaced about the same distance apart as the holes in the fixture body (D). Allow Screws (A) to protrude slightly beyond the ceiling surface.
4. Attach the crossbar (B) to the outlet Box using the two screws (C) from the outlet Box. The side of the crossbar marked "GND" must face out.
5. Hold the fixture body (D) towards the crossbar and connect the electrical wires as follows (See Fig.2). Connect the black wire from the fixture to the black house (hot) wire; connect the white wire from the fixture to the white house (neutral) wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connects fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the crossbar. Tuck the wire connections neatly into the ceiling junction box as you are holding the fixture assembly toward the ceiling.
6. Place the glass plate (F) into the iron frame (H) and press firmly to seat the glass.
7. Attach the iron frame (E) to the top of the iron frame (H) using the lock screws (G).
8. Attach the assembly of iron frame (H) into center coupling of fixture body (D) and tighten it with the pipe (I).
9. Finish mounting the fixture body (D) by placing it over both Mounting screws (A) so that the screws protrude from the keyholes in the bottom of the fixture body (D). Rotate the fixture body (D) until the screws are seated in the slots of the keyholes and tighten it with a screwdriver.
10. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
11. Raise the glass plate (J) to the bottom center pipe (I), aligning the hole, then lock with ring (K).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


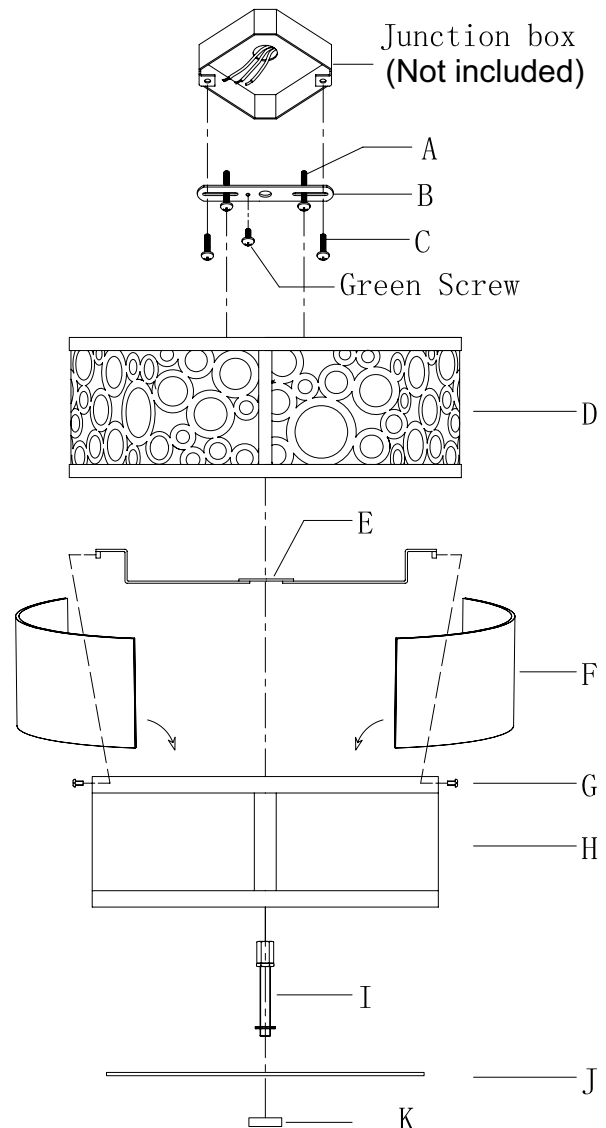


Fig.2

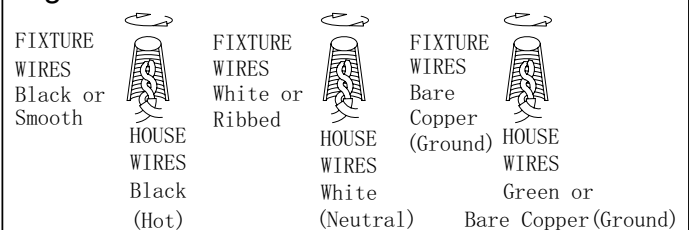

MIN 90°C SUPPLY CONDUCTORS