



Location:

SYMMONS® Origins®


the smart choice™

9601-P-TRM, 9601PTRMTC
Shower Trim
Specification Submittal



Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> Origins Shower Trim Requires Temptrol® Pressure Balancing Shower Valve Tri-star handle 1 mode showerhead with easy to clean nozzles 2.5 gpm (9.5 L/min) flow restrictor Tub spout not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9601PTRMTC) 	<ul style="list-style-type: none"> <input type="checkbox"/> -1.5 <i>1.5 gpm (5.7 L/min) flow restrictor</i> <input type="checkbox"/> -2.0 <i>2.0 gpm (7.6 L/min) flow restrictor</i> <input type="checkbox"/> -143 <i>3 mode showerhead</i> <input type="checkbox"/> -145 <i>5 mode showerhead</i> <input type="checkbox"/> -151 <i>1 mode showerhead</i> <input type="checkbox"/> -231 <i>Super showerhead</i> <input type="checkbox"/> -295 <i>Institutional showerhead</i> <input type="checkbox"/> -B <i>Brass escutcheon (chrome only)</i> <input type="checkbox"/> -D <i>Brass dome cover (chrome only)</i> <input type="checkbox"/> -L1 <i>Less showerhead</i> <input type="checkbox"/> -LAM <i>Metal finish insert handle</i> <input type="checkbox"/> -LP <i>Loop handle</i> <input type="checkbox"/> -REB <i>Rebuild trim kit, includes TA-10 and TA-4</i> <input type="checkbox"/> -VP <i>Vandal resistant escutcheon screws in place of standard screws</i>
<h3>Model Numbers</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 9601-P-TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately <input type="checkbox"/> 9601PTRMTC Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	
<h3>Compliance</h3> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 <div style="text-align: right; margin-top: 10px;">  </div>	
<h3>Warranty</h3> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.</p>	<p>Note: Append appropriate -suffix to model number.</p>

Dimensions

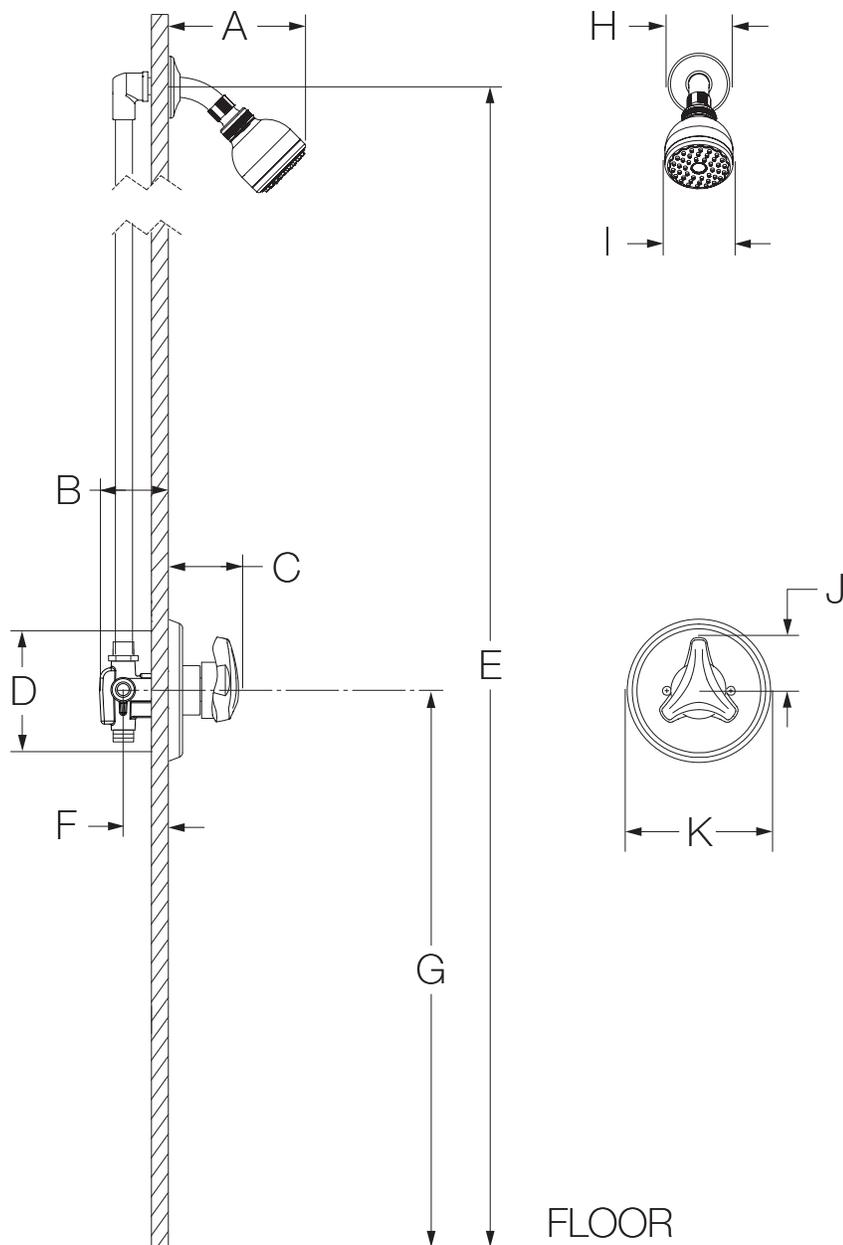

Measurements	
A	6-3/8", 162 mm
B	3-1/2", 89 mm
C	2-7/8", 73 mm
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	Ref. 77", 1956 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 42", 1067 mm
H	Ø 2-1/2", 64 mm
I	Ø 2-3/4", 70 mm
J	2-1/8", 54 mm
K	Ø 5-3/4", 146 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.