









Assembly Instruction---Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	BACK LEGS		2
P3	Chair		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*2-3/8"		8
H2	Lock Washers φ5/16"		8
H3	Flat Washers φ5/16"		8
H4	Allen Wrench φ5/16"		1

1. Turn the chair over and take out the legs from the bottom.

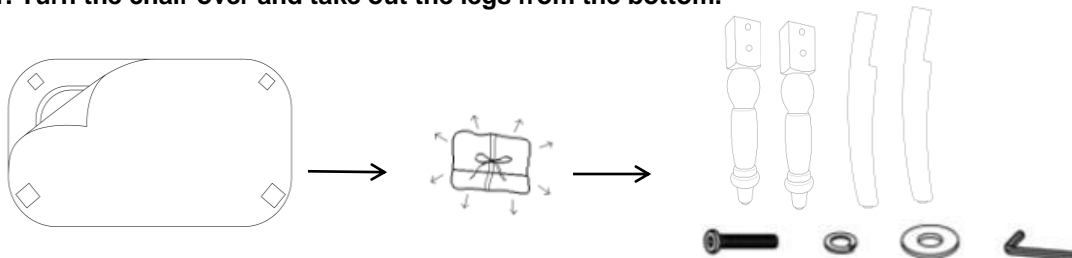

2. Attached the Legs to the seat frame by using Flat Washers (H3), Lock Washers(H2) and Bolts (H1). Securely tighten all bolts with Allen Wrench (H4).

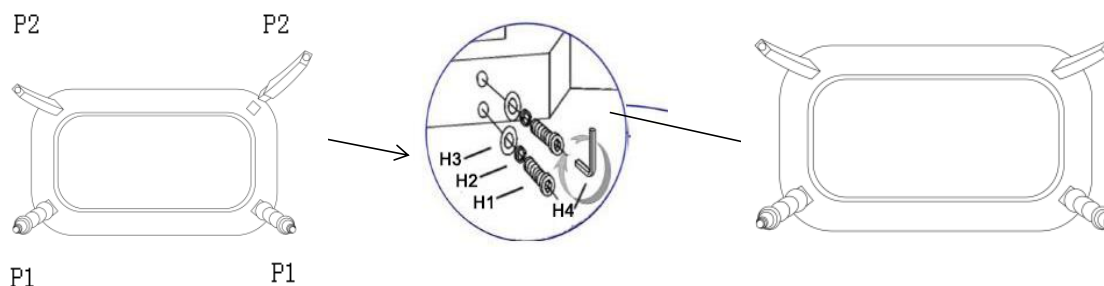

3. Level the chair and place the chair upright on a level surface.

