

ASSEMBLY INSTRUCTIONS

Description: Ryan Accent chair






Important safety instructions:



- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:





- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

Parts List

Item	Description		QTY
P1		right armrest	1PC
P2		left armrest	1PC
P3		backrest rail	1PC
P4		backrest cushion	1PC
P5		seat cushion	1PC

Item	Description		QTY
P6		sling fabric on left armrest	1PC
P7		sling fabric on right armrest	1PC

Hardware List

Item	Description		QTY
H1		M6*10MM	2PC
H2		M6*25MM	4PC
H3		M6*45MM	8PC
H4		M6	1PC




DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.


Assembly Procedures:

Step 1. Assemble the chair on soft, scratch-free surface such as a carpet or cloth prevent scratching.


- (1).Loosely attach backrest rail (P3) to right armrest (P1) by using bolts (H1) and allen wrench (H4).
- (2).Loosely attach left armrest (P2) to the other end of backrest rail (P3) by using bolts (H1) and allen wrench (H4).
- (3).Put the metal frame on a level surface and security tighten all bolts.

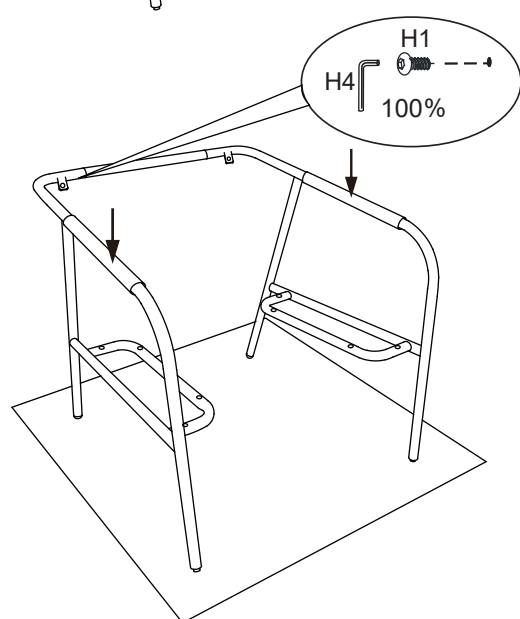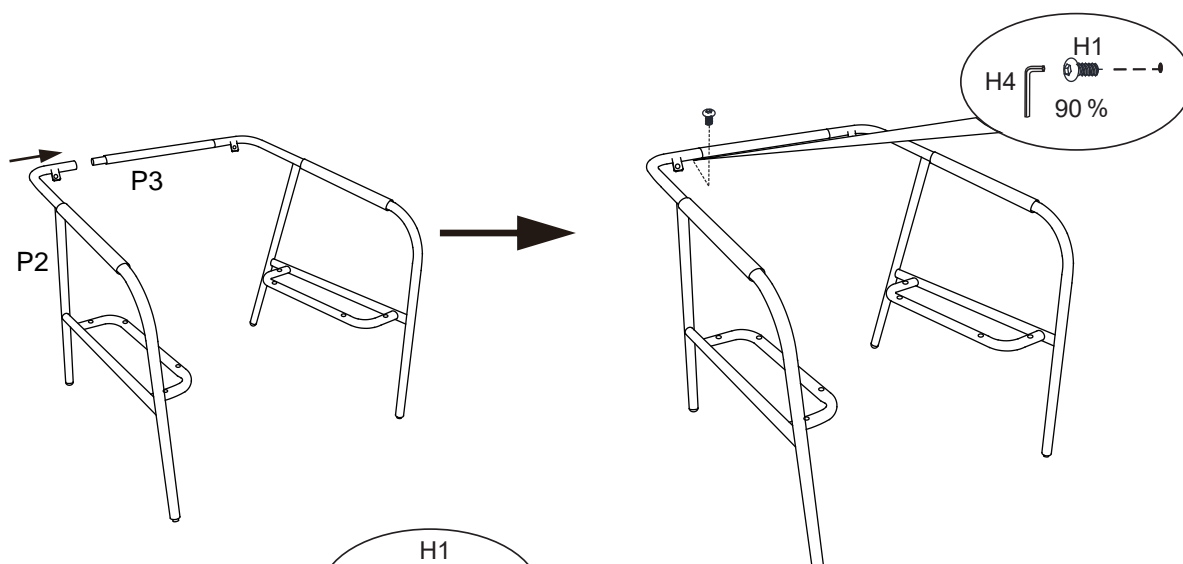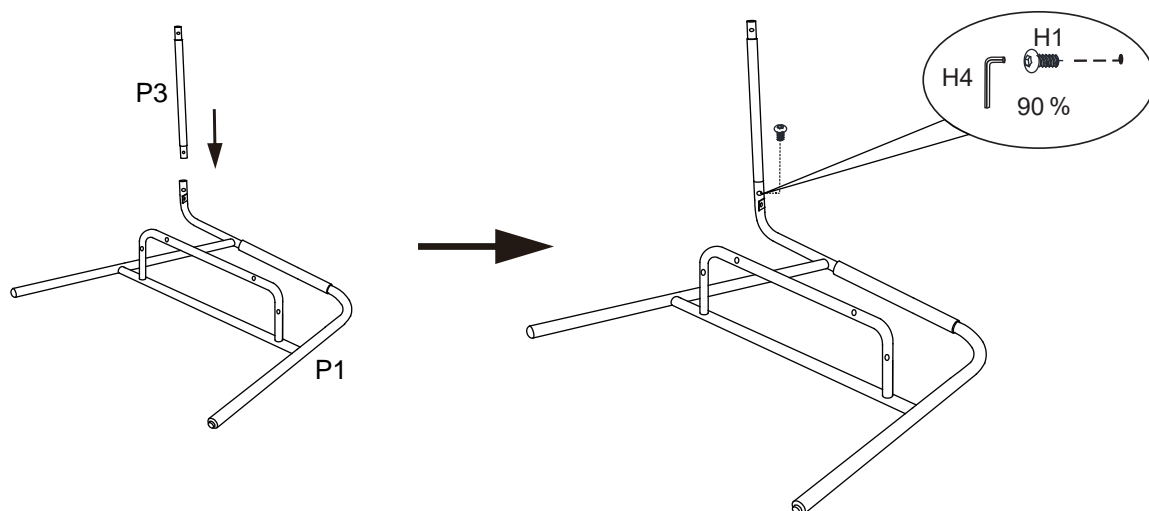


- Step 2. (1). Fix sling fabrics (P6,P7) to armrests by using velcro on the fabric.
(2). Connect seat cushion (P5) and back cushion (P4) with bolts (H2), tighten bolts by allen wrench (H4). put assembled cushions on the chair frame.
Loosely fix backrest rail (P3) and back of backrest by using bolts (H2) and allen wrench (H4).

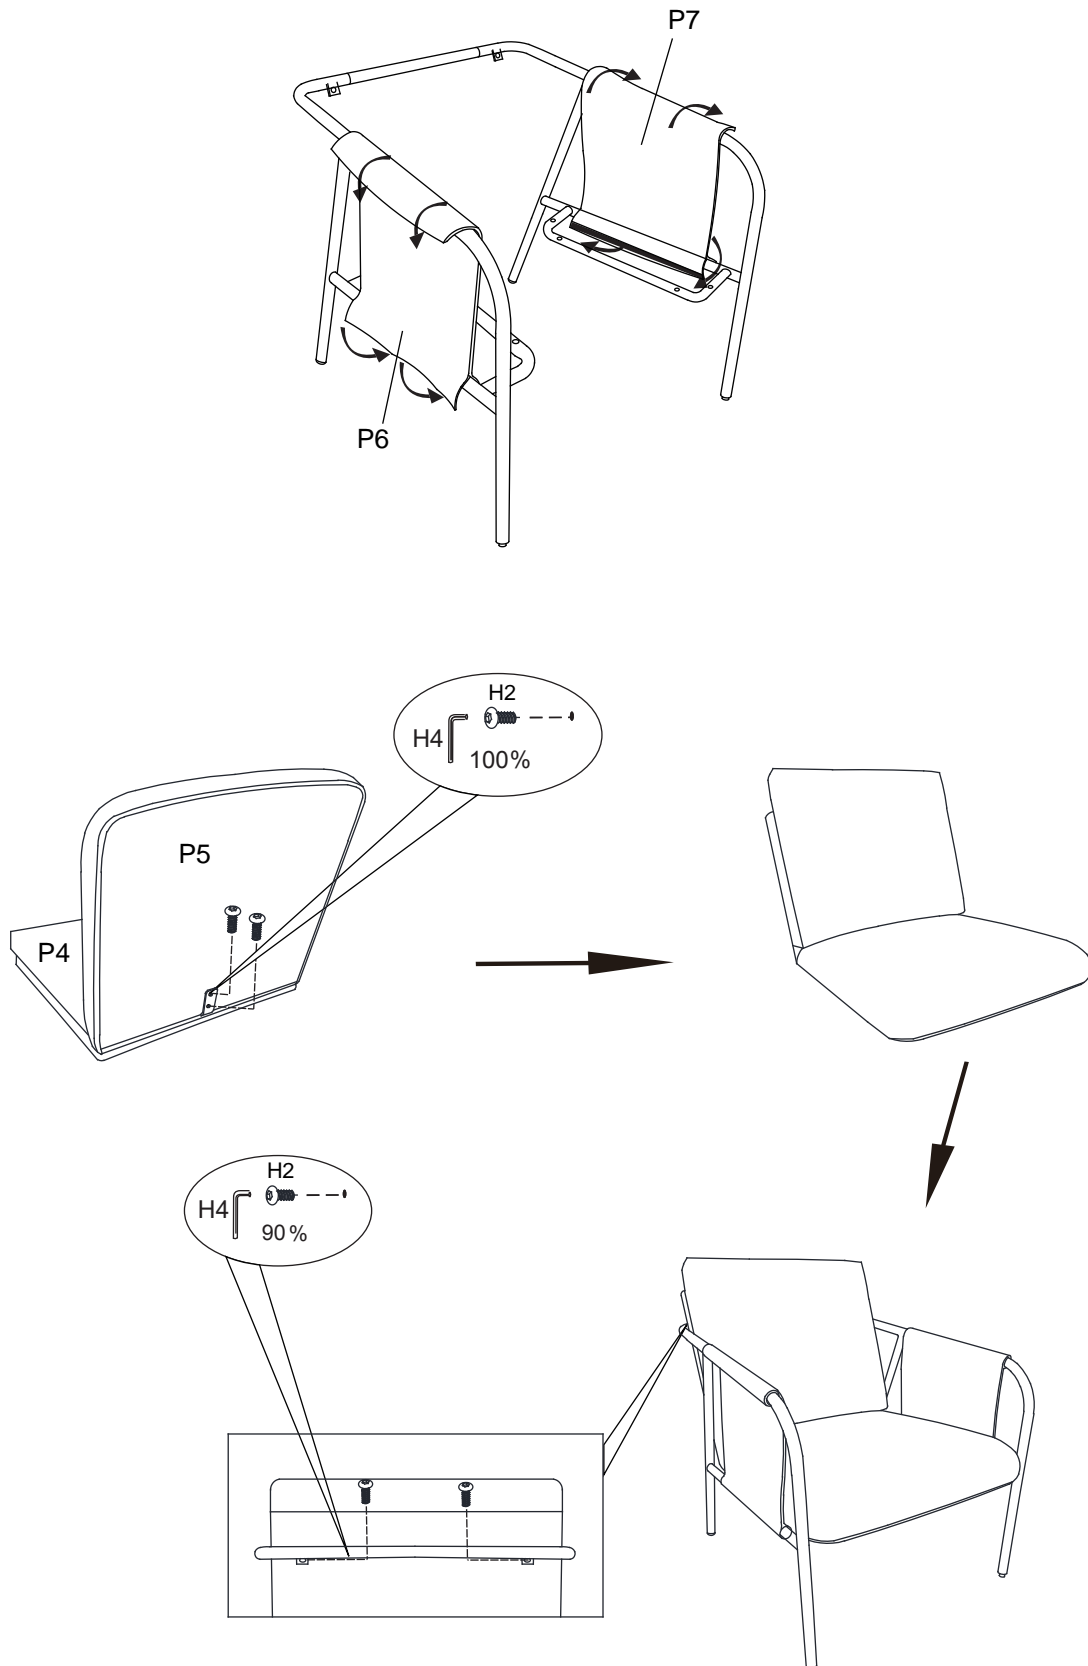

Step 3. Fix bottom of seat cushion to metal frame by using bolts (H3) and allen wrench (H4).Security tighten all bolts in step 2,3.

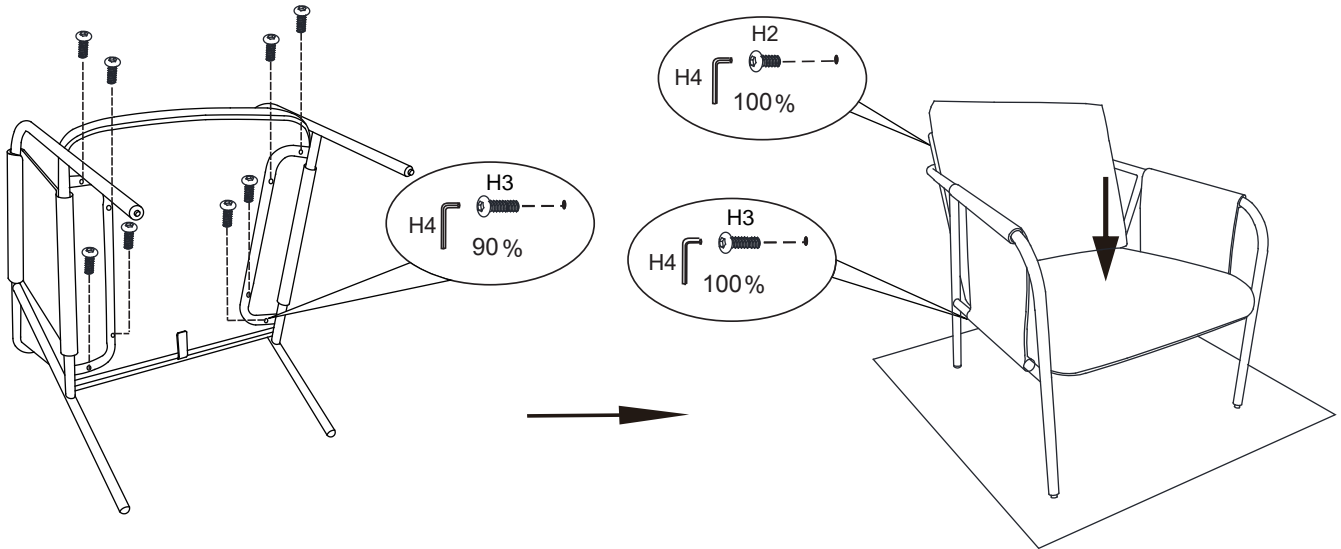

Step 4. Place the chair upright on a flat surface, adjust the levelers if chair is uneven.

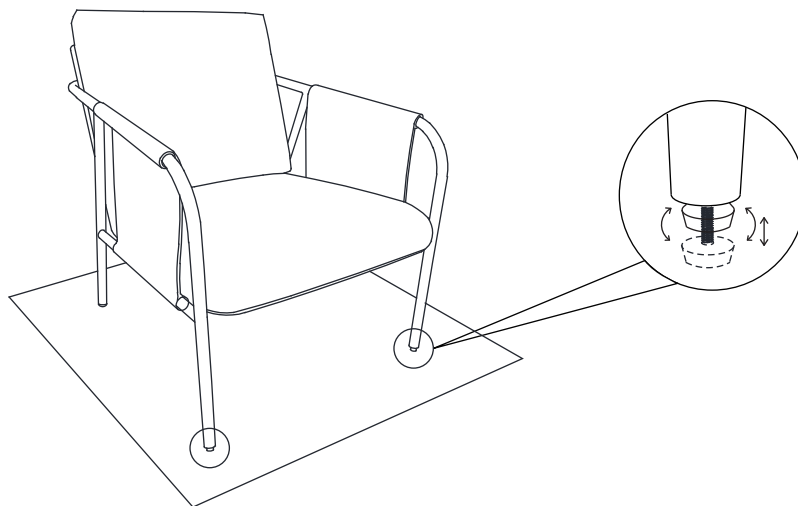

ADDITIONAL NOTE ABOUT SAFETY:
BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.
THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY,
AND ENSURE STABILITY.
Thank you for your purchase