

**Step 3** - Put 1 Lock Washer and 1 Washer on each bolt. Attach the Swivel to the seat bottom through the access hole in the Bottom of the Base Unit with all four (4) bolts.



**Fig. 4**

Screw all 4 screws in part way before tightening with Allen Wrench pro-vided, Turning base unit as needed to access the nuts that are inserted on the bottom of the barstool seat. Tighten. See (Fig. 4)

[www.SunsetTrading.com](http://www.SunsetTrading.com) [info@sunsettrading.com](mailto:info@sunsettrading.com)

P4




# Barstool Instructions

Models: B24; B30, B124-24; B124-30



P1



**Fig. 1**



## Parts/Units, (Fig. 1)


- 1 Bottom Base Unit  
(Pre-Assembled)
- 1 Top Seat Unit (Pre-Assembled)
- 1 Swivel
- 4 Seat Machine Bolts
- 4 Lock Washers
- 8 Washers
- 4 #10 Philips Screws
- 1 4mm Allen Wrench
- 1 Instruction Sheet

**Step 1** Place Swivel on top of Base with top front markings on Swivel facing up. Attach Swivel to the Base Bottom using 4 #10 Philips Screws and 4 Washers Tighten with a phillips screwdriver not provided. See (Fig. 2)



**Fig. 2**

**Step 2** - Place Seat Top upside down on table or bench (lay a towel down to protect from scratches). Make note of the marking on the top of the Swivel that says *FRONT*. This side of the Swivel must be mounted toward the front of the Barstool seat in order to provide proper angle for sitting. Flip Base, with Swivel mounted and turned as shown in Fig.2, upside down on top of the seat bottom. Line up the four (4) slots in the Swivel top with the four (4) nut inserts that are mounted in the seat. See (Fig. 3)

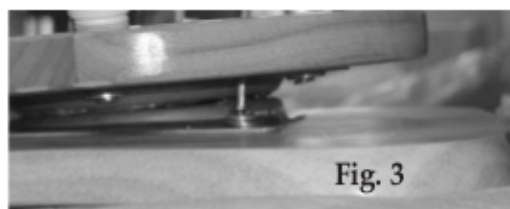

**Fig. 3**

P2

P3