


OXFORD CHAISE LOUNGE

ASSEMBLY
INSTRUCTIONS

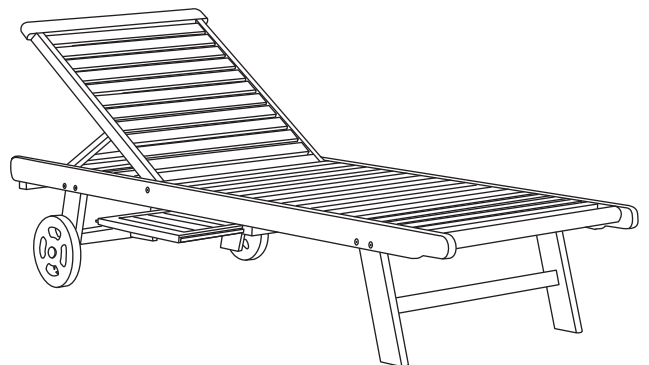


COMPONENTS


① Leg Assembly (Head)
Quantity: 1



② Chaise Lounge Frame
Quantity: 1

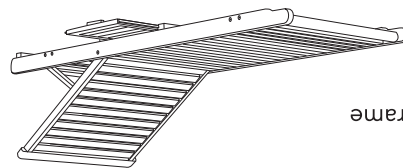

③ Leg Assembly (Foot)
Quantity: 1




④ Wheels
Quantity: 1



HARDWARE

Ⓐ Bolts
Quantity: 8



Ⓒ Axle Bolts
Quantity: 2



Ⓔ Small Washers
Quantity: 2



Ⓕ Hex Nuts
Quantity: 2



Ⓓ Large Washers
Quantity: 2




Ⓑ Cap Nuts
Quantity: 8




FINISHING ITEMS

NOTE: A hammer and a Phillips head screwdriver (not provided) will be needed for the assembly of this bench.

Ⓖ Allen Wrench
Quantity: 2



Ⓗ Hex Head Wrench
Quantity: 2




Medium Grit Sandpaper

NOTE: If the furniture is going to be placed on a concrete or tile patio, it should first be rinsed well to remove the sawdust that may cause some staining.

INSTRUCTIONS

STEP 1


On a clean flat surface, lay seat assembly ④ flat on the ground. Using 4 bolts, A attach the back assembly ③ to the seat.

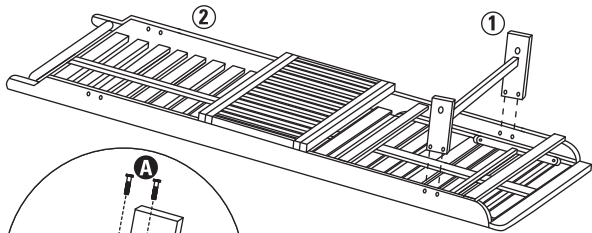

NOTE: The bolts are inserted from the inside of side rail, and the nuts are inserted on the outside of side rail.


STEP 3

Using two bolts, attach one arm ② to the leg and to the brace on the back assembly. (Arched cutout of the arms face inward.)

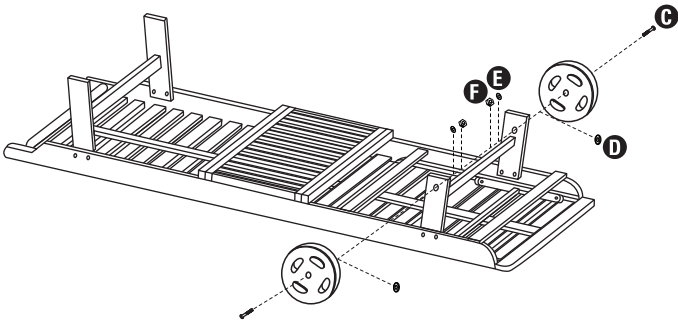


STEP 4

Turn chaise to its upright position.

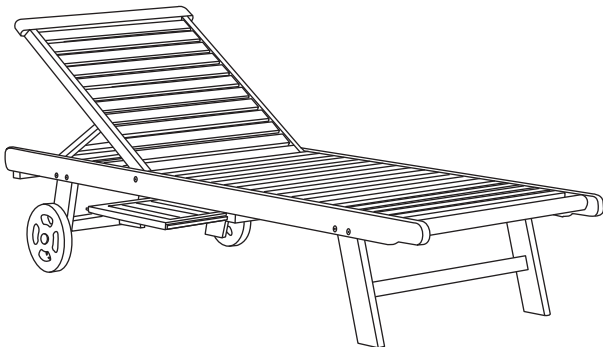

STEP 2

Carefully lay the chair on its side. Using three bolts, attach one leg ⑥ to the seat assembly. (Leg will be positioned with the arm brace facing upward and to the front of the seat assembly.) NOTE: Leave bolts slightly loose to help with alignment of the sofa seat assembly.

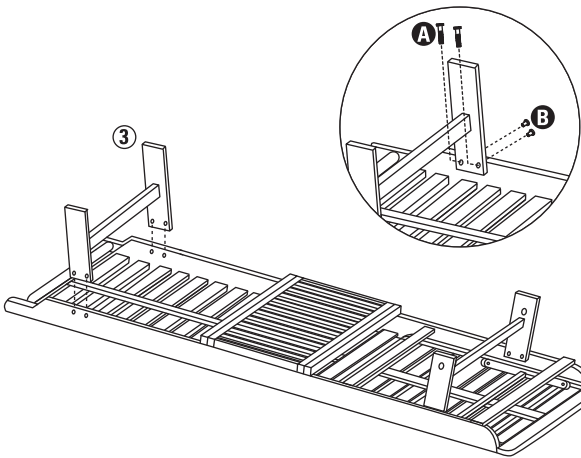

STEP 3 (detail)

