WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN. WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item

* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


*The external flexible cable or cord of this luminaire cannot be replaced If the cord is damaged, the luminaire shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Lamp Body	1	1X	D	Canopy Screw	@	3X
B-1	Mounting Plate		1X	E	Bulb		1X
B-2	Mounting Plate	÷	1X	F	Wall Screw 2	annannen []}	2X
с	Wall Screw 1		2X	G	Anchor		2X



Model#: JYL9067 A/B Product Dimensions: 8.5"L X 35"W X 17"H

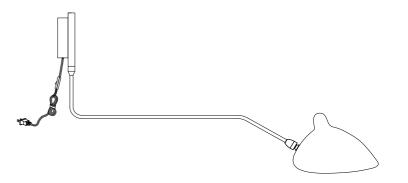

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 20 minutes.

Installation to outlet box with Mounting Plate (B-1)


1.Separate the Mounting Plate(B-1) from the Lamp Body(A) by removing the Canopy Screw (D) anti-clockwise.

2.Fix the Mounting Plate(B-1) to the outlet box with Wall Screw 1 (C).

3.Attach the Canopy of the Lamp Body(A) to the Mounting Plate (B-1) and fix it by turning the Canopy Screw (D) clockwise.

4. Insert the Bulb (E) into the Socket. Be sure to use light bulb(E) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

PLEASUE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE IS 1 X 4W LED BULB IN THE BOX.

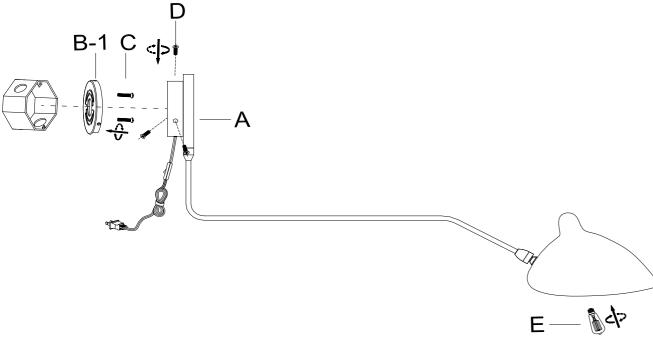

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 20 minutes.

Installation to wooden wall with Mounting Plate (B-1)


1.Separate the Mounting Plate(B-1) from the Lamp Body(A) by removing the Canopy Screw (D) anti-clockwise.

2.Fix the Mounting Plate(B-1) to the wooden wall with Wall Screw 2 (F).

3.Attach the Canopy of the Lamp Body(A) to the Mounting Plate (B-1) and fix it by turning the Canopy Screw (D) clockwise.

4. Insert the Bulb (E) into the Socket. Be sure to use light bulb(E) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

PLEASUE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE IS 1 X 4W LED BULB IN THE BOX.

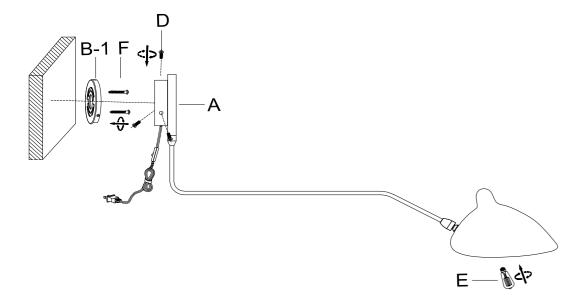

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 20 minutes.

Installation to drywall with Mounting Plate (B-1)


- 1.Separate the Mounting Plate(B-1) from the Lamp Body(A) by removing the Canopy Screw (D) anti-clockwise.
- 2.Determine the location for the Lamp Body(A). Using the Mounting Plate (B-1) as a template, mark the location of the holes for the wall anchors (G).

3.Remove the Mounting Plate(B-1),drill 2 holes,thread the Anchor(G) into the holes,then attach the Mounting Plate(B-1) to the drywall, secure the Wall Screws 2 (F) through the set holes into the Anchor(G).

4. Attach the Canopy of the Lamp Body(A) to the Mounting Plate (B-1) and fix it by turning the Canopy Screw (D) clockwise.

5. Insert the Bulb (E) into the Socket. Be sure to use light bulb(E) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

PLEASUE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE IS 1 X 4W LED BULB IN THE BOX.

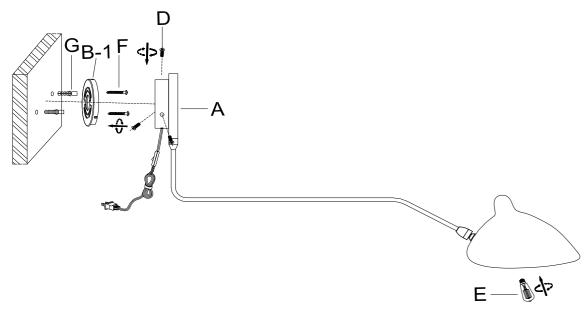

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 20 minutes.

Installation to wall with Mounting Plate (B-2)

1.Determine the location for the Lamp Body(A). Using the Mounting Plate (B-2) as a template, mark the location of the holes for the wall anchors (G).

2.Remove the Mounting Plate(B-2), drill 2 holes, thread the Anchor(G) into the holes, then attach the Mounting Plate(B-2) to the wall, secure the Wall Screws 2 (F) through the set holes into the Anchor(G).

3.Attach the Canopy of the Lamp Body(A) to the Mounting Plate (B-2) and fix it by turning the Canopy Screw (D) clockwise.

4. Insert the Bulb (E) into the Socket. Be sure to use light bulb(E) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

PLEASUE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE IS 1 X 4W LED BULB IN THE BOX.

