

Levity® Frameless Sliding Shower Door K-706015-D3

Features

• Cushioned center guide provides smooth, quiet sliding action.

Technology

- Frameless, 1/4-inch-thick Frosted tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Gently curved towel bars, inside and outside, provide integrated storage on the door.
- CleanCoat[®] nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

Installation

- Sliding shower door.
- Not for use in hospitality.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components: Hardware kit



Codes/Standards

CPSC 16CFR 1201 ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

11	SH	Bright Silver
11	MX	Matte Nickel
11	ABV	Anodized Brushed Bronze
	ABZ	Anodized Dark Bronze

Available Glass Options

Code Description


D3 Frosted



Levity®



Frameless Sliding Shower Door K-706015-D3

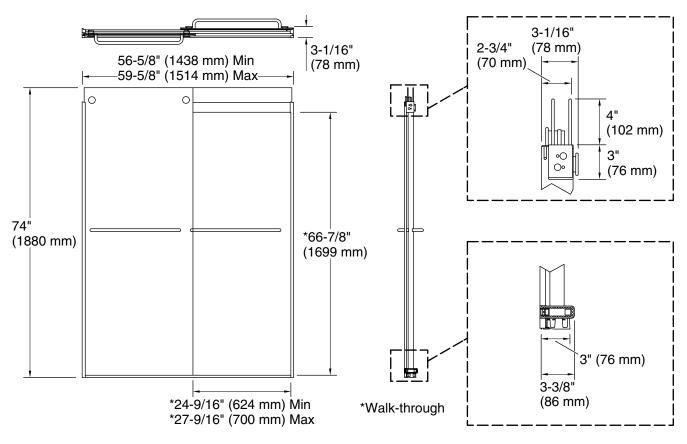

Technical Information

All	prod	luct	dimensio	onsa	are	nomii	nal.

Installation type:	For shower base installation			
Opening style:	Sliding/Bypass			
Opening Width - Min:	56-5/8" (1438 mm)			
Opening Width - Max:	59-5/8" (1514 mm)			
Walk-through - Min:	24-9/16" (624 mm)			
Walk-through - Max:	27-9/16" (700 mm)			
Base-To-Wall Radius	1/2" (13 mm)			
– Max:				
Glass thickness:	1/4" (6 mm)			
Glass coating:	CleanCoat®			

Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

