


NODE SERIES

VMCL004601B012AB



PROJECT:	TYPE:	CATALOG #:	DATE:
----------	-------	------------	-------

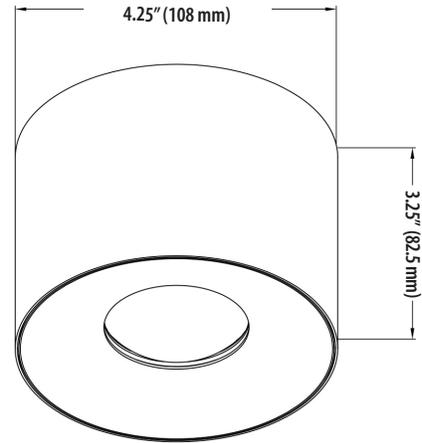

NOMINAL STANDARD SPECIFICATIONS

SKU:	VMCL004601B012AB
FINISH:	ANTIQUE BRASS
LUMEN OUTPUT:	538.13
INPUT VOLTAGE:	120 V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	ELV
POSITIONING:	FIXED
BEAM ANGLE:	85°
WATTAGE:	12 W
CUT OUT:	1.5" Dia
ENVIRONMENT:	DAMP / IP44
MOUNTING:	SURFACE

FEATURES

- 4.25" LED Surface Mounted Downlight, NODE Series
 - Aluminum body structure available in 3 finishes Chrome, White and Antique Brass
 - Integrated AC LED fixture, surface mounted
 - IC Rated
 - DIMENSIONS: 4.25" Diameter x 3.25"H
 - HOLE SIZE: 1.5" Diameter
 - BRIGHTNESS: 538.13 Lumens
 - ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
 - 3 Year Limited Warranty
- ***THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"***

SAMPLE ORDERING SKU

1	2	3	4	5	6
VMCL004601B	012	AB	30K	B85	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMCL004601B	012 - 12 W	AB - Antique Brass	27K - 2700*	B85 - 85°	EMD - EMERGENCY DRIVER
		CH - Chrome*	30K - 3000		EMC - EMERGENCY CIRCUIT
		WH - White*	35K - 3500*		
			40K - 4000*		

NOTES

RELATED PRODUCTS AVAILABLE:

- VMCL004601B012CH
- VMCL004601B012WH
- VMCL004601A008AB
- VMCL004601A008WH



NODE SERIES


VMCL004601B012AB



PROJECT: _____ TYPE: _____ CATALOG #: _____ DATE: _____


PHOTOMETRICS

30K - 3000 - STANDARD

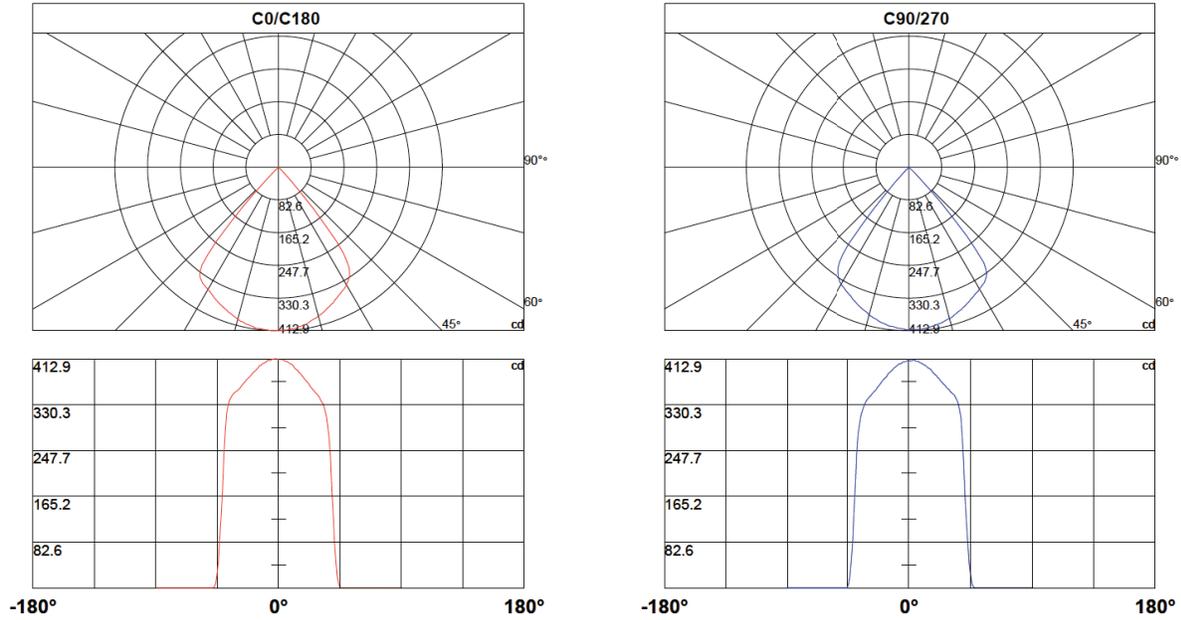

BEAM ANGLE

30K - 3000 - STANDARD

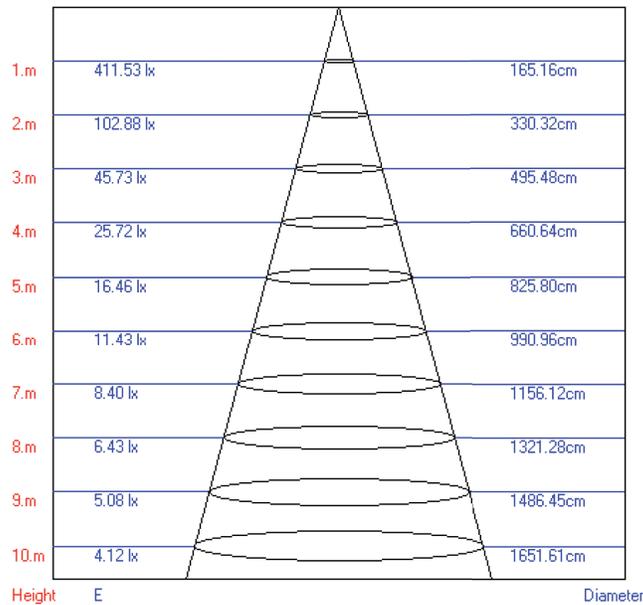

Beam Angle: 79.10°

