
















ASSEMBLY INSTRUCTION

METAL ARCH DESIGN TWIN PLATFORM BED



A Headboard Leg 2PCS 	B Headboard 1PC 	C Footboard 1PC 	D Front Rail Section 2PCS 
E Rear Rail Section 2PCS 	F Support Leg 2PCS 	G Center Support Bar 1PC 	H Slat 16PCS 
I Slat Connector 32PCS 	J Bolt 1/4"*16mm 20PCS 	K Bolt 1/4"*46mm 4PCS 	L Nut 1/4" 4PCS 
M Ratchet Tool 4mm 1PC 	N Wrench 5/16"-1/4" 1PC 		

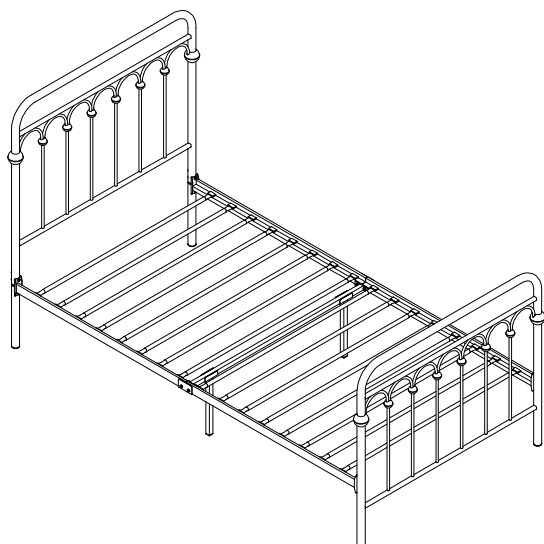

This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


How to Use the Ratchet Tool (M)

1. Before assembling the furniture, please adjust the lock as needed.

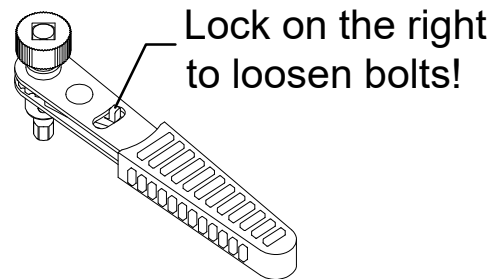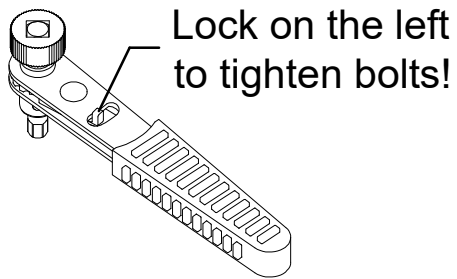


2. Tighten or loosen bolts.

- **Tighten bolts:** Locate the turncap and rotate it clockwise to screw the bolt quickly until it cannot be rotated any more. Then start rotating the handle clockwise to finalize tightening the bolt.

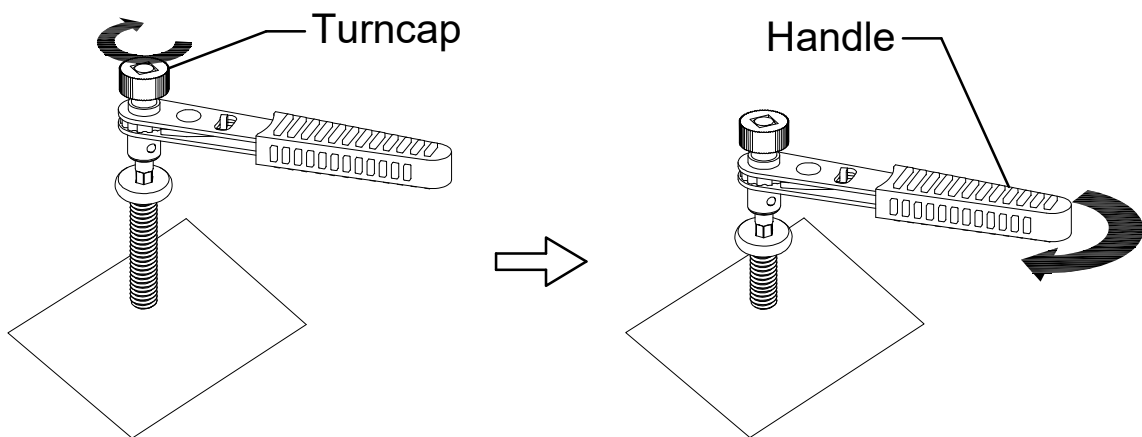


- **Loosen bolts:** Rotate the handle counterclockwise to loosen the bolt. Then continue rotating the turncap in the same direction to remove the bolt completely.

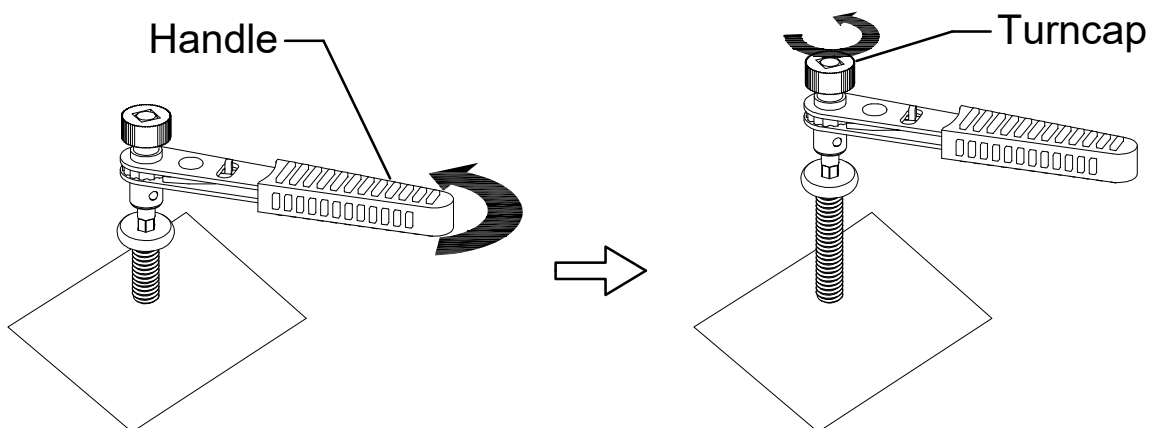


1


Attach the Headboard Leg (A) to the Headboard (B), insert the Bolt (J), turn the Ratchet Tool (M) to tighten them.

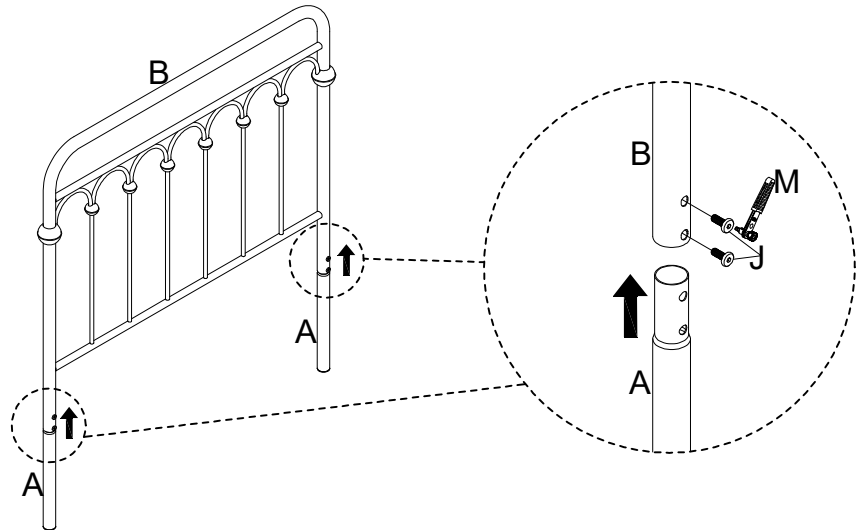**2**

Attach the Front Rail Section (D), Rear Rail Section (E) and Center Support Bar (G), insert the Bolt (J), Bolt (K) and Nut (L), turn the Ratchet Tool (M) and Wrench (N) to tighten them.

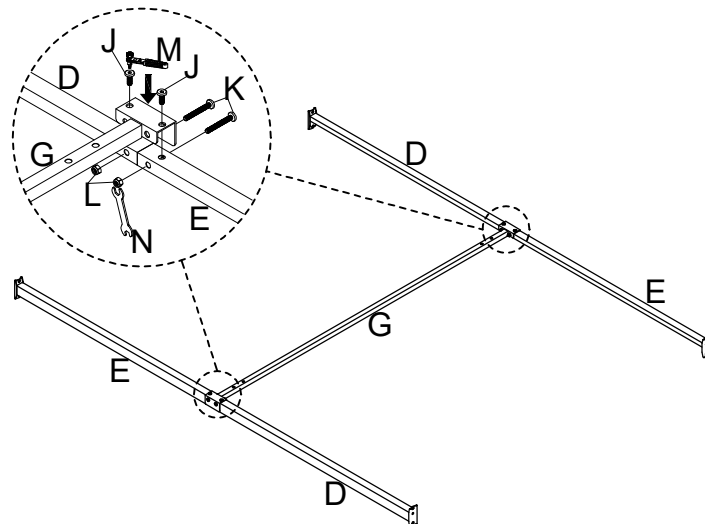
**3**

Attach the Support Leg (F) to Center Support Bar (G), and then insert the Bolt (J), turn the Ratchet Tool (M) to tighten them. After the assembly, flip them over.

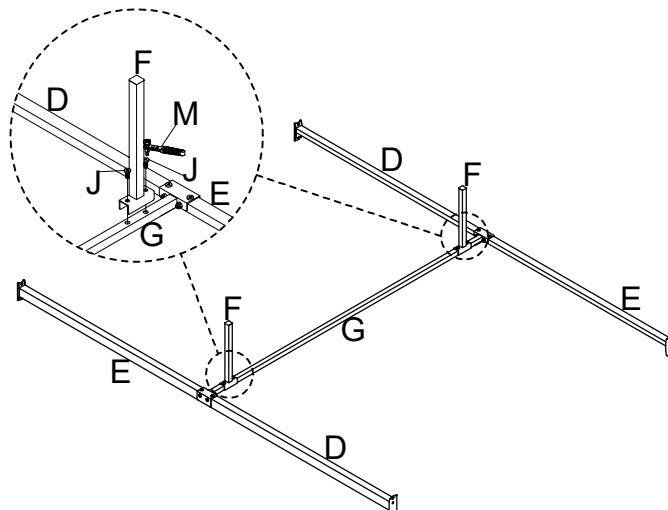


4

Attach the assembled metal frame to the Headboard Leg (A), Headboard (B) and Footboard (C), insert the Bolt (J), turn the Ratchet Tool (M) to tighten them.

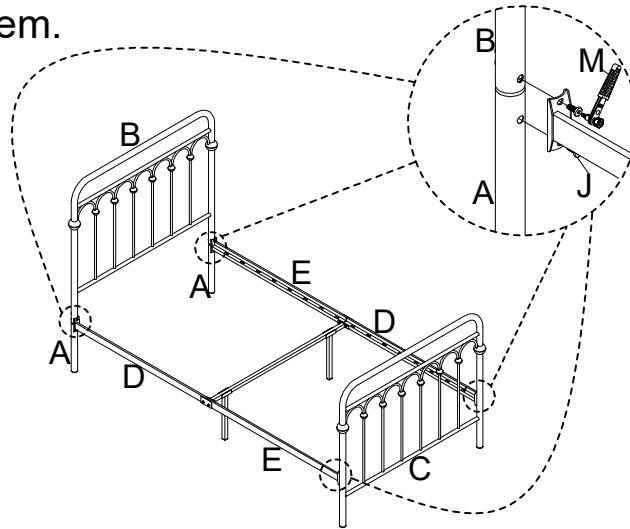


5

Insert the Slat Connector (I) to the both sides of Slat (H), press the Slat (H) into the correct place.

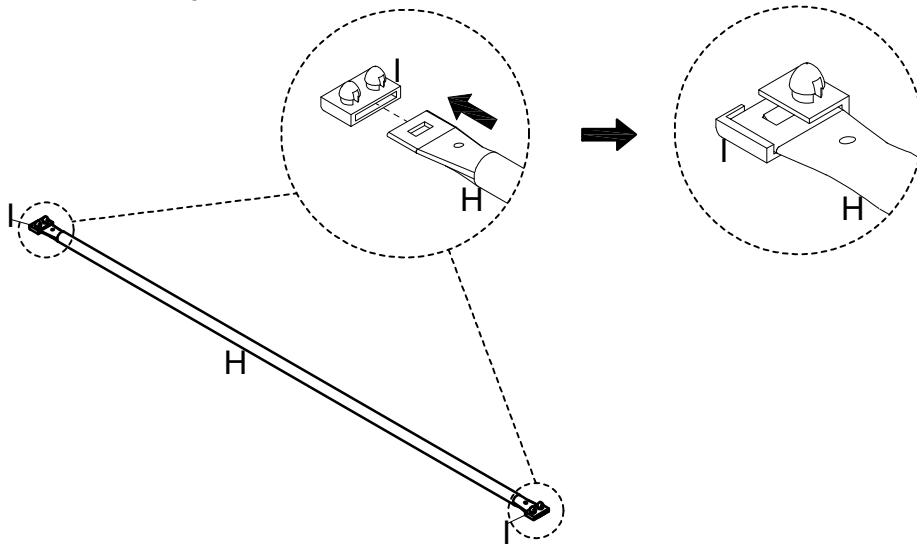

6

Attach the Slat (H) to rails, put the Slat Connectors (I) into the correct places and press them down.

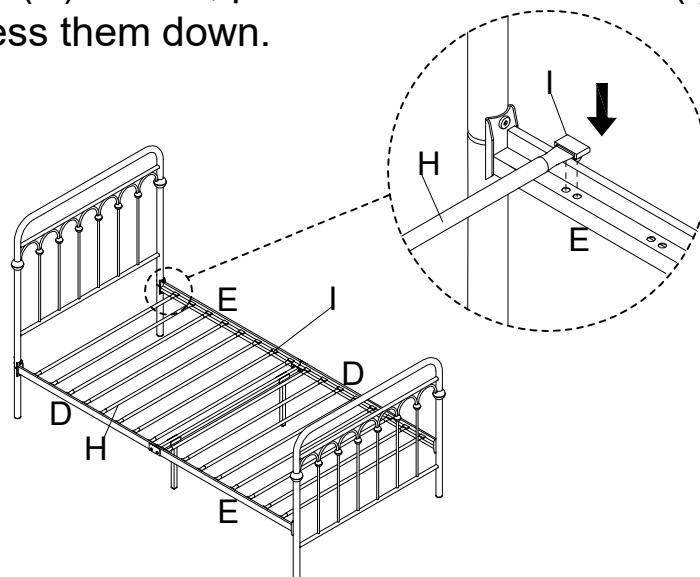

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.