
NIGHT STAND

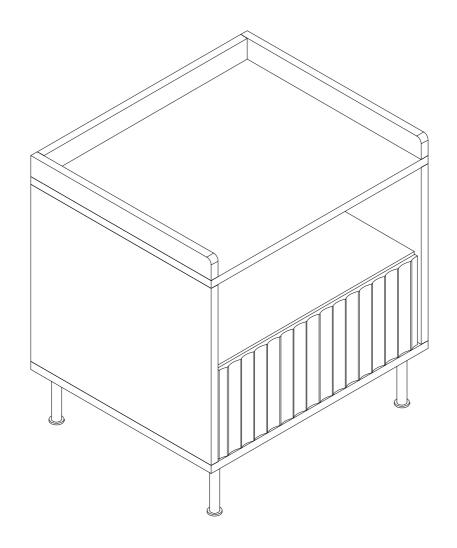


ASSEMBLY INSTRUCTION

HARDWARE LIST


A 12 PCS		B 12 PCS	C 12 PCS	D 8 PCS	E 17 PCS	E Designation of the second
F 16 PCS	& Days	CL 1 PC	CR 1 PC	DL 1 PC	DR 1 PC	


PARTS LIST

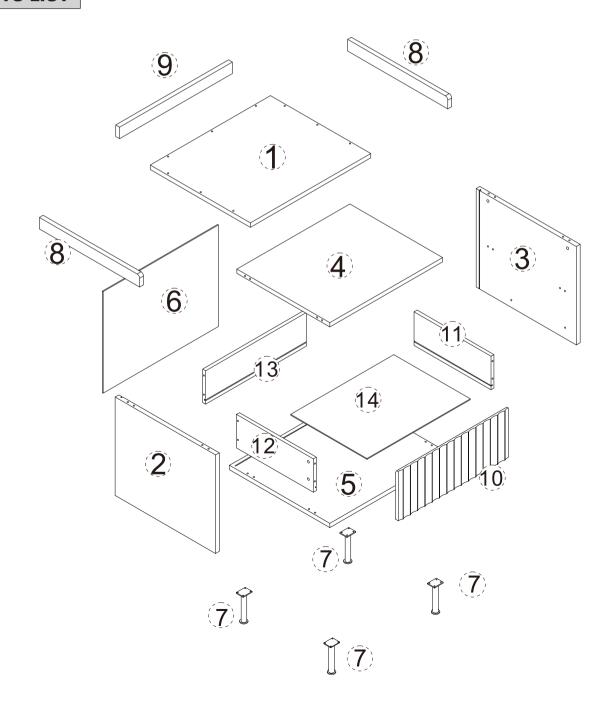

STEP 1.

Fix outer drawer runners (CL) and (CR) to parts 2 and 3 using screws (D), as shown. Insert quickfit screws (B) into parts 2 and 3, as shown.



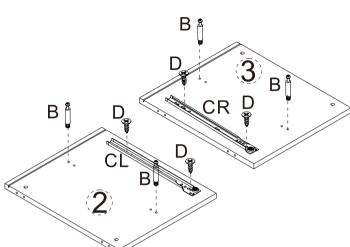










STEP 2.

Insert cam locks (A) and wooden dowels (C) into part 4. Fit parts 2 and 3 to part 4, as shown. Turn cam lock clockwise to tighten.








STEP 3.


Fix parts 8 and 9 to part 1 using screws (E), as shown.



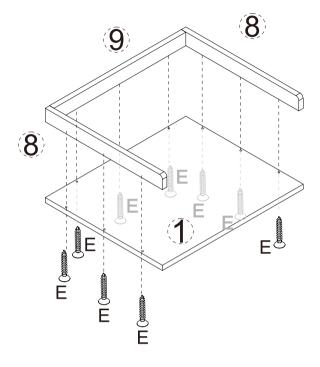

STEP 4.

Insert quickfit screws (B) and wooden dowels (C) into part 1. Insert cam locks (B) into parts 2 and 3 and attach to part 1, as shown. Turn cam lock clockwise to tighten.

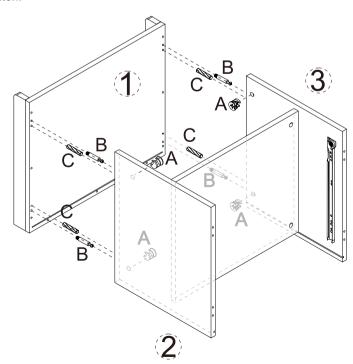









STEP 5.

Slide part 6 into grooves between part 2, 3 and 1, as shown.

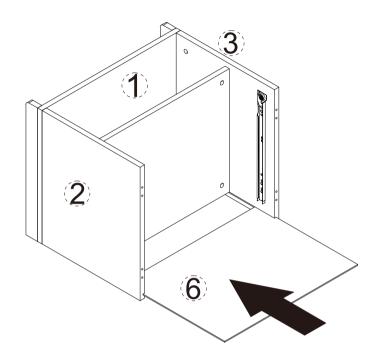

STEP 6.

Insert wooden dowels (C) into parts 2 and 3.Fix part 5 to parts 2 and 3 using screws (E), as shown.

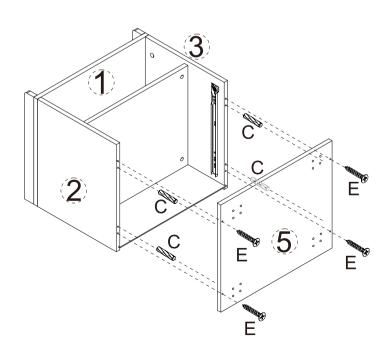






STEP 7.


Fix legs 7 to part 5 using screws (F), as shown.



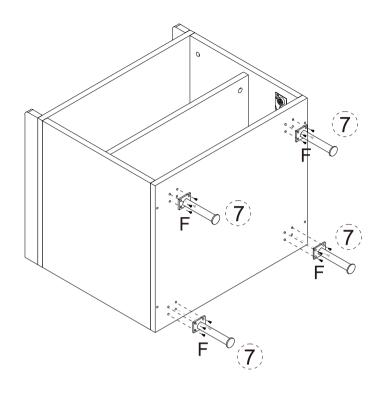

STEP 8.


Fix parts 11 and 12 to part 13 using screws (E), as shown.

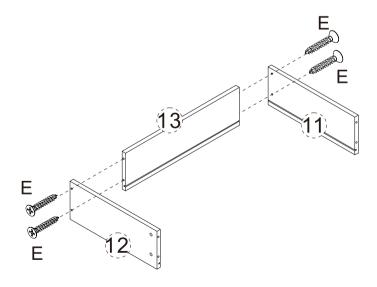




STEP 9.

Slide part 14 into grooves between part 11, 12 and 13, as shown.

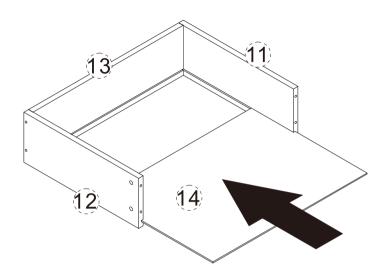

STEP 10.


Insert quickfit screws (B) into part 10. Insert cam locks (A) into parts 12 and 11. Fit part 10 to parts 12 and 11, as shown. Turn cam lock clockwise to tighten.

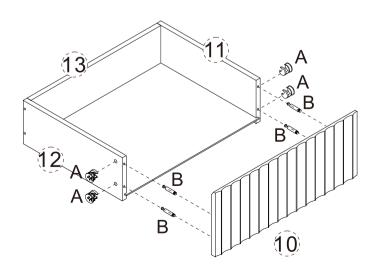



STEP 11.

Fix inner drawer runners (DL) and (DR) to assembled drawer using screws (D), as shown.

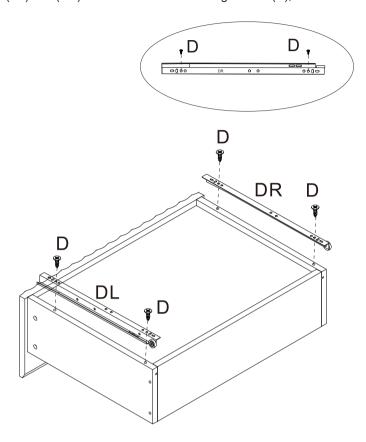



STEP 12.

