


ASSEMBLY AND INSTALLATION INSTRUCTIONS

X0045 / X0046

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.




Hardware Package:

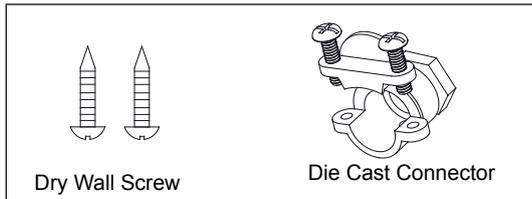


Installation Steps

Turn off the power at fuse or circuit box

1. Find a suitable location to mount the junction box. The mounting surface should be a minimum of 1/2" thickness.
2. Once you have determined the position where the junction box will be mounted, mark the corresponding knockout closest to your supply wire feed.
CAREFULLY REMOVE THE KNOCKOUT BY HAMMERING A FLATHEAD SCREWDRIVER OR PUNCH UNTIL THE SURFACE BREAKS. Use pliers and bend it back and forth until it snaps off if necessary. (See Fig.1)
3. Unscrew the set screw from junction box, and then remove the cover of junction box. (See Fig.2)
4. Attach the die-cast connector (included) by inserting the threaded end through the knockout. Secure the die-cast connector to junction box panel by tightening the 1/2" lock nut. (See Fig.3)

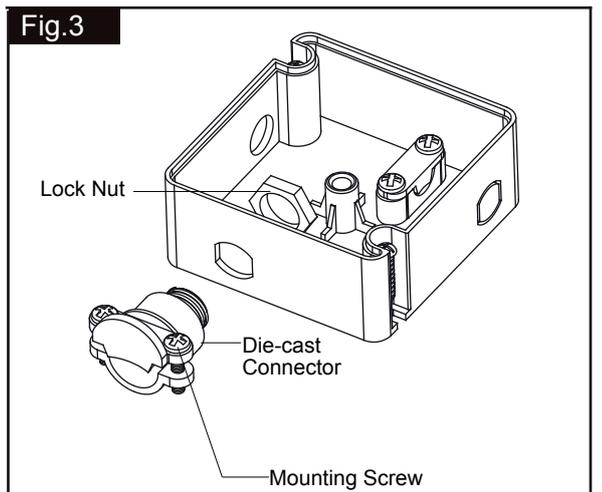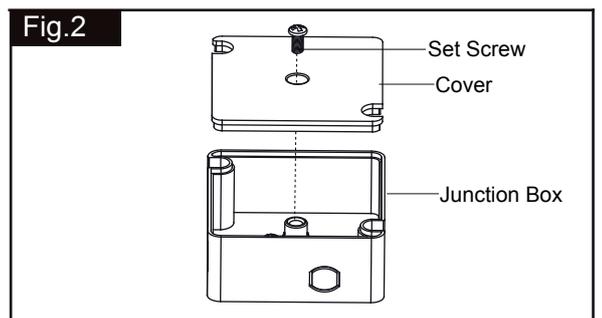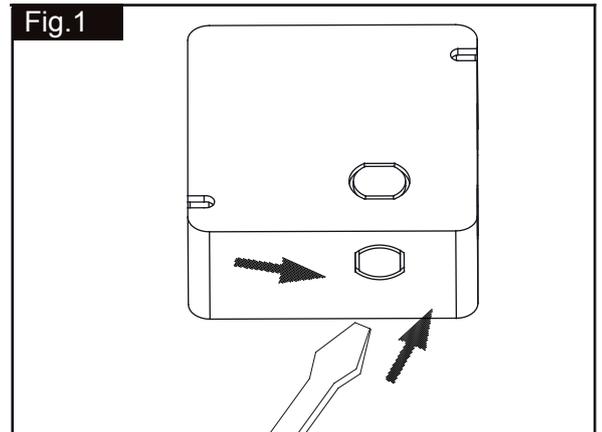


5. Attach the conduit to the die-cast connector and tighten the mounting screws on the die-cast connector so the conduit is gripped securely. Insert the cable through the die-cast connector with at least 6" of cable that extends past the cabinet junction box panel. (See Fig.4)

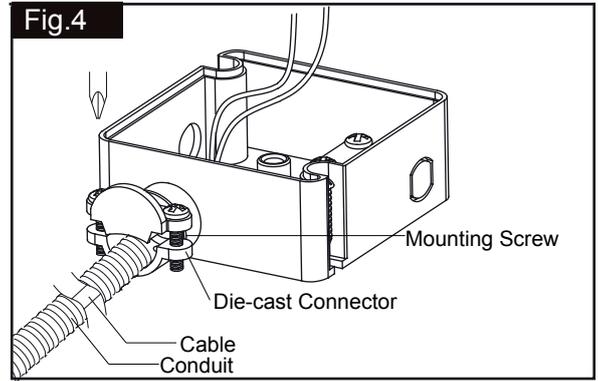

6. Place the junction box to the mounting surface and then secure it to cabinet with two dry wall screws. (See Fig. 5)

7. Cut off the power cord to needed length, thread the power cord through the hole of junction box, tear apart the power cord wire cover starting from the top of the cord. Use a knife to peel off the insulation of power cord from the top about 3/8" long to expose the copper for wiring. (See Fig.6)

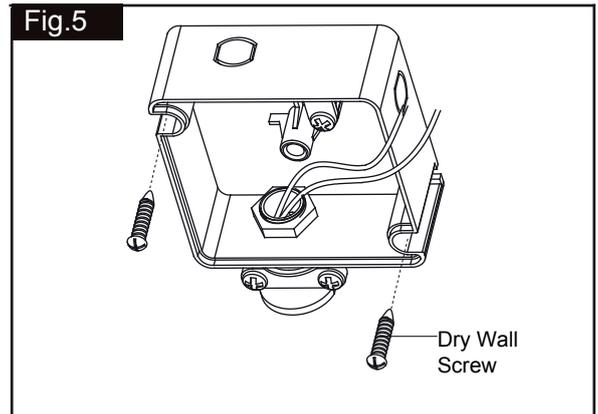


8. Loosen two small screws and pressing plate, put the power cord under the pressing plate, and then secure two small screws to have the pressing plate press the power cord.

9. Take a white wire and black wire from the power source and make wire connections with wire nuts: (See Fig.6)

---Connect the smooth-coated wire (marked) from the power cord to the black wire from the power source.

---Connect the ribbed-coated wire (unmarked) from the power cord to the white wire from the power source.

Carefully put the wires back into the junction box.

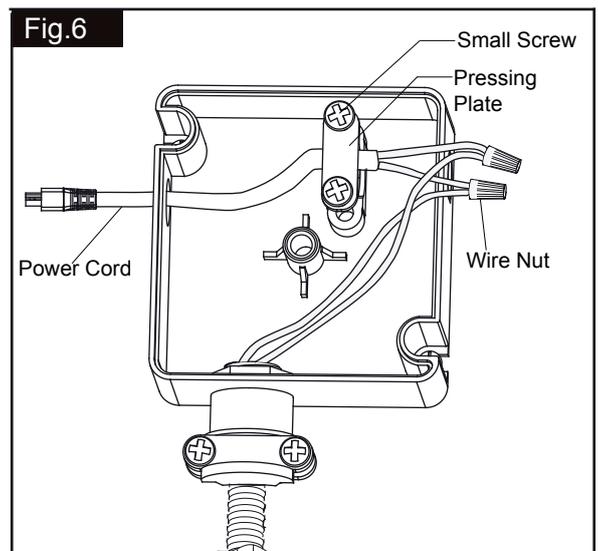

10. Re-attach the cover to junction box and then secure it with the set screw.

11. Plug the plug of power cord into the light.

Turn on the power at fuse or circuit box