

PCIPG-LED SERIES

LED Parking Garage Enclosed & Gasketed

Specifications:

Features:

- LED Enclosed and Gasketed
- Long life 60,000 hour LEDs at L80 for reduced maintenance
- 5100 Lumens
- UL 5VA Fiberglass housing with F1 weatherability rating
- Gasket is non-porous
- Internal reflector directs light into parking bays
- Impact modified acrylic lens equivalent to 100% DR
- Lens firmly secured with tamper resistance ready polyacetal (POM) latches
- Removable gear tray electrical access for modular replaceability
- Standard ambient -40°C to 25°C
- Includes surface mounting brackets

Images:






Compliances:

PCIVT-LED Series are built to UL 1598 and 2108 standards, and bear appropriate CSA labels. Ingress protection IP65, IP66 and IP67 standard. UL Sanitation certified. Damp location labeling is standard.

Warranty:

5 year warranty (Terms and Conditions Apply)

Dimensions:

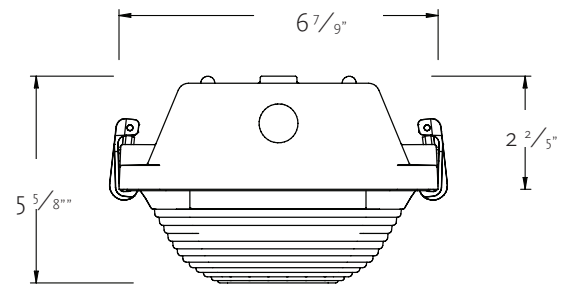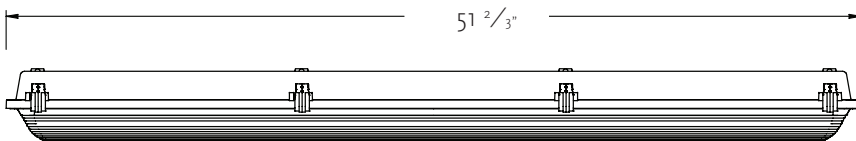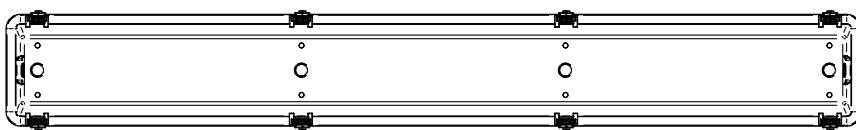

Catalog number:

Base	Lamp	Size	Color Temperature
PCIPG	LED	4 - 4'	40K - 4000K

PCIPG - LED SERIES

LED Parking Garage Enclosed & Gasketed

Photometric Data:

PCIPG-LED-4-40-K	
Fixture Lumens	4848
Watts	45.00
Mounting	SURFACE
Shielding Angle	0° = 90 90° = 90
Spacing Criterion	0° = 1.30 90° = 1.90
Luminous Option (LxWxH)	4.17' x 0.50' x 0.29'

Zonal Lumen Summary PCIPG-LED-4-40-K			
Zone	Lumens	% Lamp	%Fixt
0-30	634	13.1	13.1
0-40	1115	23	23
0-60	2357	48.6	48.6
0-90	4236	87.4	87.4
0-180	4848	100.0	100.0

Energy Data PCIPG-LED-4-40-K	
Total Luminance Efficiency	100.0%
Total Luminance per Watt	108
ANSI/IESNA RP-1-2004 Compliance	Noncompliant

INDOOR CANDELA PLOT

