

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 86792 86793

For Ceiling Mount Light Fixture


WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the single bar to the Junction Box with the two box screws as shown. The side of the cross bar marked "GND" must face out. **The junction box is not included.**
4. While holding the pan (A) towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
5. Raise pan (A) onto the junction box, aligning screws on single bar with mounting holes in fixture body and lock it securely with the hand screw(B).
6. Install the light bulbs in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**
7. Attach the glass shade (D) onto the pan(A), aligning screw hole on the pan with small hole in the glass shade(D), lock it with the screws(C).
8. Please turn the glass shade, adjusted to an appropriate angle.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

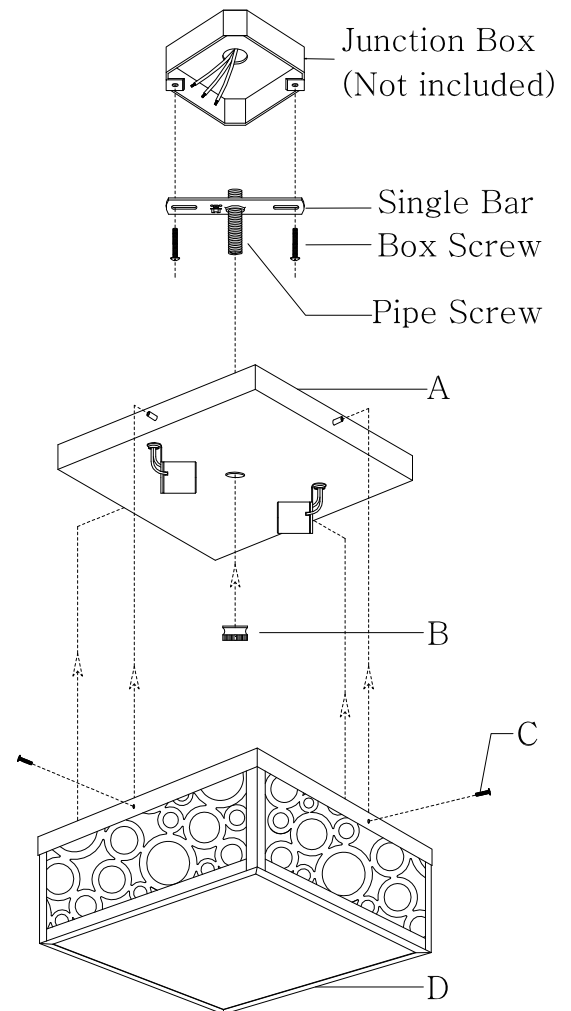

MIN 90°C SUPPLY CONDUCTORS

Fig.2

<p>FIXTURE WIRES</p> <p>Black or Smooth</p>		<p>FIXTURE WIRES</p> <p>White or Ribbed</p>		<p>FIXTURE WIRES</p> <p>Bare Copper (Ground)</p>	
<p>HOUSE WIRES</p> <p>Black (Hot)</p>		<p>HOUSE WIRES</p> <p>White (Neutral)</p>		<p>HOUSE WIRES</p> <p>Green or Bare Copper (Ground)</p>	