

One-Light Pendant

 Ceiling chain or stem mounted • Damp location listed **PROGRESS LED**


Description:

The one-light 12" pendant features industrial roots in both form and function. The Oil Brushed Nickel finish highlight the high-quality prismatic glass which adds to the historical aesthetic. Antique style fixture includes a hinge-locking nautical design. Perfect above a kitchen island in pairs or threes, use for additional ambience or task lighting in, breakfast nooks, islands, offices, and dining rooms or anywhere a pendant light can be placed. 3000k, 90+ CRI 1,211 lumens 71.2 lumens/watt per module (source).

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- Clear Fresnel glass lens
- LED Module is replaceable (part # 93053641)
- Brushed Nickel finish.
- Fresnel glass lens.
- Antique inspired with industrial roots
- Includes two 6", one 12", two 15" stems and 6 links of chain.
- Dimmable to 10% with many ELV dimmers
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- Two 6", one 12", two 15" lengths of stem included
- Six links of 9 gauge chain supplied
- ENERGY STAR® qualified

Performance:

| | |
|------------------------|-------------------------------------------------------|
| Number of Modules | 1 |
| Input Power | 17w |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Source) | 1211/71.2 (LM-82) |
| Lumens/LPW (Delivered) | 777/48.3 (LM-79) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 60,000 (L70/TM-21) |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Min. Start Temp | -30 °C |
| Max. Operating Temp | 30 °C |
| Warranty | 5 year warranty |
| Labels | cCSAus Damp location listed ENERGY STAR® qualified |

P5188-0930K9

Images:



Dimensions:

Diameter: 12-1/8"
 Height: 10-1/2"
 Overall Ht. W/Stem: 76-1/2"

Glass
 Width: 10-1/16"
 Length: 10-1/16"
 Height: 1"

P5188-0930K9

Photometrics:

| | |
|------------------------|-------------------------------------|
| ELECTRICAL DATA | P5188-0930K9 |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Input Current | 0.142 A |
| Input Power | 17 |
| Power Factor | Greater than 0.90 |
| THD | <20% |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature | -30 °C to 30 °C |
| Dimming | Yes* |

*See Dimming Notes for more information


P5188-0930K9
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 777
 Fixture Efficacy: 48.3
 Spacing Criteria: 0.9

CANDELA DISTRIBUTION

| DEG | CANDELA | LUMENS |
|-----|---------|--------|
| 0 | 455 | |
| 5 | 401 | 38 |
| 15 | 369 | 103 |
| 25 | 300 | 140 |
| 35 | 239 | 154 |
| 45 | 209 | 157 |
| 55 | 121 | 109 |
| 65 | 51 | 52 |
| 75 | 17 | 19 |
| 85 | 4 | 5 |
| 90 | 0 | |

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | %FIXT |
|--------|--------|-------|
| 0-30 | 281 | 36.2 |
| 0-40 | 435 | 55.9 |
| 0-60 | 701 | 90.2 |
| 0-90 | 777 | 100.0 |
| 90-180 | 0 | 0.0 |
| 0-180 | 777 | 100.0 |

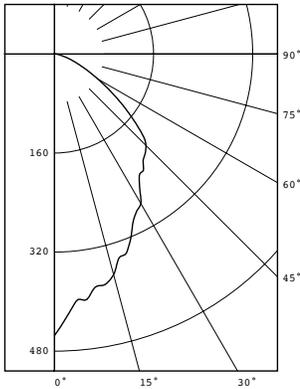

Test 8888 Test Date 04/10/14

P5188-0930K9

Dimming Notes:

P5188 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.