



PIONEER INDUSTRIES, INC.
3325 S. Garfield Ave.
Commerce, CA 90040
(800) 338-9468
www.pioneerind.com

INSTALLATION

Tools:



Adjustable Wrench



Plumbers Putty



Teflon Tape



Rags

Model Number: 3VL160, 3VL161, 3VL161G (CP, PVD BN)


Warnings and Notes:

Check with local plumbing code requirements before installation.
This product should be installed by a local listed plumber.
Do not use plumbers putty on threads.




Installation Steps:


Single Handle Lavatory Faucet




(1) Shut off water supplies. Remove old faucet. Clean mounting surface in preparation for new faucet.



(2) Thread mounting bolts to faucet body. Ensure washer is under escutcheon, slide escutcheon (for 1-Hole Installation) or deck plate (for 3-Hole Installation) from bottom of the faucet. Insert inlet supply hoses through mounting hole, slide mounting washer and mounting bracket along the mounting bolt from underneath of the sink. Tighten mounting nut to mounting bolt to secure faucet in position.




(3) Connect hot and cold inlet supply hoses to supply stops. For 1/2" connection; use 3/8" male to 1/2" female adapter for installation. Adapters are optional and not provided with faucet. Turn on both side supply stops.




(4) Important: After installation is complete, remove aerator. Turn water supplies on and allow both hot and cold water to run at least one minute each. While water is running, check for leaks. Turn off water and replace aerator.


Pop-up Drain Installation:




(1) Remove pop-up flange from body




(2) Place a ring of putty on the bottom of flange.




(3) Insert pop-up flange through drain hole and attach flange to body. Ensure the pop-up outlet faces towards the back of the sink. Tighten the locknut securely with a wrench. Do not overtighten.




(4) Remove the excess putty. Connect the trap (check manufacturer's instructions for installation)



(5) Remove pivot rod nut from pop-up body, ensure the washers is in place, insert pivot rod, tighten pivot rod nut back to pop-up body.



(6) Push pivot rod down, insert drain plug carefully. Test to ensure drain plug works properly.




(7) Connect lift rod strap to pivot rod by using clip. Tighten the thumbscrew to connect lift rod strap to pop-up lift rod.

Exploded Drawing :

* Note: Please specify finish/color when ordering.

	ITEM #	DESCRIPTION
A	X-1300007*	Vellano Lever Handle
B	X-4300037*	Cap
C	X-4200035	Locknut
D	X-3200005	Ceramic Disc Cartridge
E	X-4900081*	1.5 GPM Aerator
F	X-4300038*	Deck Plate
G	X-4300039*	Escutcheon and Washer
H	X-5300007	Mounting Kit
I	X-6300009*	Brass Pop-Up Drain (For 3VL160)
J	X-6300002*	Brass Grid Drain (For 3VL161G)
1	X-4900064*	Hole Cover
2	X-4900027	Red/Blue Index Button
3	X-4900002	Allen Screw

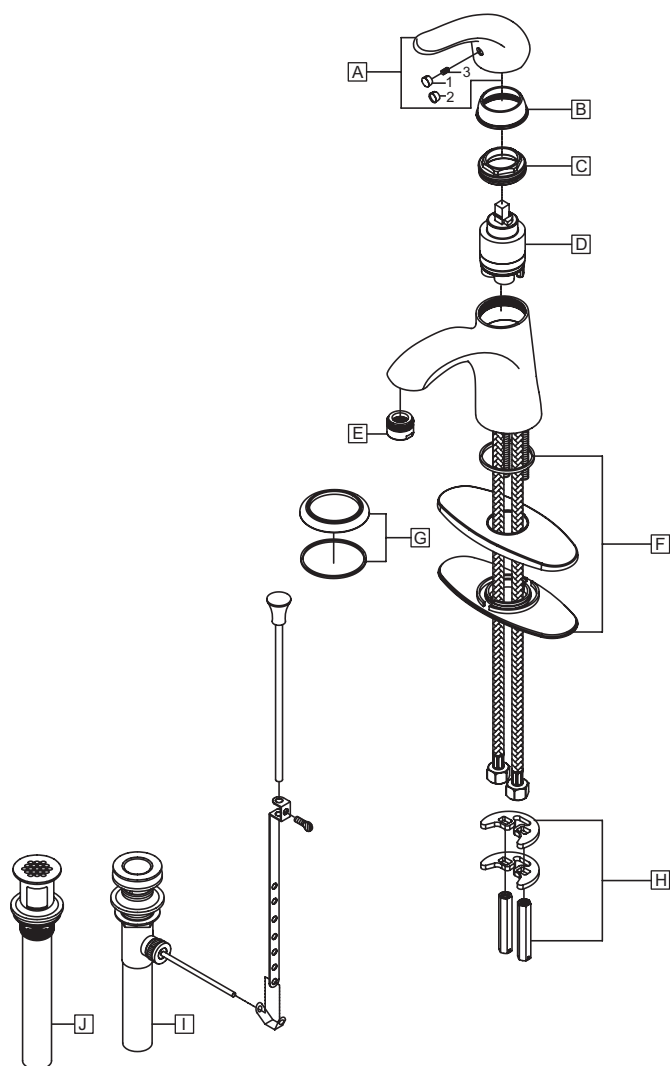

For more care information or trouble shooting inquiries about your Pioneer product, please call:

Pioneer Industries, Inc. (800) 338-9468

8AM - 8PM EST (5AM to 5PM PST)

www.pioneerind.com