


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0380

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):

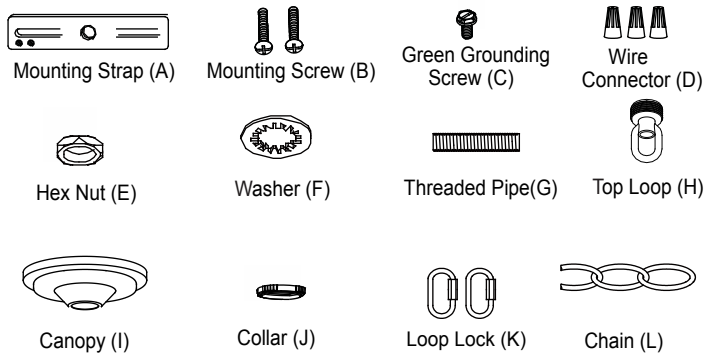


Installation Steps

Turn off the power at fuse or circuit box

1. Attach the threaded pipe to the mounting strap, and then secure it with a washer and a hex nut.
2. Attach mounting strap to outlet box using two mounting screws.
3. Secure the top loop to the threaded pipe.
4. Unscrew the two set screws and remove metal frame from the fixture, take a glass panel and gently slide it into the metal frame in place, secure it by pressing two clips on top side, of the metal frame and two clips on the bottom of the metal frame. Repeat with the other glass panels. (See Fig.1)

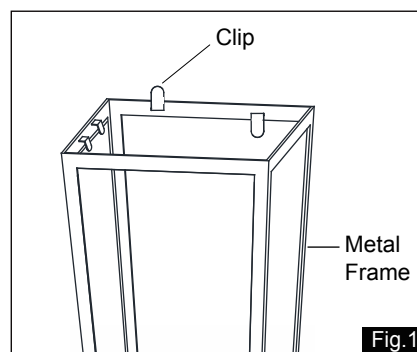

5. Install a bulb (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
6. Attach the metal frame onto the fixture and tighten it with set screws.
7. Connect the chain:
 - Determine length of needed chain to achieve desired fixture height. (To remove excess chain section, use pliers to bend link open.)
 - Weave the fixture wires and fixture grounding wire through the chain, collar and canopy.

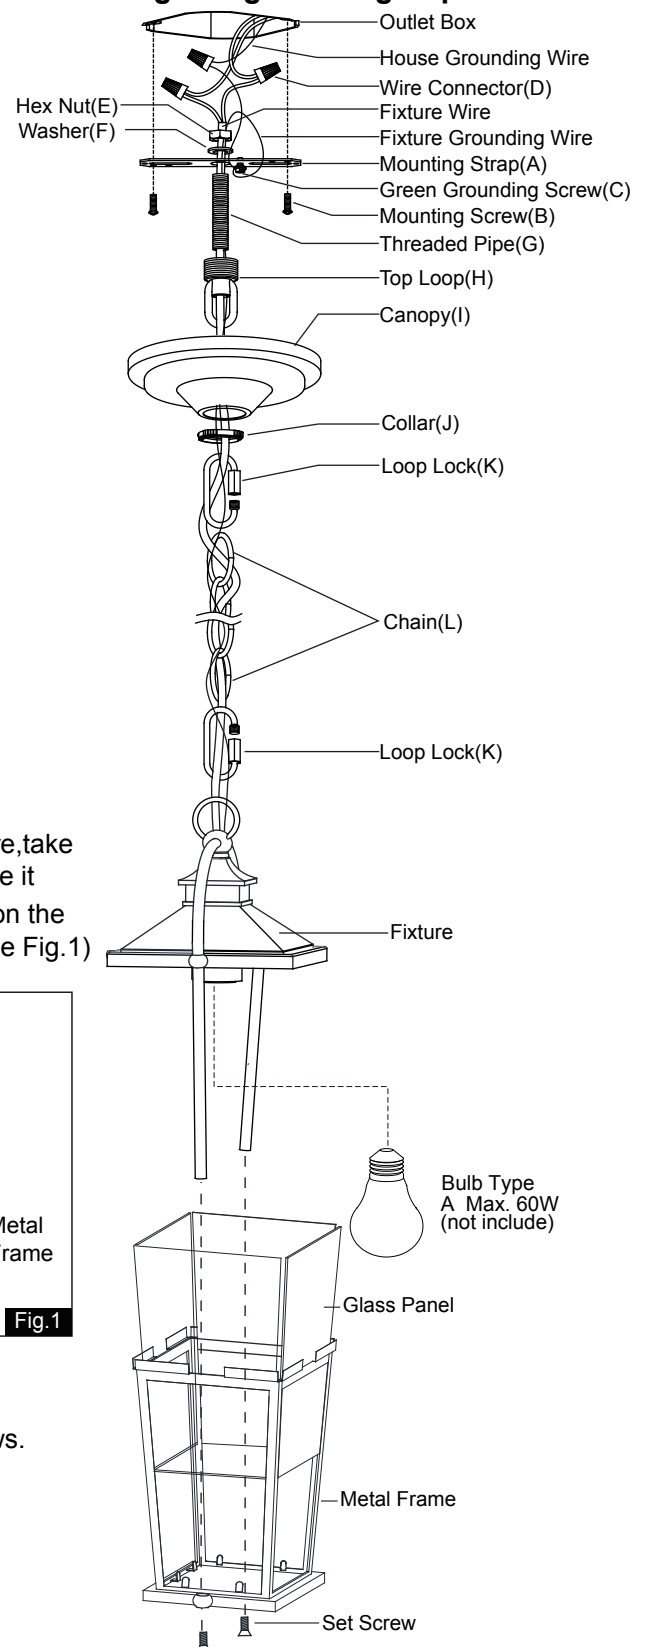

VAXCEL




171205

8. Connect one end of the chain to the loop using a loop lock.
9. Connect the other end of the chain to the top loop using the other loop lock.
10. Thread the fixture wires and fixture grounding wire through the top loop, threaded pipe and mounting strap.
11. Pull out the source wires from the outlet box. Make wire connections using wire connector as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the Mounting Strap with the green grounding screw, then connect it to the house grounding wire with the wire nut.
 Carefully put the wires back into the outlet box.
12. Attach the canopy to the mounting strap by inserting the top loop, and then secure it with the collar.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

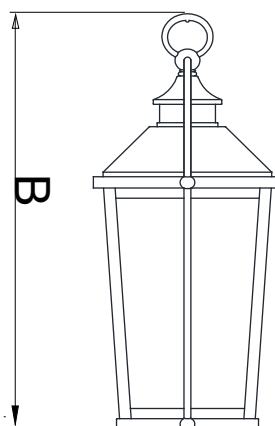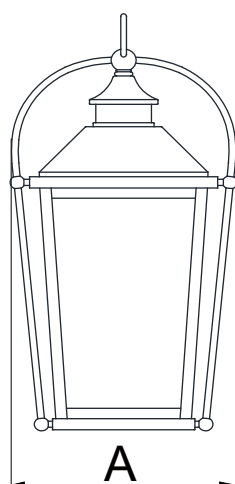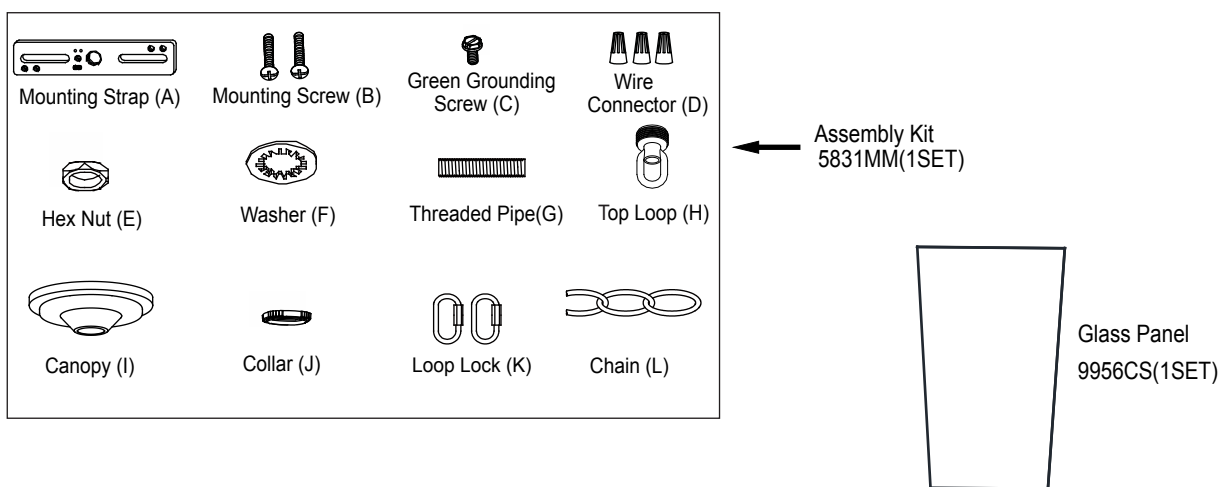

A: 7.75"

B: 15"