


see what Delta can do™

LAVATORY FAUCETS

■ Single Handle Deck Mount

Submitted Model No.: _____

Specific Features: _____

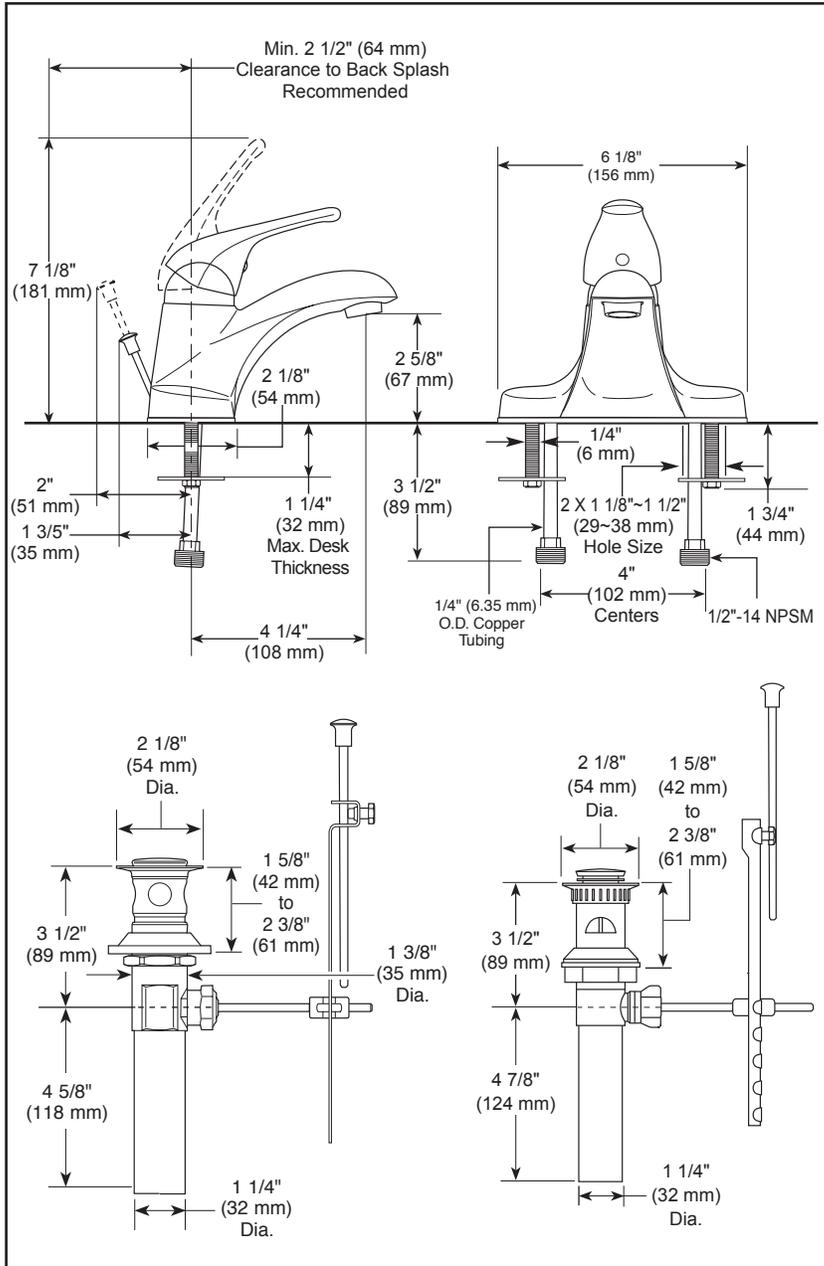

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Max flow rate: 1.2 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Solid brass fabricated body
- Single handle lavatory faucets for exposed mounting on 3 hole sinks with 4" centers
- All operating parts shall be replaceable from the top
- Control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats
- Control handle shall return to neutral position when valve is turned off
- Metal drain with pop-up type fitting with plated flange and stopper
- Models with "PPU" have plastic pop-up type fitting with plated flange and stopper
- Models with "LH" no drain and no lift rod hole

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- ♿ Indicates compliance to ICC / ANSI A117.1
- EPA WaterSense®

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.