



# Underscore® Rectangle

## 5.5' VibrAcoustic® Bath

### K-1822-VBW



#### Features

- VibrAcoustic calms and soothes with sound vibration technology.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Four original instrumental compositions offer different levels of relaxation.
- Syncs with devices enabled with BLUETOOTH® wireless technology including smartphones, MP3 players, tablets, and laptops located up to 33 feet away.\*
- Customize your experience with the high-resolution color touch screen.
- Fully adjustable volume above and below the water.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Three heat settings allow you to customize the surface temperature.
- Clearflo slotted overflow for deep soaking.
- Includes 25 feet of wiring and amplifier.

#### Material

- Acrylic

#### Hydrotherapy

- VibrAcoustic

#### Installation

- Drop-in or under-mount.
- Requires 110V electrical service.

#### Additional Hydrotherapy Options

- Soaking Bath - K-1821-0
- Soaking Bath + Bask heated surface - K-1821-W1
- BubbleMassage air bath - K-1822-G
- BubbleMassage air bath + chromatherapy - K-1822-GCR
- VibrAcoustic + BubbleMassage air bath - K-1822-GVB
- VibrAcoustic + BubbleMassage air bath + Bask heated surface + chromatherapy - K-1822-GVBCW
- BubbleMassage air bath + Bask heated surface - K-1822-GW
- Whirlpool + heater - K-1822-H2
- VibrAcoustic - K-1822-VB
- VibrAcoustic + chromatherapy - K-1822-VBC
- VibrAcoustic + chromatherapy + Bask heated surface - K-1822-VBCW
- VibrAcoustic + Bask heated surface - K-1822-VBW
- Whirlpool + BubbleMassage air bath - K-1822-XH2G

#### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain



#### Codes/Standards

CSA B45.11/IAPMO Z401

ASTM E162

ASTM E662

UL 1795

Greenguard UL 2818 - Gold

#### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

5-25-2019 06:22 - US/CA


THE BOLD LOOK  
OF **KOHLER**®

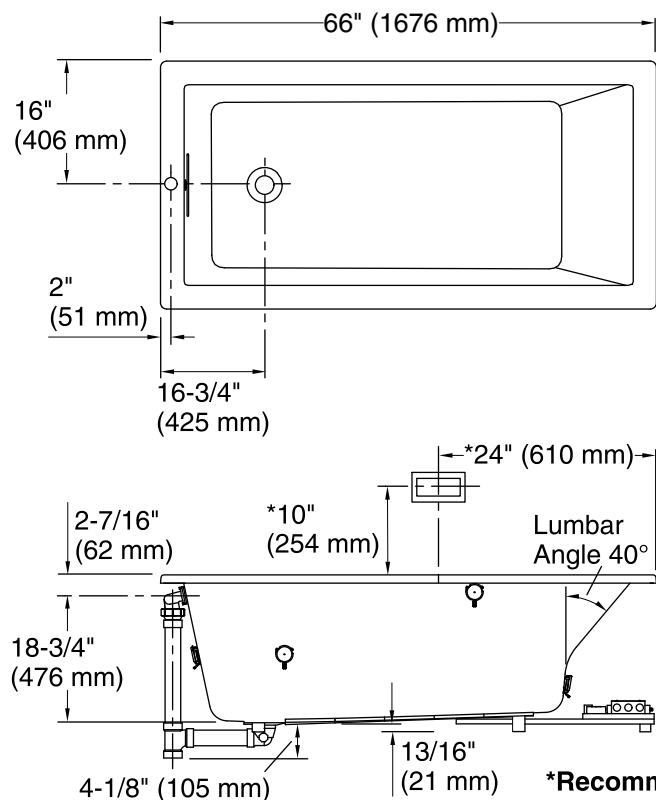


No change in measurement if connected with drain illustrated. (K-7272)



**Drop-In Rim Detail**

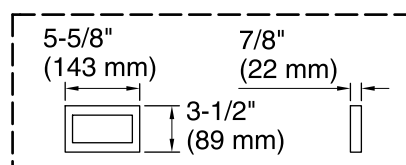


**User Interface**

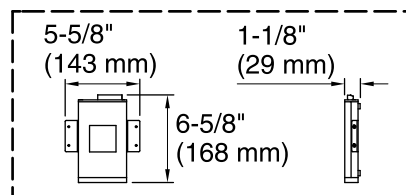

**Amplifier**

Control Access  
30" (762 mm) W  
x 15" (381 mm) H  
Min

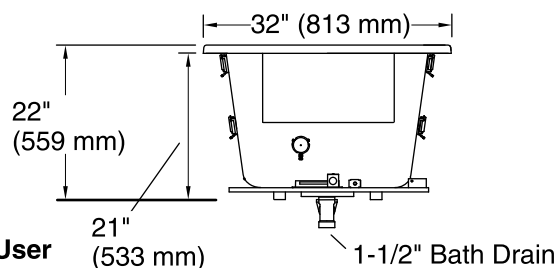

**\*Recommended User Interface Location**

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Amplifier, Heated Surface: 120 V, 15 A, 50/60 Hz

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	End
Basin area, bottom:	44-1/2" x 22-5/16" (1130 mm x 567 mm)
Basin area, top:	59-5/8" x 25-1/2" (1514 mm x 648 mm)
Weight:	96 lbs (43.5 kg)
Minimum floor load:	58 lbs/ft² (283.2 kg/m²)
Water depth:	18" (457 mm)
Water capacity:	85 gal (321.8 L)
Cutout:	Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)
Electrical component rating:	Amplifier: 120 V, 50/60 Hz Heated Surface: 120 V, 0.5 A, 50/60 Hz, 65 W

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.