


Single Sink Vanity Guide

TOOLS NEEDED FOR ASSEMBLY

(not included)

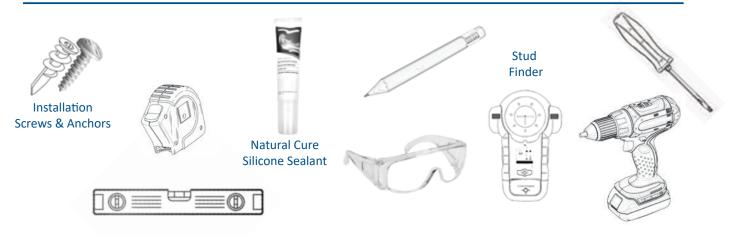

Questions, problems, missing parts? Before returning, call our customer service department: 844.404.4242, 8:00 a.m. - 5 p.m., MST Monday - Friday or e-mail us at: support@novatto.com

THANK YOU

We would like to take this opportunity to thank you for choosing Novatto. We hope you are truly satisfied with our product(s) and enjoy it for years to come. As a small business, we learn the most from you, the customer. Please visit the link below to leave us a review along with high res images and you could win a \$25 Amazon or Visa gift card.

It's easy as...

- Go to novatto.com
- In the search bar, type in model ID
- Click on your model; scroll down
- On the right, click Write a review
- Review, submit and enjoy!



Novatto I P: 844.404.4242 support@novatto.com Novatto.com









Steps to Complete Your Project

Please Note:

- Review and abide by all building and plumbing codes.
- We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures, countertops and plumbing.
- Our counters do NOT require any drilling or cutting. Drain and faucet holes are pre-dilled for you!
- Vanity has a hole pre-cut in the back for plumbing and is pre-assembled! Only the door handles need to be attached.
- Use the vanity's specification sheet as a reference when planning the vanity's placement. The spec sheet can be found/downloaded from the product's page on Novatto's website.
- The vanity's specification measurements are approx. and slight variations may occur; we highly recommend performing any rough-in procedures with the vanity on site.

Novatto's vessel sink (if purchased) is to be installed sitting on the stone countertop (if purchased), on top of the *mounting ring if the ring and drain were purchased. After the vessel sink is mounted on top of the counter, the vessel height will be between 34"to 36".

*A mounting ring adds stability to rounded bottom sinks as well as raises the sink up by half an inch for easy underneath cleaning.


- Ensure the bathroom floor is level.
 Also make sure there is adequate support behind the bathroom wall if you will be using the tip-resistant strap provided or securing the vanity to the wall.
- Unpack the pre-assembled
 vanity and inspect for any shipping
 damages. If OK, jump to the next
 step. If not, contact Customer
 Support at: support@novatto.com
 or 844-404-4242.

INSTALLATION INSTRUCTIONS




Vanity, Hardware & Countertop

- Attach a door handle to each door using the provided door handle screws.
- Determine the location of the vanity and mark the area on the wall where it will be installed.

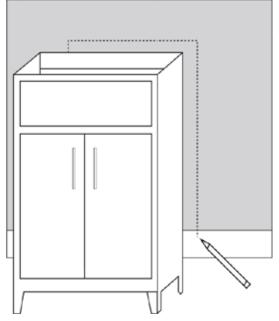

ASSEMBLY

• Locate and mark the location of the studs, utilizing your stud finder, if you choose to secure the vanity to the wall and will be using the tip-resistant strap provided or are selecting to screw the vanity directly to the wall. (If not using one of these methods, skip to the next step.)

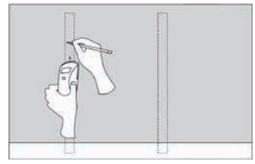

• Place the vanity in the installation location. Verify the vanity cabinet is level. If the vanity is not level, using a leveler, adjust the feet up to 1/2-inch if necessary.

• If attaching the vanity to the wall, here is one of two methods: (1) screwing through the mounting rail in the back of the vanity cabinet into the wall studs.







IMPORTANT: Consult an expert for the proper screws/bolts/anchor sleeves to use when attaching to various wall constructions. The screw provided with the tip-resistant strap is **NOT** to be used for this method.

TROUBLESHOOTING TIPS

| <u>Issue</u> | <u>Reason</u> | <u>Solution</u> |
|---|--|--|
| Vanity wobbles or appears to lean to one side | Vanity or floor is slightly uneven | Use a leveler and adjust the self-adjusting feet until level |
| Vanity feels unstable or not secure | Vanity might need to be braced or reinforced | Secure vanity to wall w/ either provided tip- |

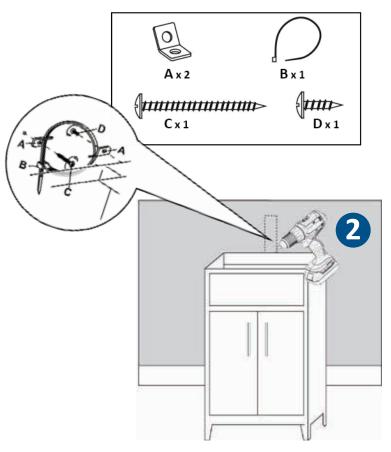

- Method (2) using the tip-resistant strap. (If not using one of these two methods, skip to the next step.)
- Apply a small bead of silicone around the top



perimeter of the vanity body. With assistance from another person, slowly and carefully set the counter top onto the vanity cabinet. Once positioned, press firmly into place.

Wipe away any excess sealant using a damp cloth. If adding a backsplash go to the next step. If done, skip to the last step.

• If installing a backsplash, place a generous

amount of silicone sealant on the back of it and press it into place against the bathroom wall. Fill any gaps left with silicone sealant. Wipe away any excess sealant with a damp cloth.



Allow the silicone sealant to dry, which could take up to 24 hours.

WARRANTY

Novatto products have been made under the highest standards of craftsmanship and quality. Each product of ours undergoes strict quality control testing to ensure years of enjoyment. Novatto offers a warranty for defects in workmanship and/or materials when the product was purchased through an authorized Novatto dealer.

Novatto's vanities are backed by Novatto's Lifetime Limited warranty. Novatto warrants to the original consumer purchaser for as long as the original consumer purchaser owns their home (the "Warranty Period" for homeowners), this sink will be free from defects in material and workmanship. All other purchasers including purchasers for industrial, commercial and business use are excluded from this warranty. Warranties are not transferable, between homes or owners and are only applicable to residential use.

Under no circumstance will Novatto be held responsible for any damage as a result during or after product installation. We will not be responsible for any labor or installation charges, freight cost, lost profit or any other expenses associated with a defective product. Novatto's only responsibility is the replacement, exchange, or repair of a defective product. Novatto will not be responsible for product failures due to lack of maintenance. We will not be

Get the most out of your Novatto product by registering!

By registering, you verify Novatto product's warranty. Plus you will receive helpful tips, learn of special events and much more!

held responsible for any damage or product failure due to improper installation, misuse, or failure to use a licensed professional. Please read the care and maintenance documentation to determine the limits of proper use.

If you believe you have a warranty claim, contact Novatto, either through your local Dealer, Plumbing Contractor, Home Center, or by writing: Novatto Inc, Attn.: Product Support, 3533 E. Corona Ave., Phoenix, AZ 85048, USA. Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, the date the product was purchased and from whom the product was purchased. Also include the original sales receipt. For other information, or to obtain the name and address of the service and repair facility nearest you, email: support@novatto.com.

Novatto makes no implication our products comply with any or all local building or plumbing codes. It is the consumer's responsibility to determine local code compliance. This warranty extends to the original purchaser and first consumer.

Need more help?

Feel free to contact our technical support anytime at 844.404.4242 or email us at support@novatto.com. More information is also available at www.Novatto.com.



Glacier Ice Kits

Glacier Ice
(if included) will
not only protect the
stone products but
also any faucets, as
well as porcelain and
glass sinks from hard
water and mineral
buildup. This presoaked cloth will
cover up to 40 sq. ft.

Glacier Ice Faucet and Sink professional sealer kit will not only



restore stone products but also sinks, faucets, and shower doors from mineral buildup and hard water spots. It will also protect from future mold, corrosion, oxidation and mildew. Treats up to 100 sq. feet.


Wood Care

With all the water in the bathroom, it can be a demanding place for wood furniture. Our vanities have been sealed and finished to last for years of enjoyment, but maintenance is key. As with any finish it can be taken off with the use of harsh chemicals or cleaners. After a basic cleaning the best way to protect the finish is to use a soft paste wax and use as directed. When used as directed this will bring a beautiful shine to the finish which will last for months.

As with other natural materials, the vanity's wood can be affected by environmental factors such as natural and/or artificial lighting. Darkening or mellowing of the wood can be expected; a natural process as the wood ages. *Caution:* Do NOT use metal brushes, or scouring pads when cleaning the vanity, countertop, or backsplash as this may scratch them. Damage due to use of cleaners containing abrasives, alcohol or other organic solvents, whether performed by a contractor, service company, or yourself, are excluded from the warranty.

Counter and Sink Care

Novatto's stone countertops, and sinks are incredibly easy to clean and maintain. Upon installation wipe them down and then seal the surfaces with the included Glacier Ice wipe. And to keep them in pristine condition, simply wipe them down with a soft cloth and mild soap, then rinse and dry. When a deeper cleaning is needed, we highly recommend using Glacier Ice Cleaner and Restorer (NOV-GI-RSS) or any other non-abrasive cleaner.

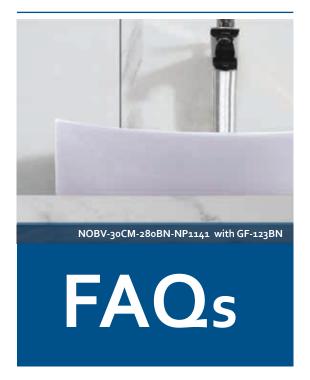

Can I order custom sizes or finishes?

At the moment, we only have what's offered in select sizes. We try to offer as many options as possible with tops, finishes and sinks. Of course, for large quantity orders, we can accommodate any size or style. Please reach out to us at sales@novatto.com for pricing.

What faucets would pair and fit with the pre-drilled hole placement?

Most vessel sink and vessel faucet combinations will work with the pre-drilled hole set-up. These faucets will work with the faucet hole placement:

BM-008 Series GF-135 Series BM-012 Series GF-136 Series BM-114 Series GF-163 Series BM-116 Series GF-365 Series GF-123 Series GF-368 Series

The vanity seems to wobble, how do we fix this?

There are adjustment levelers on the bottom of each foot to accommodate any floor.

What is the best way to care for the counter, sink and cabinet?

To keep everything looking like new simply apply the included Glacier Ice sealer. It works well on glass, ceramic and stone, though it is not as effective on wood but it can be used.

For everyday cleaning simply use a mild soap and water or a non-abrasive cleaner. Novatto's Glacier Ice Cleaner and Restorer (NOV-GI-RSS) will provide a deeper clean and lasting sealant for the countertop and sink.

What is the best way to attach the backsplash?

We recommend applying an adhesive to the bottom of the backsplash to secure it to the counter and then if desired seal the edges to the wall.

May I use a vessel sink, faucet or drain from another vendor?

Yes. Faucets, drains and sinks from other manufacturers will be compatible with our vanities. Be aware though, the pre-drilled holes are 1.625" for standard vessel sink drains and 1.5" for standard vessel faucets.

What is FSC certified wood?

FSC stands for Forest
Stewardship Council (FSC).
Wood which has FSC
certification is the best
type of wood to use for
any wooden project.
FSC certification is
the best indicator the
wood being used was
harvested sustainably.

What is the best way to attach the counter top?

For our vanities the best way is to simply apply an adhesive to the four corners of the vanity.

Can I order the cabinet only and use my own top?

Certainly, we understand there are more than three counter top colors out there!



More questions? Feel free to contact our technical support team anytime. More info is also available at our <u>website</u>.

Novatto I P: 844.404.4242 <u>support@novatto.com</u> Novatto.com

