

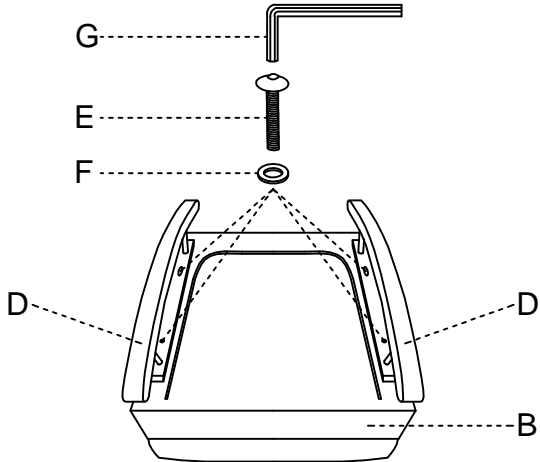
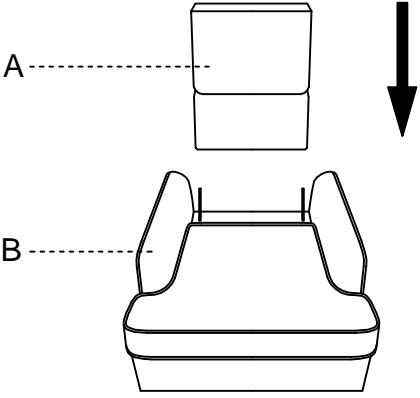




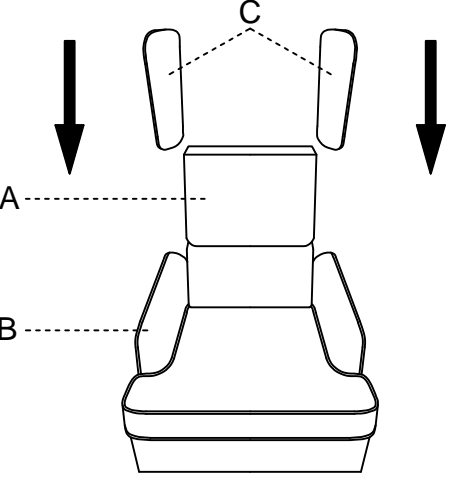
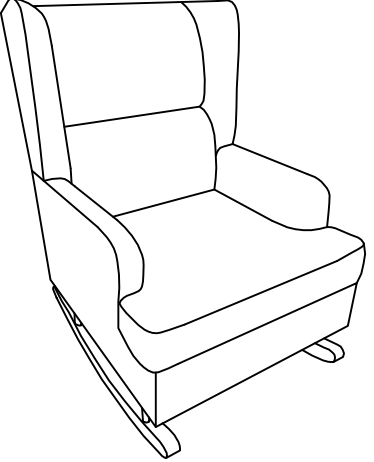




Assembly Instructions

Item No:RKDT0245/RKDT0246

<p>A*1</p> 	<p>E*4 M8*50mm</p> 	<p>① Place the Seat B on a clean padded surface. Use bolt E, flat washer F, allen key G to connect the Feet D to bottom of the seat cushion B, fasten all bolts to secure.</p> 	<p>② Carefully align male and female bracket then insert backrest A into space between armrest, push all the way down to secure.</p> 
<p>B*1</p> 	<p>F*4 M8*20*1.8mm</p> 		
<p>C*2</p> 	<p>G*1</p> 	<p>③ Carefully align male and female bracket then attach left/right wing C to side of armrest, push down and adjust the height of the wings to set leveled.</p> 	<p>④ Assembly completed.</p> 
<p>D*2</p> 	<p>H*1 M8*50mm</p>  <p>EXTRA PARTS</p>		