


## ASSEMBLY & INSTALLATION GUIDE

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX / CIRCUIT BREAKER BEFORE INSTALLATION.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

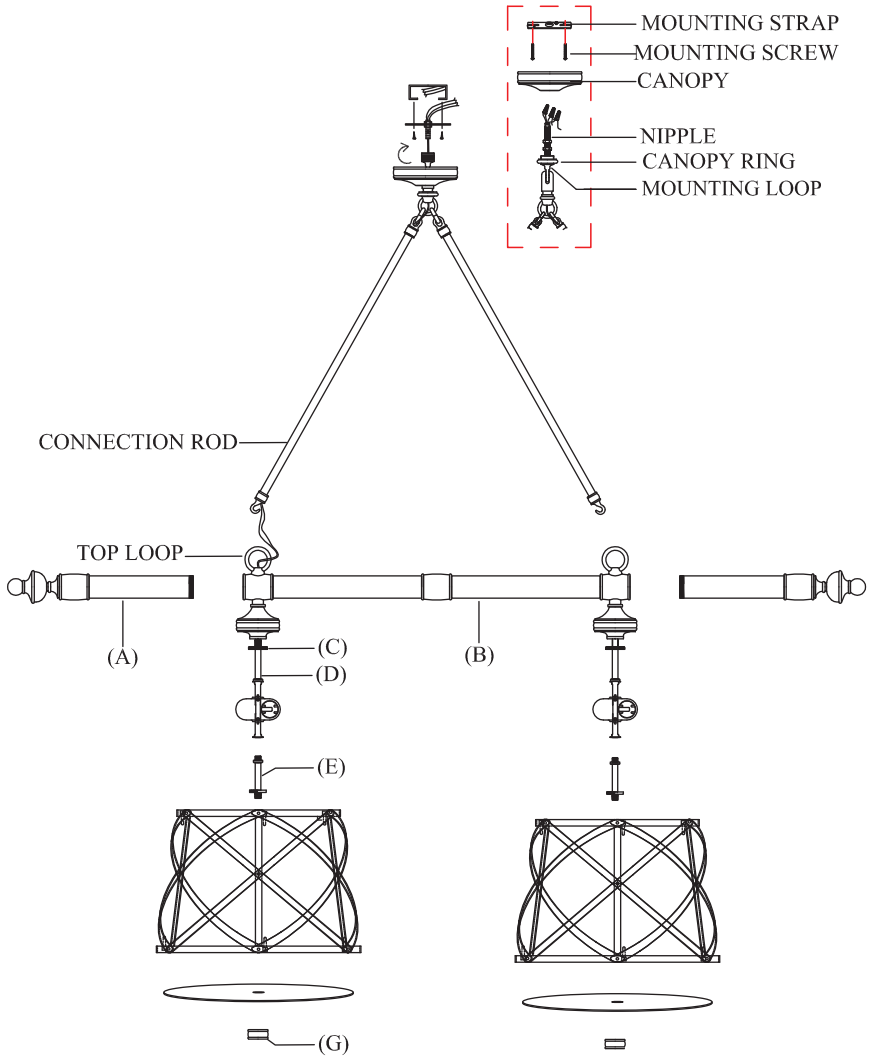

1. Hook connection rods to top loops.
2. Thread end finial (A) into both end openings of part (B).
3. Insert thread nipple in mounting strap and secure by using hex nuts provided.
4. Attach mounting strap to ceiling outlet box and secure by using mounting screws provided. Step 5 unscrew canopy ring and slide canopy ring on mounting loop.
5. Slide canopy on mounting loop.
6. Attach ground wire (bare copper) from fixture to ground wire from ceiling outlet box (usually green or copper in color), and fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect the neutral wire (white) from fixture to the neutral (usually white) wire from ceiling outlet box. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
9. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Attach mounting loop to nipple. Step 11 Wire chandelier in outlet box.
11. Slip canopy to ceiling and secure with threaded canopy ring.
12. Thread top nipple of rod (E) to bottom opening of rod (D).
13. Attach shades to the threaded section above rings (C) and secure the shades by tightening rings (C).
14. Insert light bulbs into the sockets.
15. Attach diffusers to the bottom of shades, letting the nipples of rods (E) pass through the holes of diffusers and secure with finials (G).