




Item # : DBW60TR
Assembly Instructions

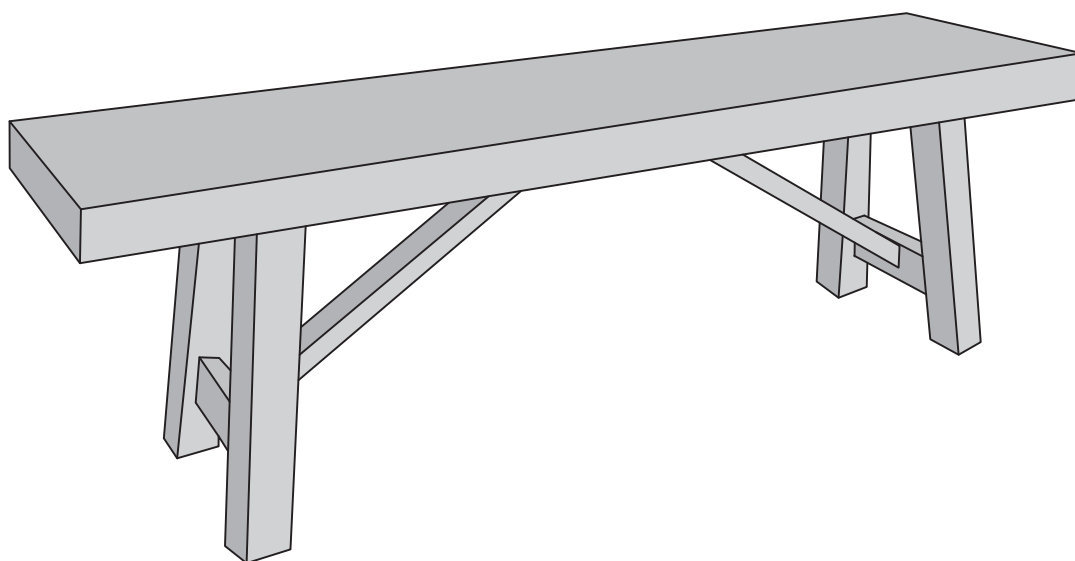


*Please visit our website for the most current instructions, assembly tips, report damage, or request parts. **www.walkeredison.com***


Revised 03/2017

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place . When first inserting dowels , locate the appropriate hole for the dowel , place a small amount of glue in the hole and insert the dowel . Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together , place a small amount of glue on the end of the dowel before attaching parts together . Wipe away excess glue immediately.








- VI. A Phillips head screwdriver is required for the assembly of this product .








- VII. Power tools should not be used to assemble this product .

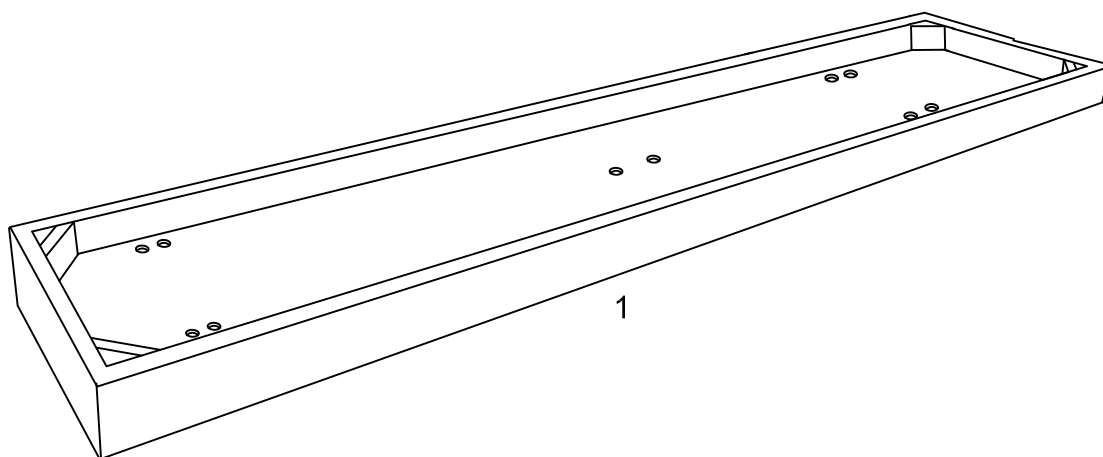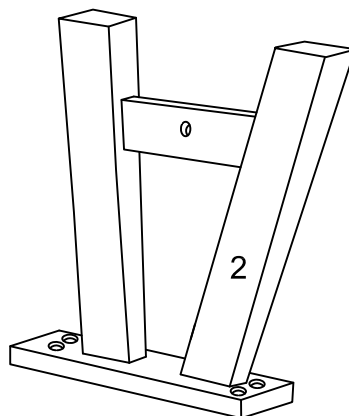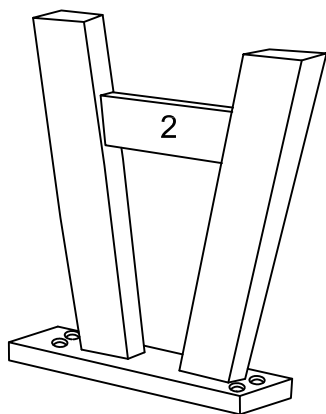


Parts List



Hardware List


| | | | | |
|---|---|-------|---------------|-------|
| A |  | M6*35 | Bolt | 8 pcs |
| B |  | M6*25 | Bolt | 4 pcs |
| C |  | 1/4" | Washer | 8 pcs |
| D |  | 1/4" | Spring washer | 8 pcs |
| E |  | M4 | Wrench | 1 pc |



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

Step 1

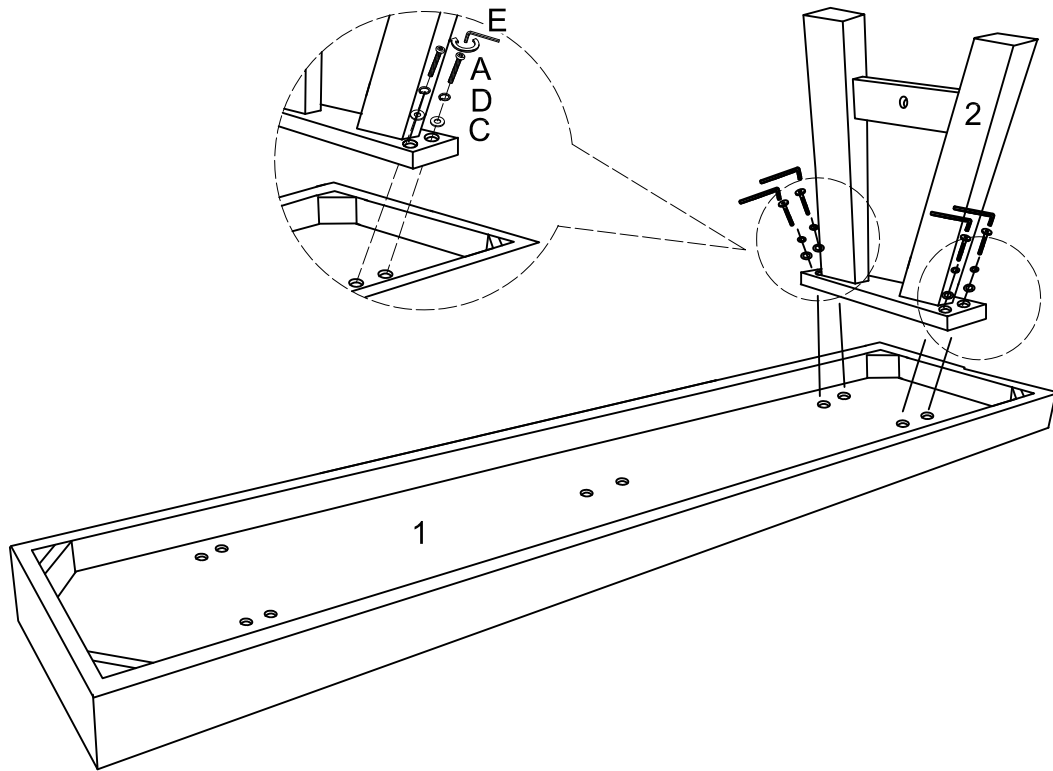


Attach right legs (2) to bench seat (1) using bolts (A) , spring washers (D), and washers (C). Tighten using wrench (E).

Step 2

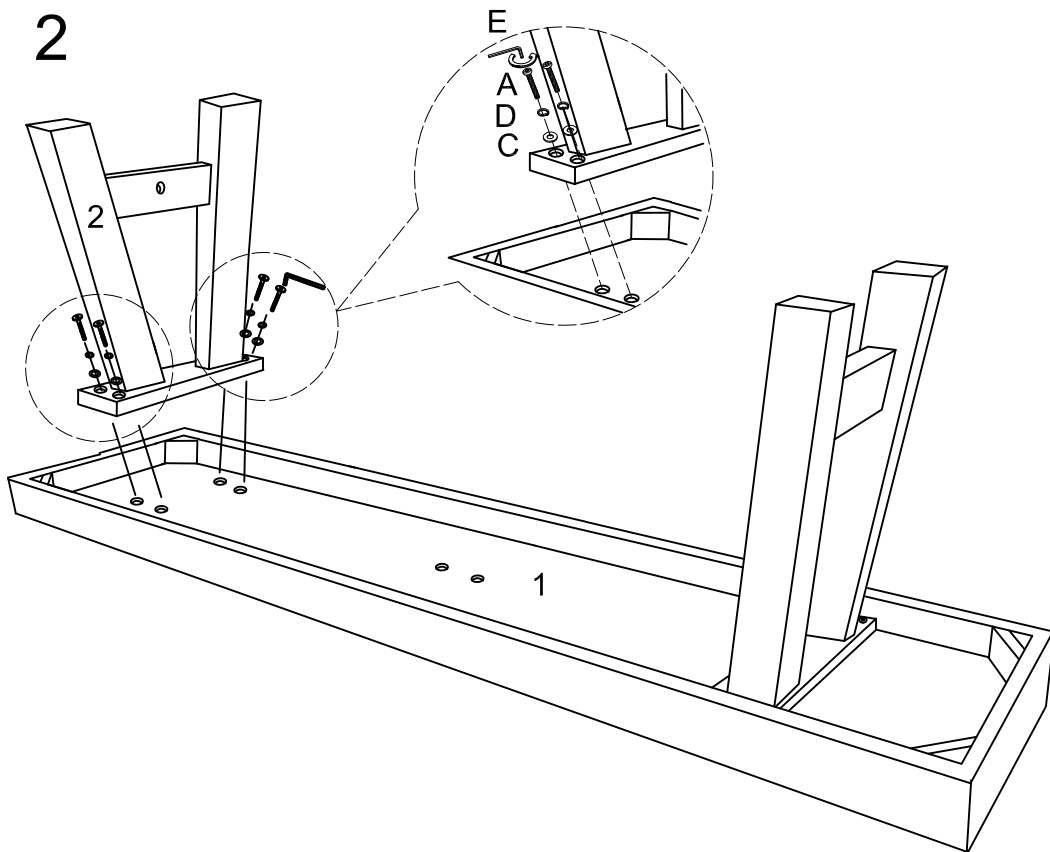


Attach left legs (2) to bench seat (1) using bolts (A) , spring washers (D), and washers (C). Tighten using wrench (E).

Step 3

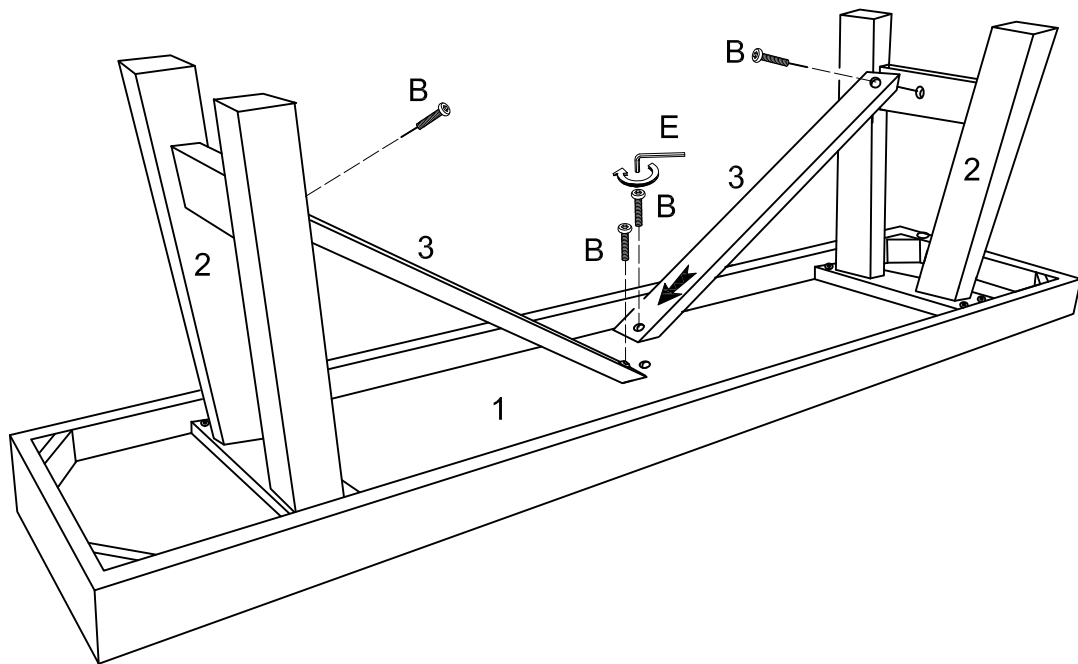

Attach support beams (3) to legs (2) using bolts (B). Secure support beams (3) to bench assembly using bolts (B) as shown in the diagram. Tighten bolts using wrench (E).

Step 4

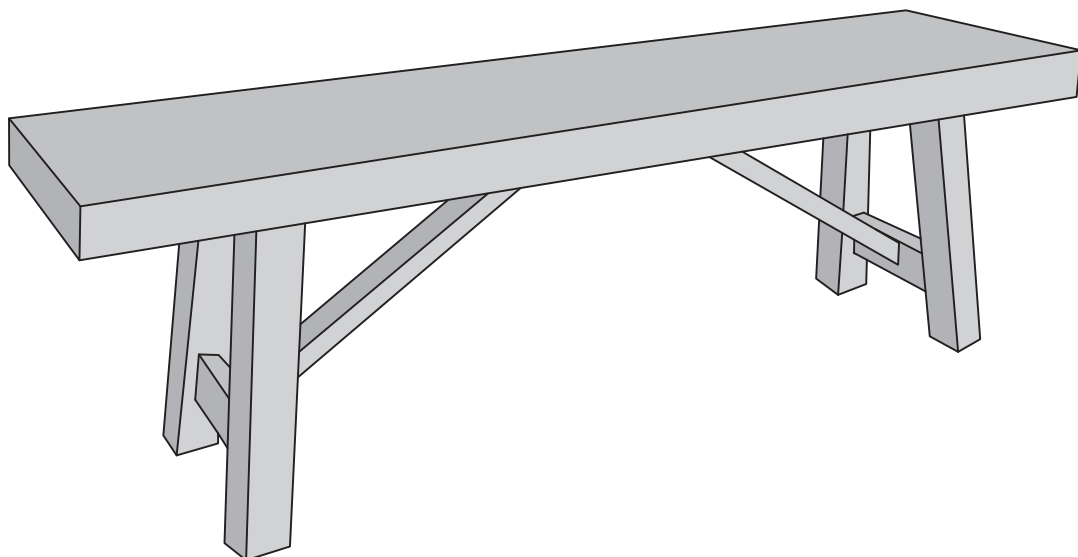

Final Assembly