

# MODEL: 324070RB PACKING DIAGRAM

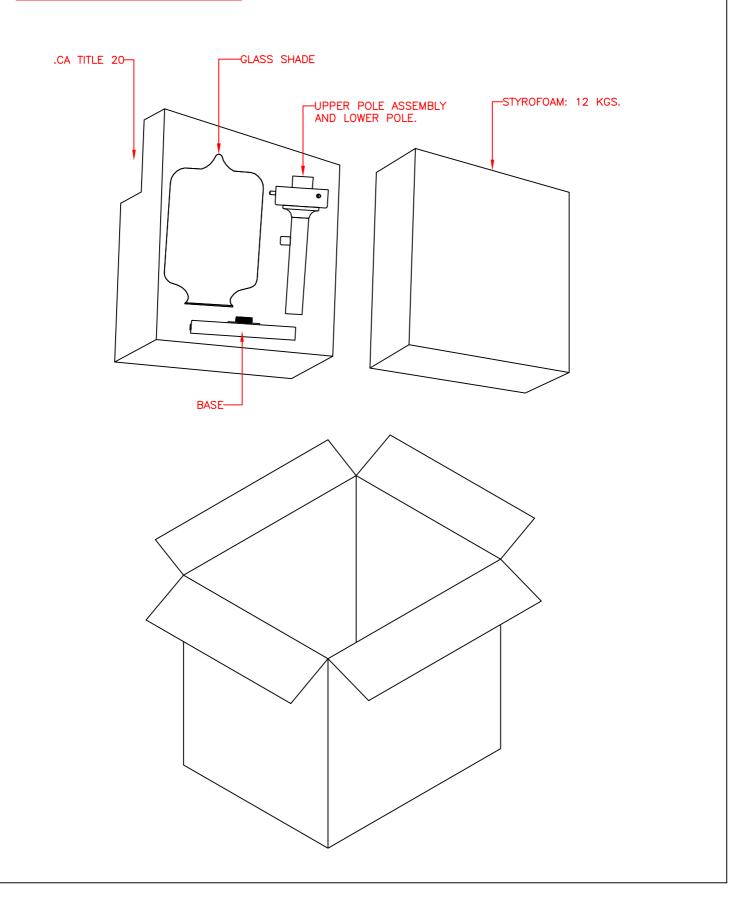

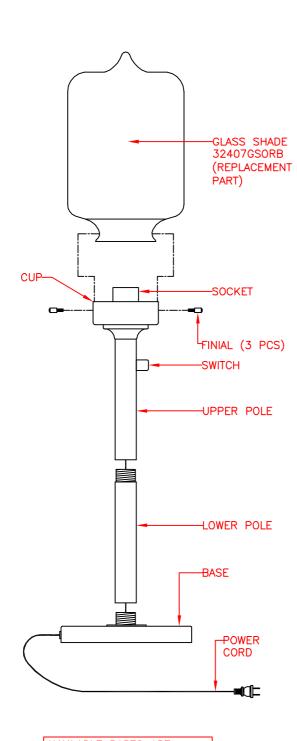

AVAILABLE PARTS ARE: 32407GSORB (GLASS SHADE)

## **ASSEMBLY INSTRUCTIONS**

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS LAMP SHOULD TAKE APPROXIMATELY 5 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

#### UNPACK THE LAMP

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS IN THE PACKAGE: GLASS SHADE, (3) FINIALS, UPPER POLE ASSEMBLY, LOWER POLE AND BASE. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

#### ASSEMBLE THE LAMP

- 1. CAREFULLY ORGANIZE AND PLACE ALL PARTS ON A SMOOTH, FLAT SURFACE. LINE UP ALL OF THE PARTS ACCORDING TO THE ASSEMBLY DIAGRAM.
- 2. SCREW LOWER POLE TO TOP OF THE BASE.
- 3. PULL THE EXCESS POWER CORD THROUGH THE BASE.
- 4. SCREW UPPER POLE ASSEMBLY TO TOP OF THE LOWER POLE.
- 5. INSTALL A 100 WATT MAXIMUM MEDIUM BASE TYPE "A" BULB (NOT INCLUDED) INTO SOCKET.
- 6. PLACE GLASS SHADE ONTO THE CUP AND SECURE WITH (3) FINIALS.
- 7. PLUG THE POWER CORD INTO AN OUTLET AND TURN ON AT SWITCH.

#### **BULB REPLACEMENT**

- 1. BEFORE REPLACING THE BULB, BE SURE THAT THE SHADE AND BULB ARE COOL AND LAMP IS UNPLUGGED.
- 2. DISASSEMBLE THE GLASS SHADE, UNSCREW EXISTING BULB FROM SOCKET AND REPLACE WITH A NEW BULB. REPLACE THE GLASS SHADE AND PLUG POWER SUPPLY CORD BACK INTO OUTLET.

#### TROUBLE SHOOTING

- 1. IF YOUR LAMP DOES NOT LIGHT, CHECK PLUG AT THE OUTLET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE POWER OUTLET.
- 2. IF LAMP STILL DOES NOT LIGHT, UNPLUG FROM OUTLET. CHECK THE BULB FOR A BROKEN FILAMENT. REPLACE BULB IF NECESSARY, PLUG IN LAMP AND TURN IT ON.
- 3. IF THE LAMP STILL DOES NOT LIGHT, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

### **IMPORTANT SAFETY INSTRUCTIONS**

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

