

Project:

Type:

Quantity:

Note:

SKU#: NAN - 48V - - - 30K - DB

Description

Nano vanity lights represent extraordinary value. The super-efficient LED light source inside the minimal geometric form illuminates the white frosted acrylic diffuser.

Features

- Stamped steel construction
- Frosted acrylic extruded diffuser
- Rear-mounted driver fits inside standard 4" junction box
- Damp location rated
- JA8-2016 listed



**QUICK
SHIP** | AVAILABLE
IN 2 WEEKS

Deep Backplate
Polished Chrome or Satin Silver
12T Triac
Option Only



Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 39W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 2932 Lm (measured at 3000K)
- Fixture Weight: 8.15lb (3.7kg)
- Backplate: 4.6" x 10.75" x 1.0"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Upgradable to 120-277V input driver with Universal Dimming
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Standard Finishes: PC - Polished Chrome, SN - Satin Nickel
- Special Order Paint Finishes: BL - Matte Black, BZ - Bronze, SG - Satin Gold, or Satin Silver

Dimensions

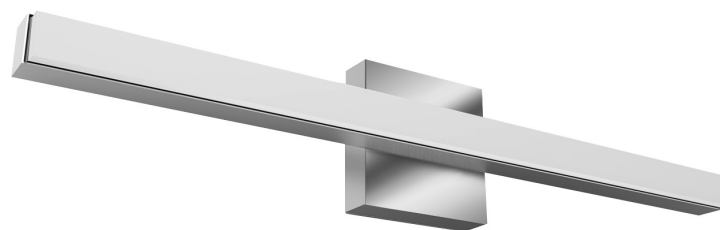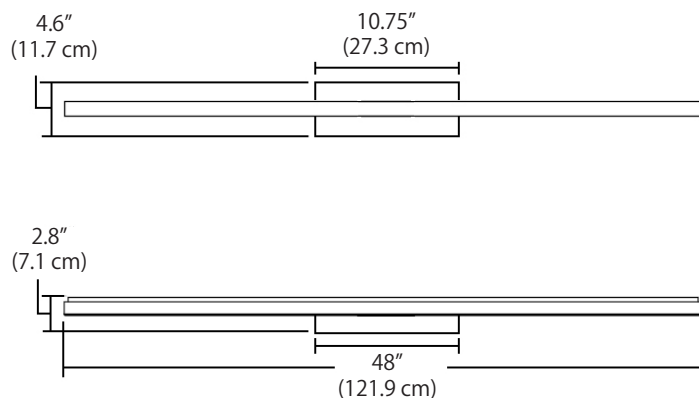

NAN-48V-PC-12T-30K-SO-DB

ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
NAN	48V			30K	
NAN Nano	48V 48" Vanity	Standard PC Polished Chrome SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold	12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (12T Standard)	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	DB Deep Backplate (Standard) (Driver located in backplate)

Example: NAN-48V-PC-12T-30K-DB

Finish



PC SN BL BZ SG SS

Standard Finishes



PC
Polished Chrome



SN
Satin Nickel



BL
Black



BZ
Bronze




SG
Satin Gold



SS
Satin Silver

Special Order Powder Coat Finishes

Volts/Dimming



12T 24U

12T Input: 120V, Dimming: TRIAC (Standard)

27U Input: 120–277V, Dimming: TRIAC / ELV / 0–10V (Special Order)

Color Temperature



27K 30K 35K 40K




27K 2700K

30K 3000K (Standard)

35K 3500K

40K 4000K

Front Plate

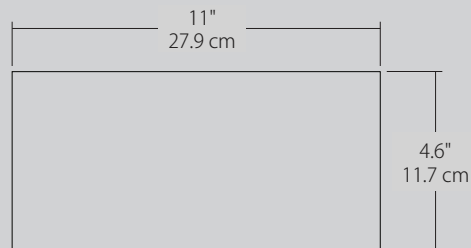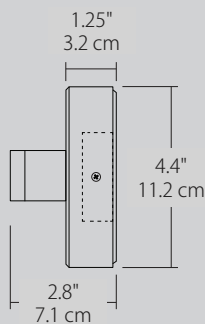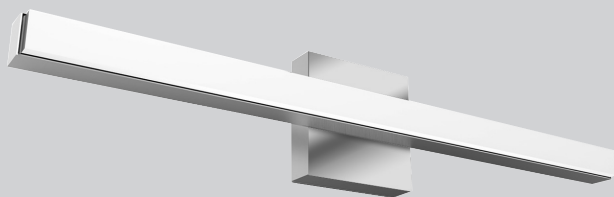

DB - Deep Backplate (Standard)

10.75" H, 4.4" W, 1" D

Driver located inside backplate