297lm

9.6W

3000K

>80

30.9lm/W

8W Array*

50000Hrs

120-240V

Plug-In

• Interchangeable plug options accommodate most electrical outlets for global diversity

DIMMABLE (On Cord)

TOL0081



Design By

Michele De Lucchi Giancarlo Fassina

Collection =

Design







Colors & Finishes =



Materials •

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- Base in weighted steel with stamped aluminum cover

Features & Accessories =

Specifications =

Delivered lumens

Light output ratio

Life expectancy

Control type

Input Voltage

Driver

Led type


Power consumption

CCT (Correlated Color Temperature)

CRI (Color Rendering Index)

- Fully adjustable, articulated arm structure
- Tiltable and rotatable diffuser (90 degrees in both directions)

Dimensions =

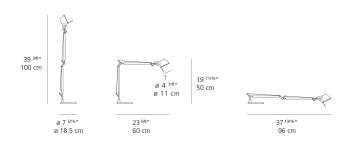

Packaging •


2 Boxes

1 x 8-3/8" x 8-3/8" x 25-5/16" / 2.45 lbs - 21 cm x 21 cm x 64 cm / 1.11 kg

1 x 11-7/8" x 3-13/16" x 11-7/8" / 7.39 lbs - 30 cm x 9.5 cm x 30 cm / 3.35 kg

Light distribution

Direct



Luminaire weight 8.2 lbs / 3.72 kg

Warranty =

5 year limited warranty

Red = Max Cd. Through Vertical plane Blue = Max Cd. Through Horizontal plane