



ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0571

WARNING: Turn off the main power at circuit breaker before installing fixture.
AVERTISSEMENT: Coupez la source d'alimentation principale au panneau central de disjoncteurs avant d'installer le luminaire.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

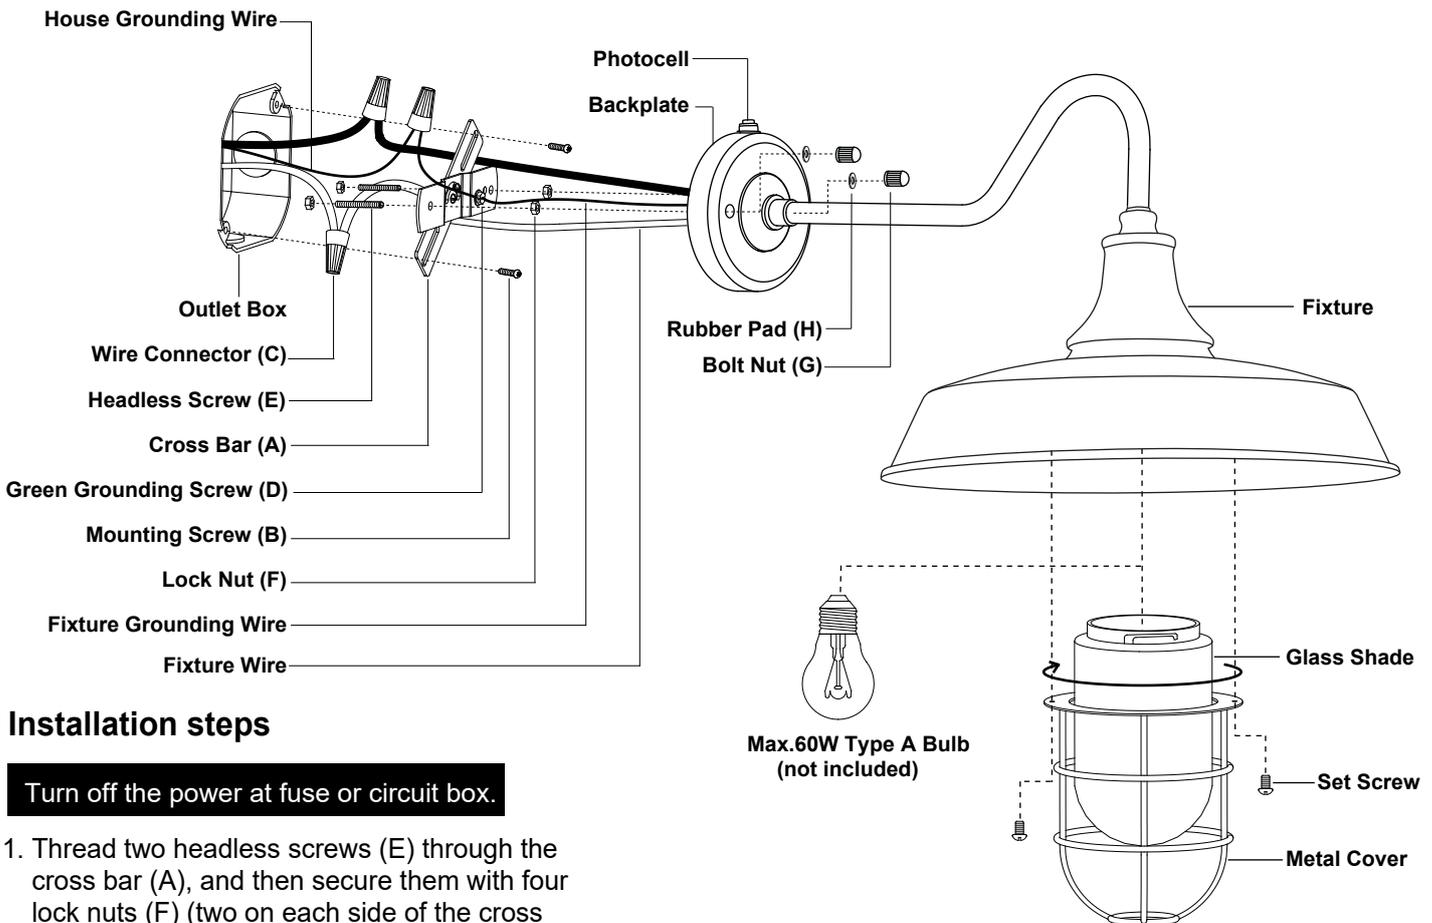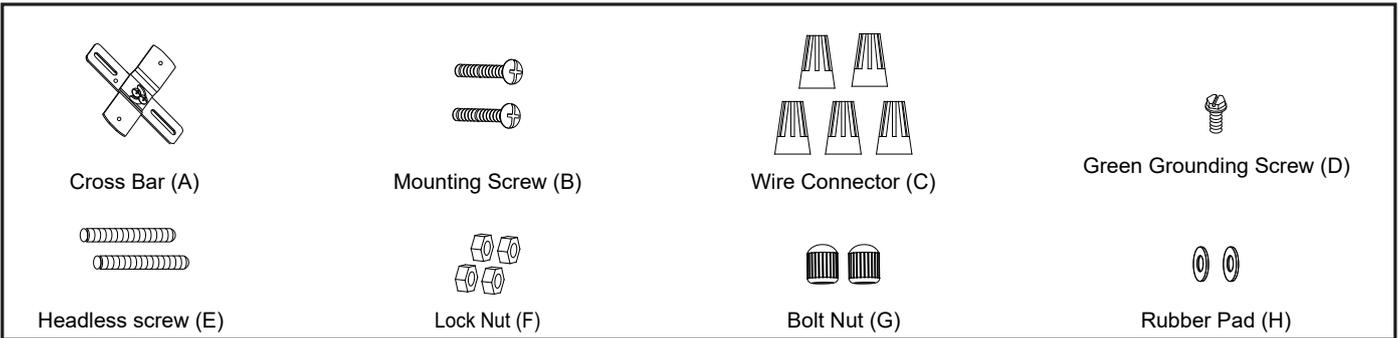

Installation steps

Turn off the power at fuse or circuit box.

1. Thread two headless screws (E) through the cross bar (A), and then secure them with four lock nuts (F) (two on each side of the cross bar (A).) Adjust the length of the headless screws (E) if necessary.

Note: Make sure the headless screws are lined up horizontally to make the fixture level.

2. Attach the cross bar (A) to the outlet box by using two mounting screws (B).

3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the cross bar (A) with the green grounding screw (D). Then, depending on local code connect it to the house grounding wire with the wire connector (C).

Carefully put all of the wires back into the outlet box.

4. Attach the backplate of the fixture to the cross bar (A) by aligning and inserting the two headless screws (E) from the cross bar (A) into the open holes on the backplate, then place the two rubber pads (H) over the exposed headless screws (E) before screwing the two bolt nuts (G).

Note: With silicone caulking compound, caulk completely around where the backplate meets with the wall surface to prevent water from seeping into the outlet box.



5. Install bulb (not included).

Check relamping label at socket area or packaging for maximum wattage allowed .

6. Place the glass shade on the fixture carefully and rotate the glass shade to hold it in place, then attach the metal cover to the fixture by using the two set screws.

Turn on the power at fuse or circuit box.

Operation the Unit Without Photocell

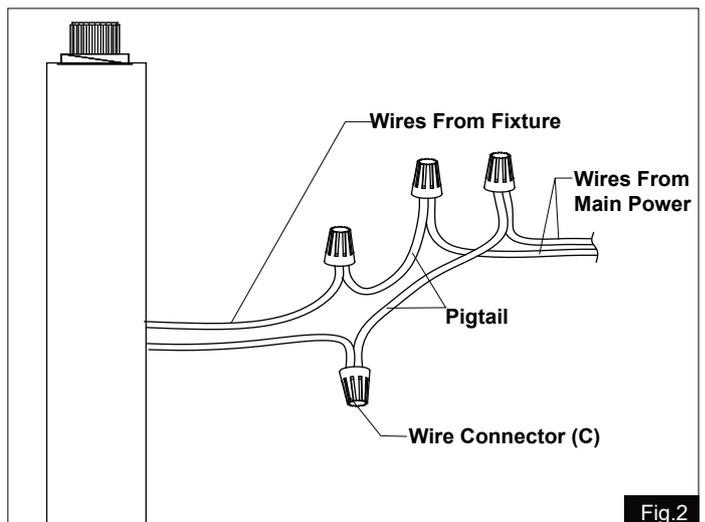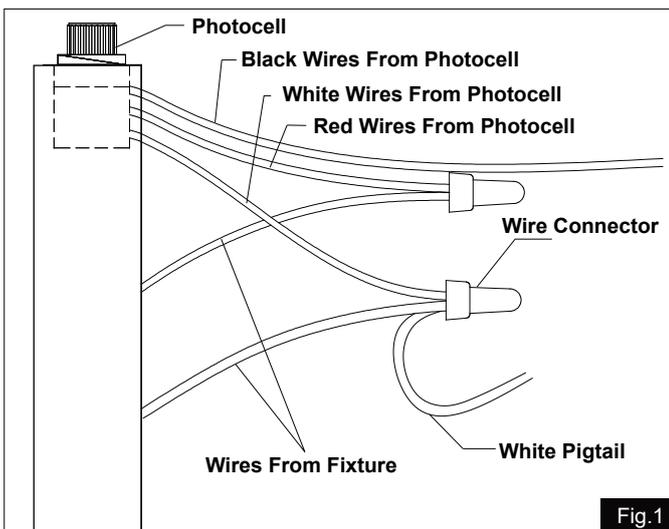

1. Turn off the power at the fuse or circuit box before starting installation.
2. Loosen the wire connectors connected with the wires from photocell. (See Fig.1)

Note: Do not move the photocell to prevent water from seeping into the outlet box.
3. Take a white pigtail and black pigtail and make wire connections using wire connectors (C): (See Fig.2)
 - a. The black wire from the fixture to one end of the black pigtail.
 - b. The white wire from the fixture to one end of the white pigtail.
 - c. The other end of the black pigtail to the black wire from the power source.
 - d. The other end of the white pigtail to the white wire from the power source.
 Put all wires back into the backplate of the fixture.



Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

Cross Bar (A)	Mounting Screw (B)	Wire Connector (C)	Green Grounding Screw (D)		
Headless screw (E)	Lock Nut (F)	Bolt Nut (G)	Rubber Pad (H)		

↑ Mounting Hardware 6200MM (1SET)

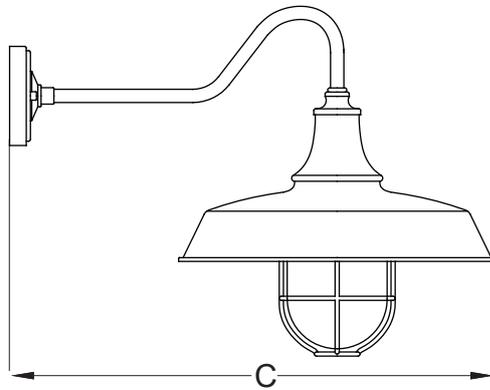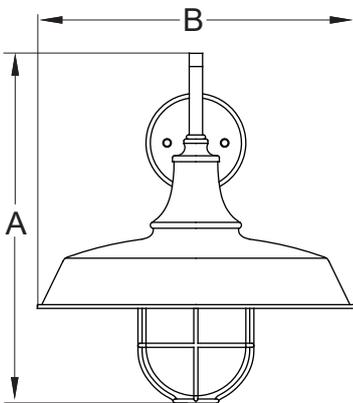

A: 16-3/4"

B: 15"

C: 23"