



Features

- For use with K-99509 Jacquard®, K-99522 Damask®, and K-99535 Poplin® vanities.
- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Includes 4 electrical outlets (2 switched, 2 always live).
- Appliances can remain plugged in while vanity door is closed.

Material

Solid wood and veneers.



Codes/Standards EPA TSCA Title VI CARB P2

KOHLER® One-Year Limited Warranty See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

1WR Oxford Maple





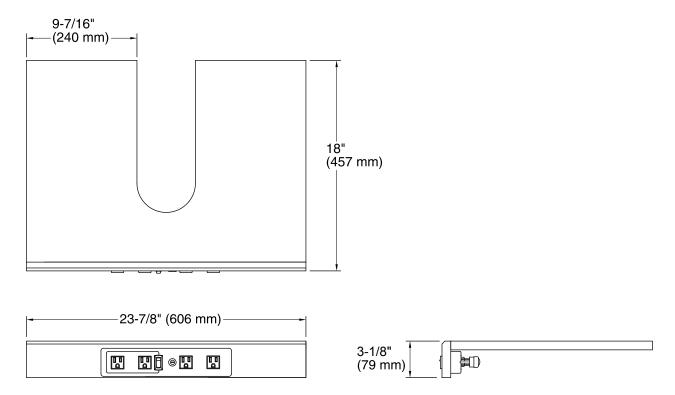

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

Install a Ground-Fault Circuit-Interrupter (GFCI) outlet prior to installing the vanity.

