



Revel®

Frameless Sliding Bath Door

K-707000-D3

Technology

- Frameless, 1/4-inch-thick tempered Frosted glass.
- Center-guided door system for smooth, quiet sliding action.
- Frameless design with minimal metal allows for greater ease of cleaning.
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space.
- Low bottom track creates easy entry and exit to the bathing space.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for simpler installation.

Installation

- Sliding bath door.
- Not for use in hospitality.

Included Components

Additional Components:
Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

SHP


ABZ

BNK

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

D3 Frosted

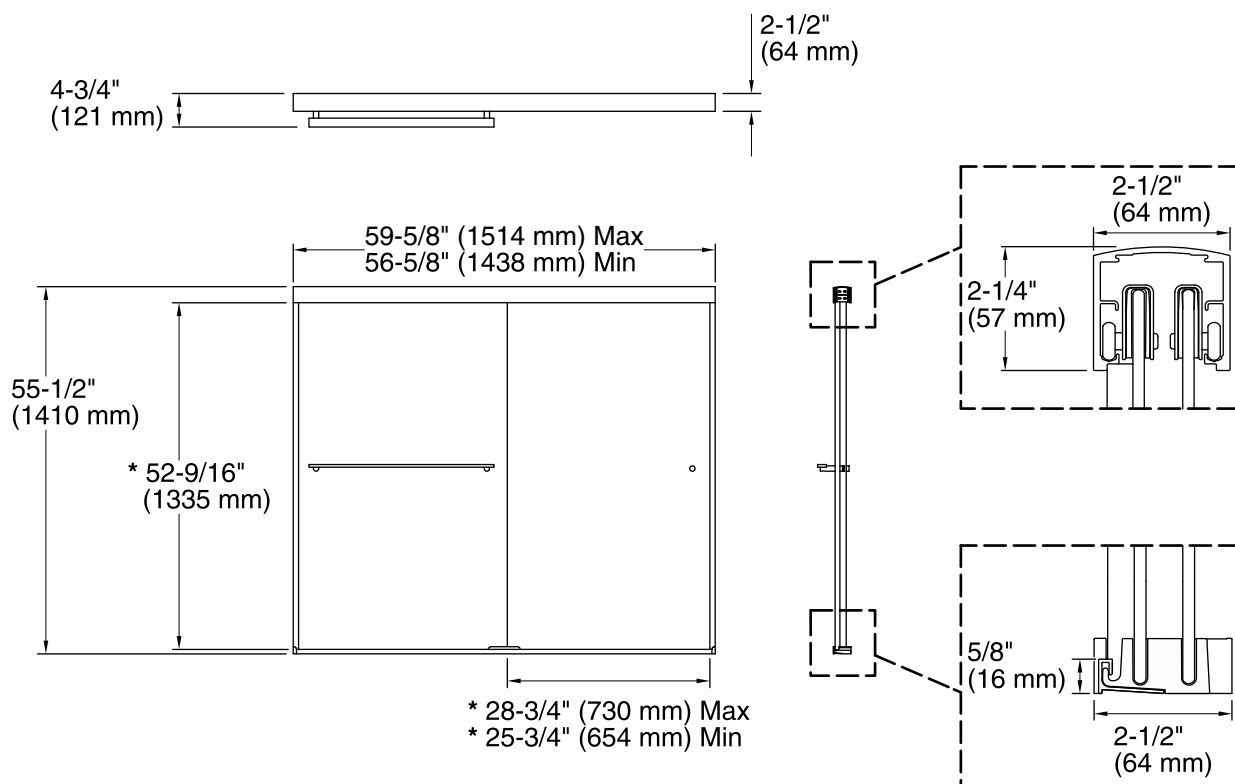

* Walk-Through

Technical Information

All product dimensions are nominal.

| | |
|----------------------|-----------------------|
| Installation type: | For bath installation |
| Opening style: | Sliding/Bypass |
| Opening Width - Min: | 56-5/8" (1438 mm) |
| Opening Width - Max: | 59-5/8" (1514 mm) |
| Walk-through - Min: | 25-3/4" (654 mm) |
| Walk-through - Max: | 28-3/4" (730 mm) |
| Glass thickness: | 1/4" (6 mm) |
| Glass coating: | CleanCoat® |

Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installing the top track over the wall jambs.