

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 2688 2689

## For Ceiling Mount Light Fixture


**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the pipe screw part way into the center hole of the single bar and secure with hex nut.
4. Attach the single bar to the junction box using two box screws. The side of the single bar marked "GND" must face out. The junction box is not included.
5. While holding the ceiling pan(A) towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the single bar with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
6. Attach the ceiling pan (A) onto the junction box, aligning pipe screws of the single bar with mounting holes in ceiling pan and lock it securely with the ball nut(B).
7. Install the light bulbs in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**
8. Raise the glass shade(C) to the ceiling pan(A), then fasten the glass shade, aligning the screw hole of ceiling pan with the glass shade hole, lock it securely with the ball nut(D).


**Your installation is now complete. Return power to the junction box and test the fixture.**

Fig.1

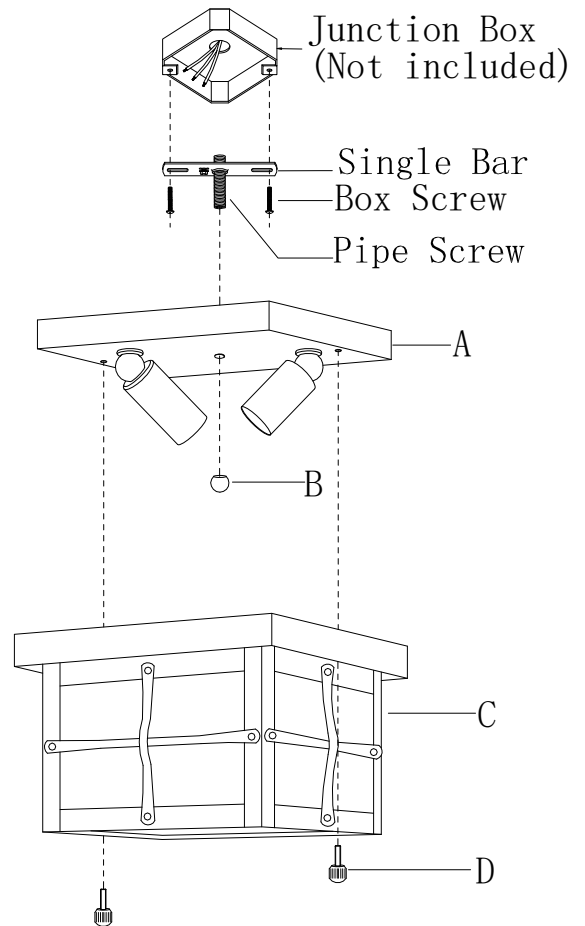

MIN 90°C SUPPLY CONDUCTORS

Fig.2

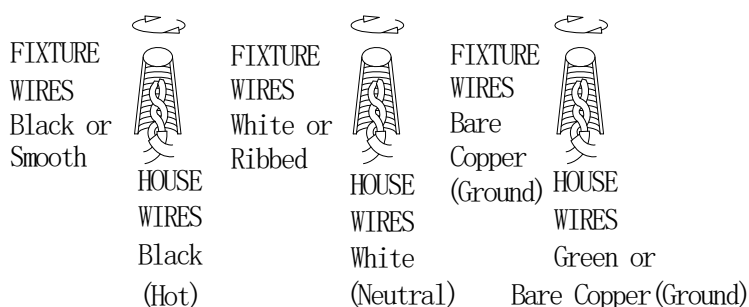

**LIVEX**  
LIGHTING  
EST. 1993

DOC20141202688