

FREE STANDING FAUCET INSTALLATION INSTRUCTION

DESCRIPTION

- Brass construction
- Includes Red/Blue indicators

FLOW

- Showerhand is limited to 2.5gpm (9.5L/min) at 80psi.
- Bathtub spout is minimum to 2.4gpm (9.0L/min) at 20psi

CARTRIDGE



- Ceramic disk cartridge

STANDARDS


- Certified to CU PC

WARRANTY


- 2 Year warranty against leaks, drips and finish defects to the original consumer purchaser.
- Cartridge not included in warranty.

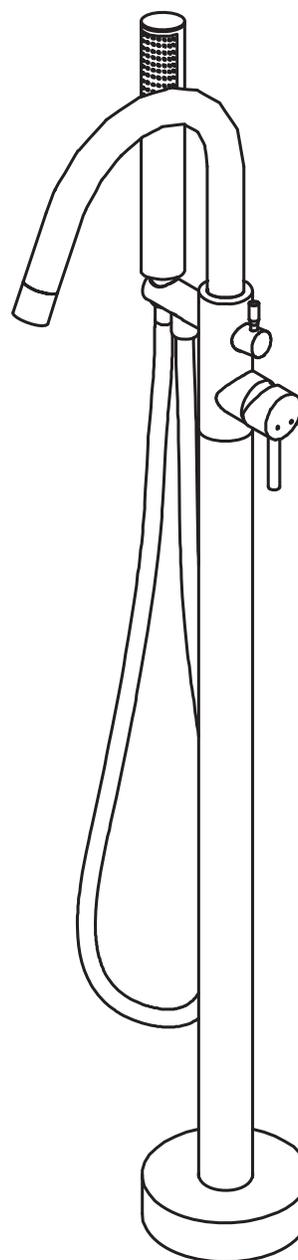

SPECIFICATIONS

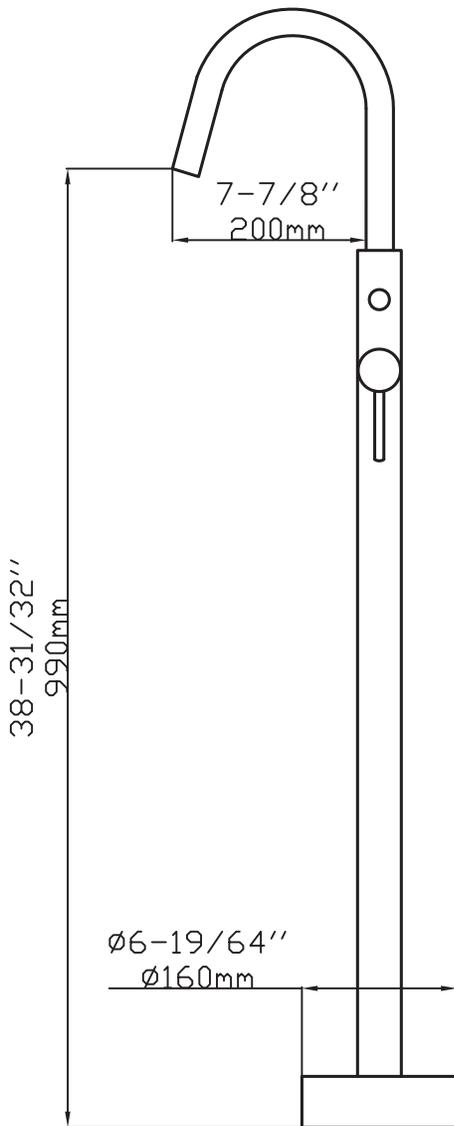

Side View

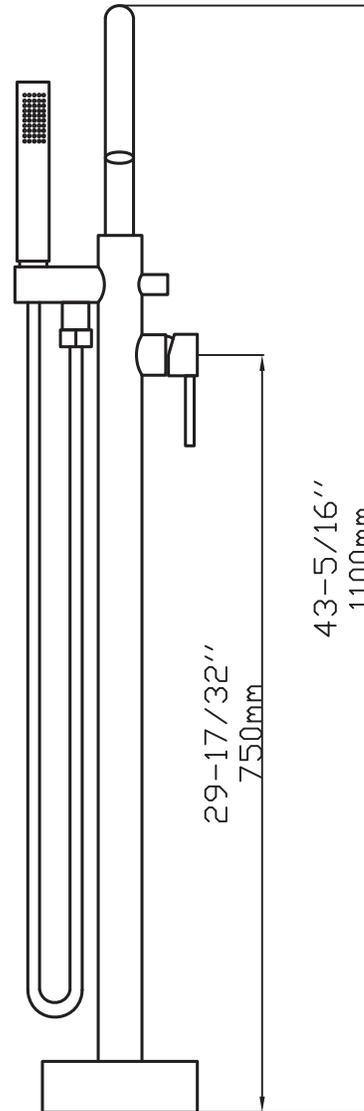

Front View


FREE STANDING FAUCET INSTALLATION INSTRUCTION



READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT

INSTALLATION MANUAL

Tools You Will Need ·

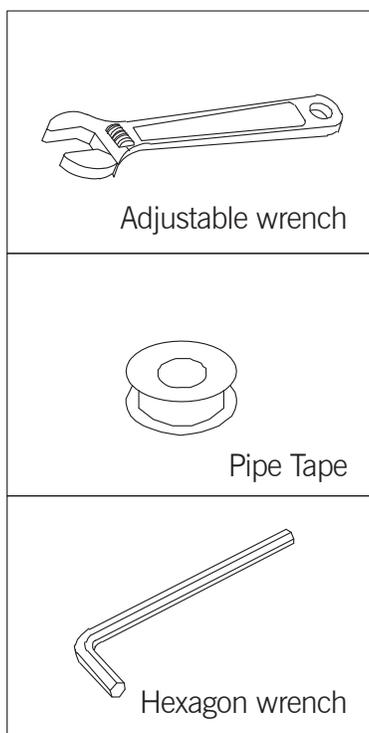


PLEASE NOTE BEFORE INSTALLATION

1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (Includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.

DAILY MAINTENANCE

1. Use a soft cloth and vinegar to remove hard-water spots.
2. Check aerator (if present) regularly for calcium build up are when water stream is not optimum.
3. DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
4. Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
5. If the water pressure appears to be less than optimum remove, inspect, clean or replace aerator.


FREE STANDING FAUCET INSTALLATION INSTRUCTION

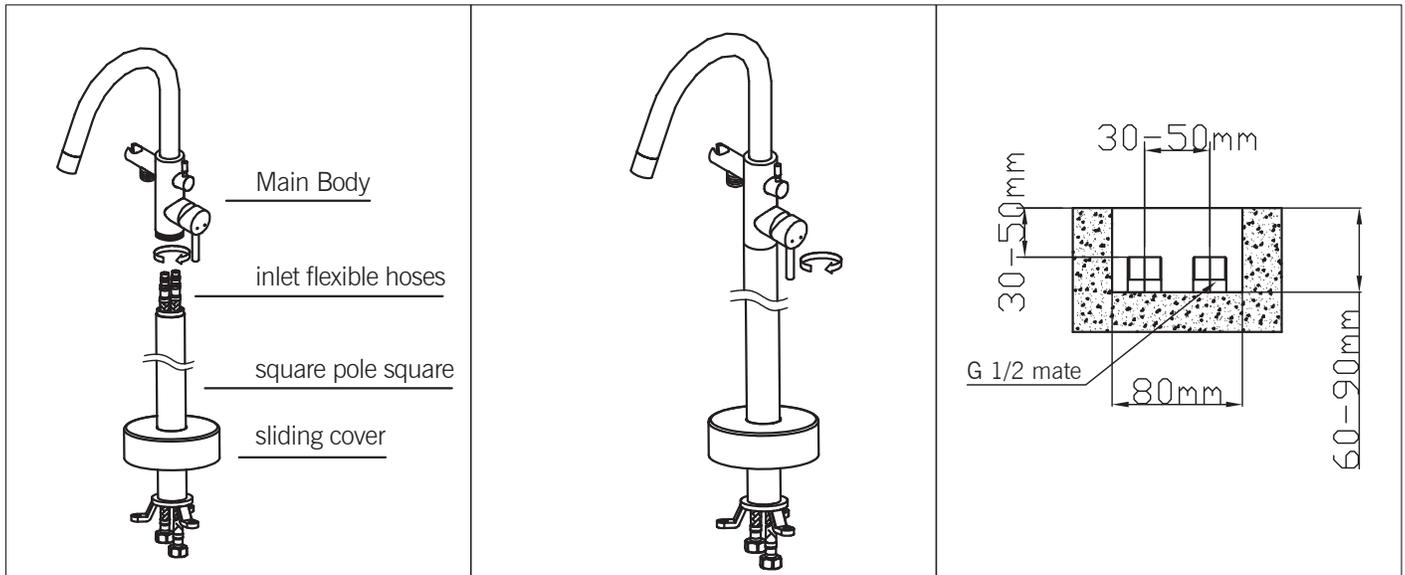

1. Insert the flexible hoses through the square pole and assemble them to the main body by turning by hand.

2. Match the square pole with the main body, fix together by turning the 2 screws on the rear with the key.

3. Create a chamber in the floor following the above measurements with G 1/2 male connectors for the water net.

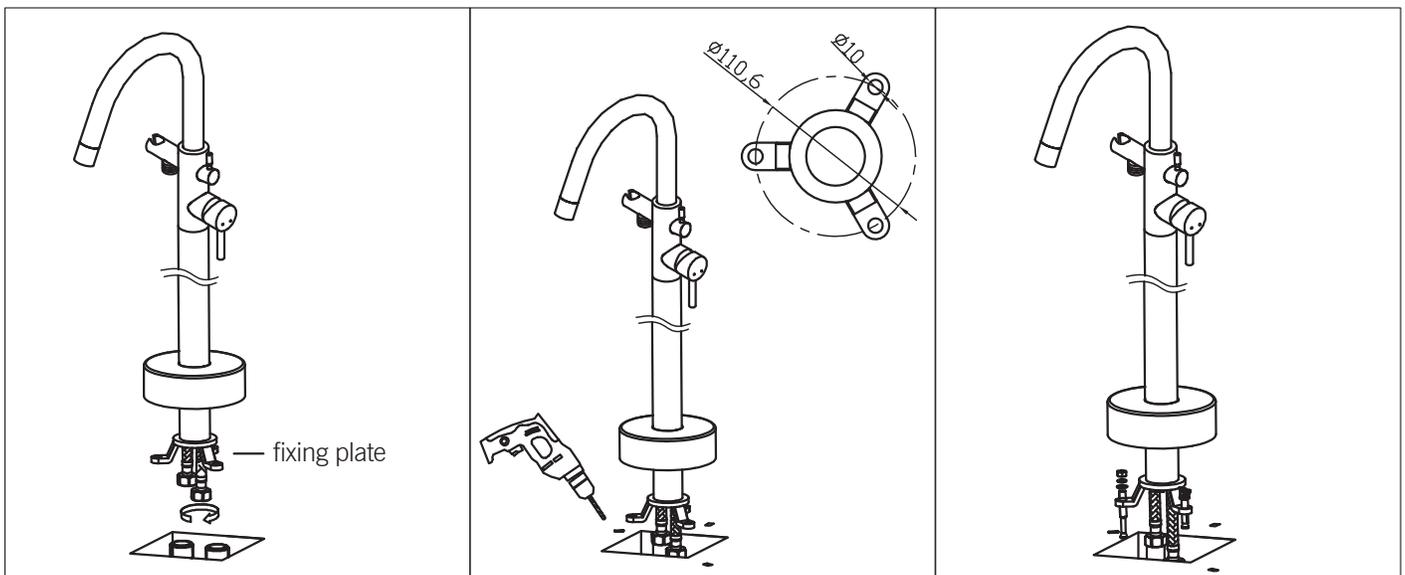

4. Insert the sliding cover on the square pole, insert the flexible hose's nuts through the fixing base and connect the G 1/2 nuts with the water net connectors, fixing tight by key.

5. Adjust the complete to get the correct position, then drill to fix the base plate.

6. Insert the fixing bolts and fix tight in the floor. Move the cover to hide the base.