

# ASSEMBLY INSTRUCTIONS

(For LD1238L-42)


## ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

## Assembly step:

1. Turn the table top(A) upside down on the soft clean surface.
2. Loosely attach the legs(C) to the table top with bolts(D), big flat washers(E), big lock washers(F), nuts(G) and nut caps(H).
3. Loosely attach each of the center plate(B) to the legs. Note that the recessed end of each plate goes on the leg last at each corner. Secure using small flat washers(J), small lock washers(K), small bolts(I) and PVC covers(L).
4. Tighten all the bolts and nuts completely. DO NOT overtighten.
5. Turn the table onto its legs and use the adjuster feet to level the tables.

Warning : DO NOT use acid or alkaline washing liquid to clean the product.

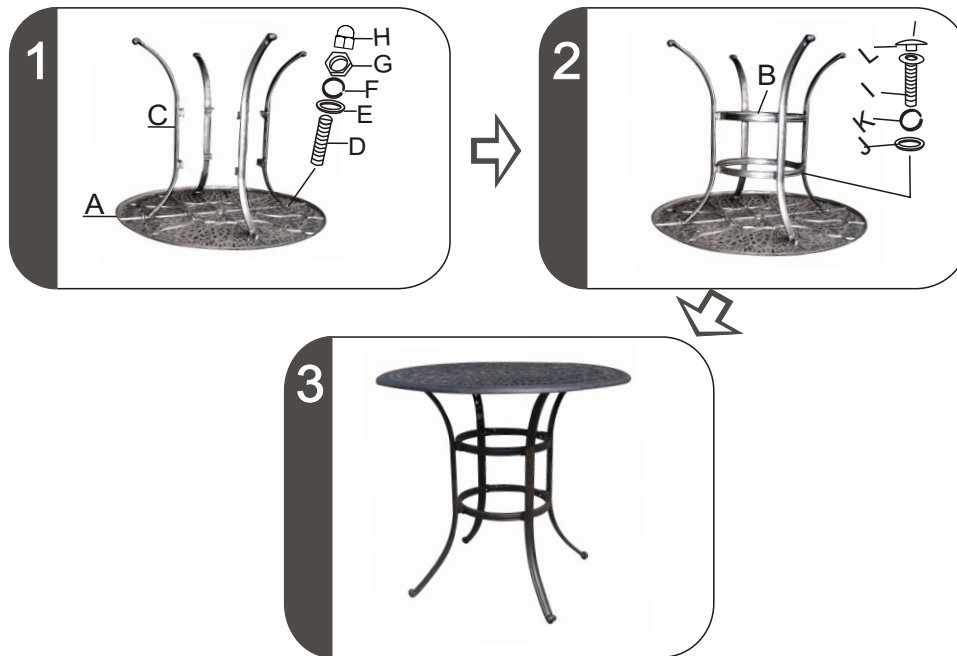

Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Table top	1	D	(M8*30)	Bolt	4
B		Center plate	2	E	(M8)	Big flat washer	4
C		Table leg	4	F	(M8)	Big lock washer	4
N		Wrench	1	G		Nut	4
O		Adjustable Foot	Factory already assembled	H		Nut cap	4
P		Umbrella ring	1	I	(M6*35)	Bolt	8
				J	(M6)	Small flat washer	8
				K	(M6)	Small lock washer	8
				L		PVC cover	8
				M		Wrench	1

**\* DO NOT OVER TIGHTEN**

Made in China











**\* NO POWER TOOLS**

**\* NO SOCKET DRIVERS**



# ASSEMBLY INSTRUCTIONS

(For LD777-7)

Parts List			
Pieces	Schema	Description	QTY
A	 (M8*45)	Screw	4
B	 (M8)	Flat washer	8
C	 (M8)	Lock washer	4
D	 (M8)	Nut	4
E		Nut cap	4
G		Wrench	1
H		FOOT LEVELER	Factory already assembled
I		Seat	1
J		Base	1
K		Seat Cushion	1



## WARNING!

○ This chair has a 250 lbs weight capacity.

○ Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

## ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.



H : This part have been assembled by factory already.

1. Place the base on a flat, solid surface. Loosely attach the seat to the base. Please using screws(A), flat washers(B), lock washers(C), nuts(D) and nut caps(E).
2. Tighten all the bolts and nuts completely. Use the adjuster feet to level the legs.
3. Put Cushion(K) on the unit(as shown in the picture).

**Warning** : DO NOT use acid or alkaline washing liquid to clean the product.



**\* DO NOT OVER TIGHTEN**

**\* NO SOCKET DRIVERS**



Made in China

**\* NO POWER TOOLS**

