KOHLER®

Features

- Frameless, 1/4-inch-thick Frosted tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides quiet sliding action.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat™ glass treatment repels water for improved ease of cleaning.

Installation

- Sliding shower door.
- Not for use in hospitality.

Included Components

Additional Components:
   Hardware kit

Codes/Standards

CPSC 16CFR 1201
ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

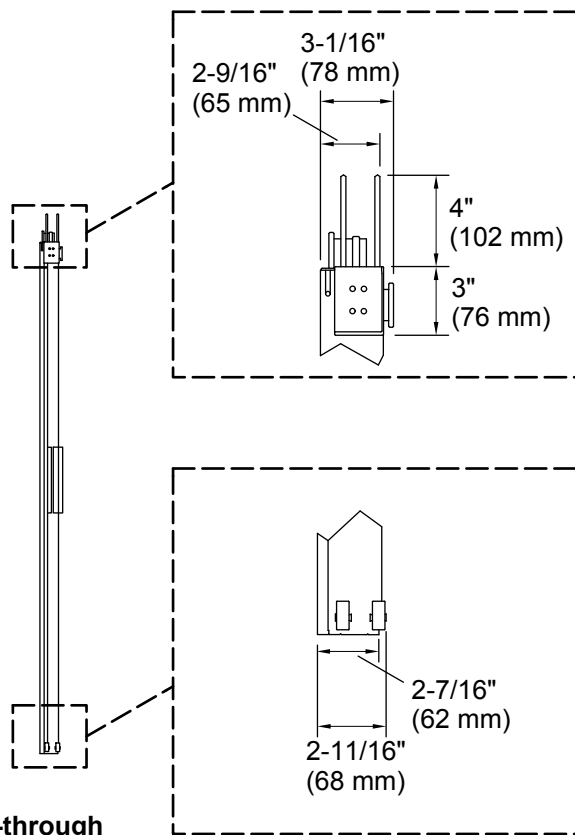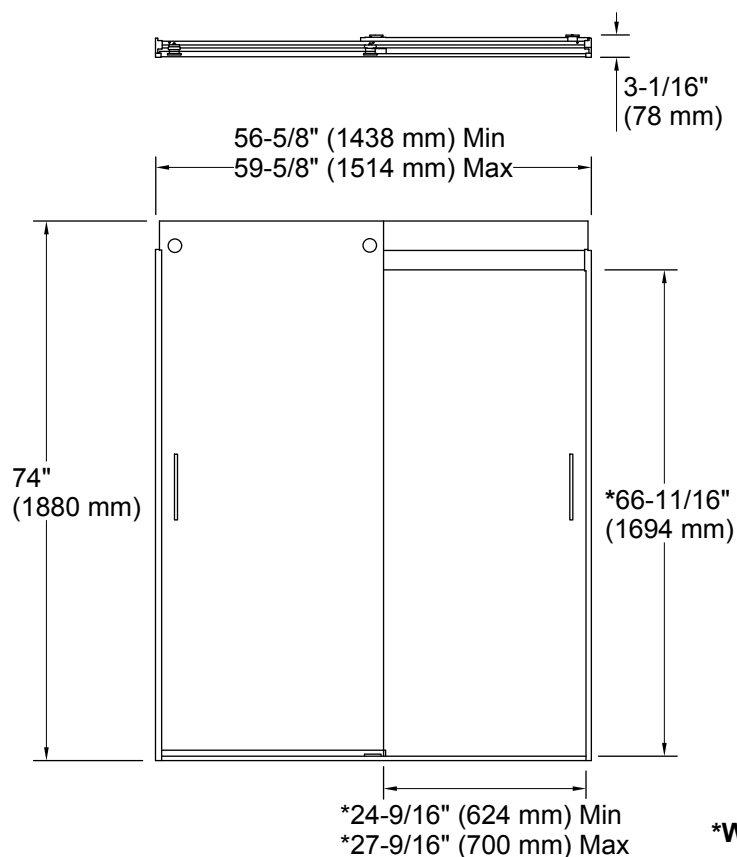*Color tiles intended for reference only.*

Color	Code	Description
	SH	
	MX	
	ABV	
	ABZ	

THE BOLD LOOK OF **KOHLER®**

3-1/16"
(78 mm)

56-5/8" (1438 mm) Min
59-5/8" (1514 mm) Max

74"
(1880 mm)

*66-11/16"
(1694 mm)

*24-9/16" (624 mm) Min
*27-9/16" (700 mm) Max

3-1/16"
(78 mm)

2-9/16"
(65 mm)

4"
(102 mm)

3"
(76 mm)

2-7/16"
(62 mm)

2-11/16"
(68 mm)

*Walk-through

Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-9/16" (624 mm)
Walk-through - Max:	27-9/16" (700 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
3-24-2019 02:46 - US/CA/MX

THE BOLD LOOK
OF KOHLER®