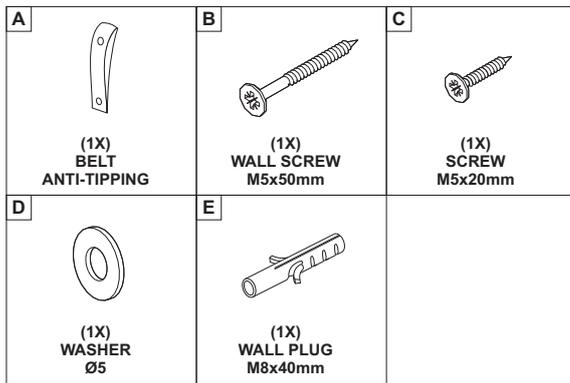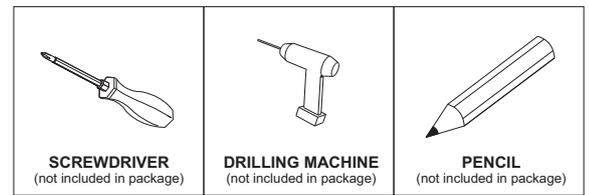# Ethnicraft

ASSEMBLY INSTRUCTION FOR ANTI-TIPPING INSTALLATION

HARDWARE ENCLOSED
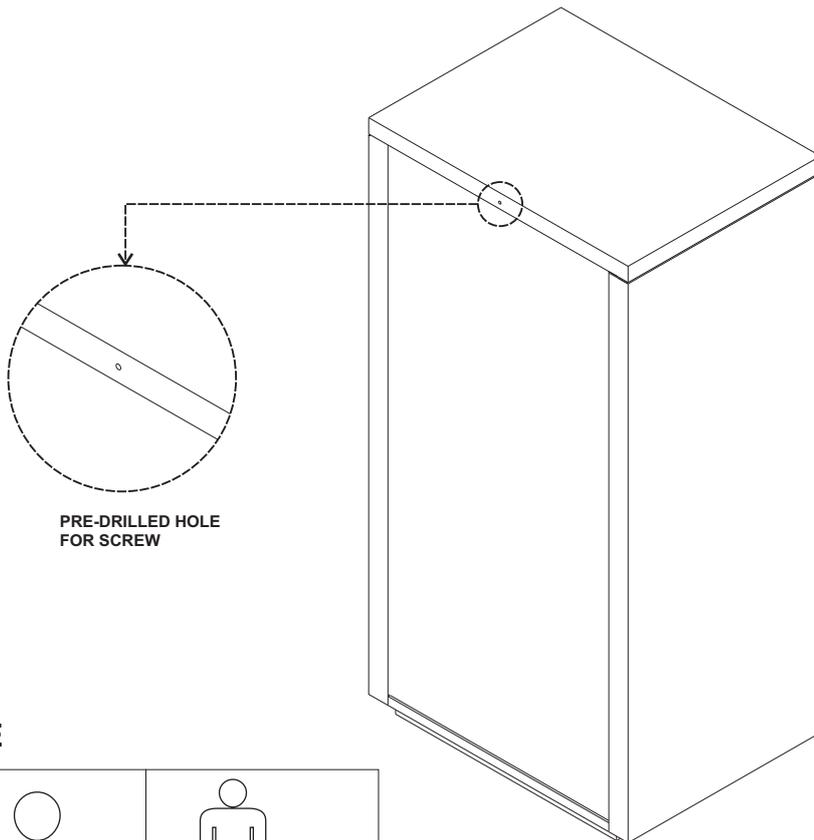
A	B	C
(1X) BELT ANTI-TIPPING	(1X) WALL SCREW M5x50mm	(1X) SCREW M5x20mm

D	E
(1X) WASHER Ø5	(1X) WALL PLUG M8x40mm

TOOLS

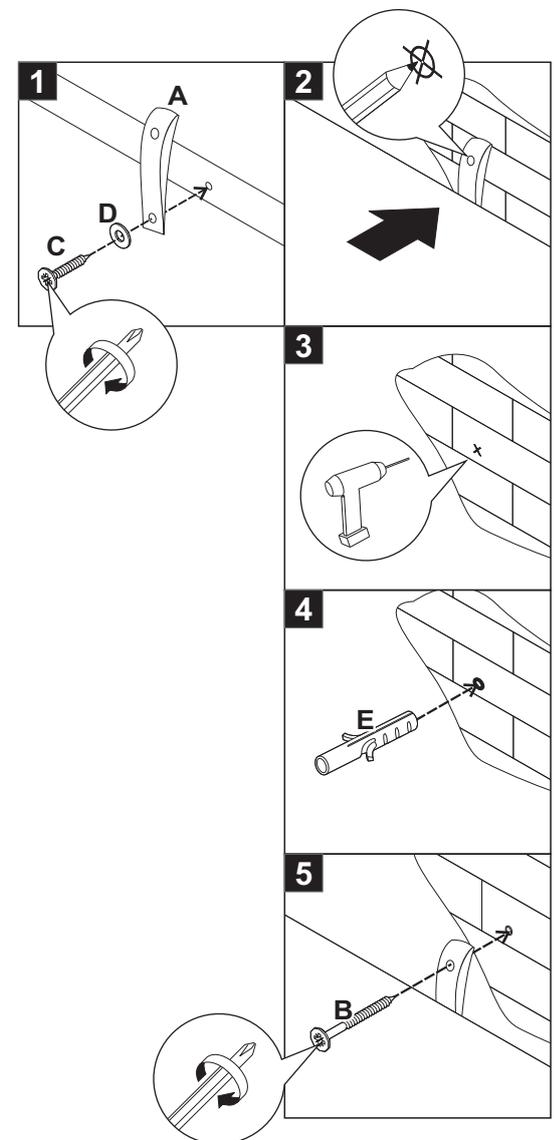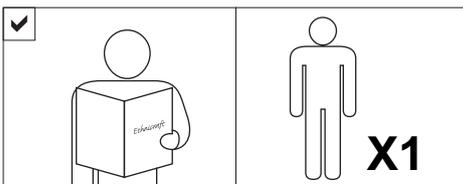|		
SCREWDRIVER (not included in package)	DRILLING MACHINE (not included in package)	PENCIL (not included in package)

INSTALLING ANTI-TIPPING SYSTEM

AS WALL MATERIALS VARY, THE SCREW INCLUDED ARE FOR BRICK WALL. FOR ADVICE ON SUITABLE SCREW SYSTEMS, CONTACT YOUR LOCAL SPECIALISED DEALER.

PRE-DRILLED HOLE FOR SCREW

NOTICE

X1

INSTRUCTION

1. Install anti-tipping belt (A), washer (D) with M5x20mm screw (C) into the pre-drilled hole on the top back frame of the cabinet.
2. Using a 1/4" diameter drill bit, drill the wall at the same level as the anti-tipping belt (A) on the cabinet. Install the wall plug (E) into the hole.
3. Connect the anti-tipping belt (A) with wall screw (B) into the wall plug (E).