

# SPECIFICATION SHEET

## BPL - 302


• Area Lights

• Aluminum

### Fixture Specifications:

- Housing:** Die-cast aluminum.
- Stem:** Die-cast aluminum stem, with ½ NPT hub on bottom.
- Finish:** Polyester UV powder coated, available in **BLK- Black, RST-Rust**
- Socket:** G4 Bi-Pin socket
- Lamp:** 12V, JC Bi-Pin bulb 20W standard, 50W Max. LED lamps available in 3W, with 2700K-warm white color temperature.

- Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord. Silicone filled wire nut BPL-80 available from BestProLighting.com Wire nuts sold separately.
- Mounting Spike:** Black 8½" ABS spike with ½" NPT male hub on top
- Electrical Notes:** A 12V transformer is required. Options are available from BestProLighting.com Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.
- Warranty:** Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

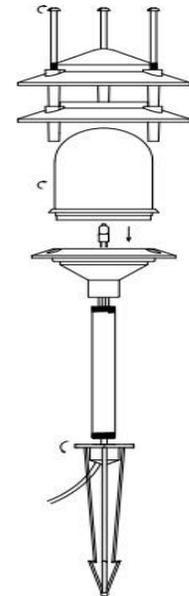

#### AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
LED3WG412V	3	360°	270	2700K	30000	20 Watt

#### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
JC10W	10	360°	75	2700K	2000
JC20W	20	360°	190	2700K	2000
JC35W	35	360°	265	2700K	2000
JC50W	50	360°	400	2700K	2000

For additional lamps and accessories, visit [bestprolighting.com](http://bestprolighting.com)

