




Ignis 24, brass, walnut, rigid stem

Ignis 17 / Ignis 24
pendant

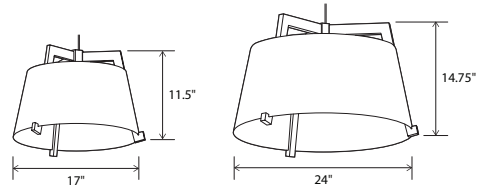

Ignis 17 dimensions: 17" Ø, 11.5"
 Ignis 24 dimensions: 24" Ø, 14.75"
 Materials: solid wood, metal
 Ignis 17 weight: 7 lb
 Ignis 24 weight: 11 lb
 Wood grain will vary
 Specifications subject to change



MATERIAL & FINISH OPTIONS

	Ignis part # 06-220-	
Fixture Size	17	24
17" Ø		
24" Ø		
<i>Standard Combinations</i> (Shade, Frame)		
distressed brass, walnut	DW	
distressed brass, dark stained walnut	DD	
brushed brass, walnut	RW	
brushed rose gold, dark stained walnut	GD	
matte black with matte white interior, dark stained walnut	BD	
matte black with matte white interior, white washed oak	BO	
matte black with matte white interior, walnut	BW	
gloss white, white washed oak	WO	
<i>Suspension Type</i>		
corded	C	
rigid	R	
<i>Lamping</i>		
integrated LED	L-27	
with diffuser - 2700K	P1	
integrated LED	L-35	
with diffuser - 3500K	P1	
medium base socket without diffuser	S	
medium base socket with diffuser	D	

Lamping
Integrated LED Specifications
 Light output: 1250 Lumens (source)
 Light color: 2700 K or 3500 K
 Additional color temperatures as well as sunset dimming are available upon request.
 Color accuracy: 90+ CRI
 Power usage: 13 W
 Input voltage: 120-277 V AC
 Dimmable: 0-10 V dimming at 120-277 V AC
 TRIAC and ELV dimming at 120 V AC only


Medium Base E26 Specifications
 Ignis 17 lamping:
 1x E26 base, type A lamp, 75 W max
 Ignis 24 lamping:
 3x E26 base, type A lamp, 75 W max each
 Bulbs not included
 Input voltage: 250 V AC max

Suspension Type
Corded
 8'-0" length of SVT wire is used. Wire is field adjustable and suitable for a sloped ceiling.
Rigid
 Stem comes 6' long and is field cuttable to length (.038" Ø)

Suspension and Hardware Finish
Standard Combinations
 Come with either black or satin nickel suspension, canopy, and sockets:
 Black: DW, DD, RW, GD, BD, BO, BW
 Satin Nickel: WO
Corded Versions
 White cord: satin nickel hardware
 Black cord: black hardware
 24" Ignis corded uses a 1/16" Ø steel cable for suspension

The Ignis and Imber were inspired by the same design principles that make Cerno and ICRAVE well suited to collaborate. Honesty, simplicity, elemental, timeless and quality are words that sit at the core of both companies' design ethos and we believe these light fixtures embrace these qualities well. Each fixture was reduced to its essential parts – frame and shade – highlighting the interplay of the components, and accentuating the clean lines of the form.

ICRAVE / Cerno

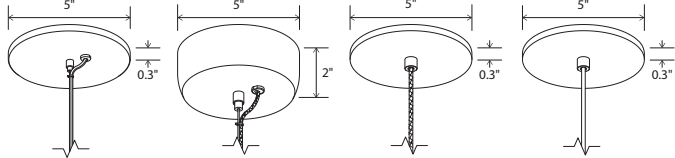

Ignis 24 with Medium base socket
 Low-profile round canopy, SPT with steel cable included, required to house the LED driver (3.25" x 2.25" x 1.25")
 Canopy dimensions: 5"Ø, 0.3" deep

Ignis 24 with LED lamping
 Extended-profile round canopy, braided cord with steel cable included, required to house the LED driver (3.25" x 2.25" x 1.25")
 Canopy dimensions: 5.5"Ø, 2" deep

Ignis 17 with LED lamping
 Low-profile round canopy, braided cord included
 Canopy dimensions: 5"Ø, 0.3" deep

Ignis 17 with Medium base socket
 Low-profile round canopy, SVT included
 Canopy dimensions: 5"Ø, 0.3" deep



Diffuser
 Frosted white diffuser (CM-024).
 Diffuser is recommended when fixture location may allow for direct glare. Integrated LED option always comes with a diffuser

