


INSTALLATION GUIDE: COMMERCIAL KITCHEN FAUCET

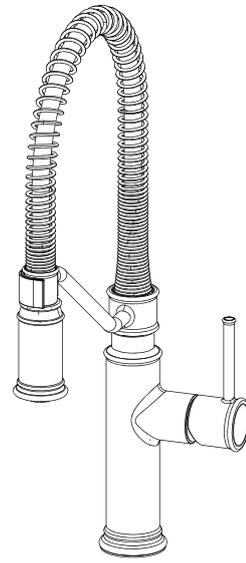

PRODUCT SPECS AND STANDARDS:

DESCRIPTION:

- Brass under body with flexible supplies.
- Flexible supply lines with 9/16-24 (3/8" Compression) ends.
- Single Hole Mounting: (Ø 1-1/4" Min to Ø 1-5/8" Max)

OPERATION:

- Requires less than 5LB force to operate valve
- Flow adjustment: 90° turn from full hot to full cold
- 1.8 GPM (6.8 L/min) Aerator

PRODUCT SPECS AND STANDARDS:

STANDARDS:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61
- NSF/ANSI 372
- CEC (CALIFORNIA ENERGY COMMISSION)

WARRANTY:

- 25 Year drip-free warranty
- Product to be free of defects in material or workmanship

NOTE:

While your faucet may differ in appearance to item shown, it will install with in the same manner.

CLEANING INSTRUCTIONS:

Use only a clean, soft cloth, water, and mild hand soap to clean unit.

WARNING: Do NOT use abrasive cleaners, chemicals, or abrasive cleaning pads to clean fixture. A very hard protective coating has been applied to this product to maintain it's appearance, but this product could be damaged with improper cleaning. Failure to follow cleaning instructions will void product warranty.

PRODUCT WARRANTY:

Windon Bay faucets have been manufactured to our high quality standards and workmanship. **The warranty covers defects in materials and/ or workmanship to the original purchaser/home owner (warranty is not transferable to another person).** The faucet is warranted to remain drip-free during normal use. All parts and finishes will be free from manufacturing defects. With the exception of items listed below, this product has a limited warranty against defects in materials or workmanship for a period of 1 year from the date of purchase. The warranty is voided if the product is found to be misused or the following cleaning instructions were not followed. Damage due to accidents or installation is not warranted.


1. Faucet valve cartridges have a limited warranty for a period of 25 years from the date of purchase. This date is stamped on the valve cartridge.
2. Product finish has a limited warranty for a period of 25 years from the date of purchase. Failure to follow the cleaning instructions listed below voids all finish warranty. Damage due to accidents or installation is not warranted.

This warranty covers replacement of cartridges, parts and finish only. It does not include labor charges and/or damage incurred during installation. Windon Bay will provide free of charge all parts and cartridges found to be covered under the warranty; any part that proves defective in material and/or workmanship under normal installation, use and service. Finish warranty is not covered if finish is exposed to extreme use of cleaners containing abrasives and alcohol, extreme cleaning, extreme chemical use, or any damage due to abuse or neglect (Oil Rubbed Bronze and Matte Black finish is warranted for 1 year).

**Please see cleaning instructions provided with each faucet. This warranty excludes all industrial, commercial, and business usage of faucets and only pertains to single dwelling residential use. Faucets used for other than single dwelling residential use are covered by a 1-year limited warranty from the date of purchase.

HELPFUL TOOLS

Phillips
Screwdriver




Adjustable
Wrench



Safety
Glasses



INSTALLATION GUIDE: COMMERCIAL KITCHEN FAUCET

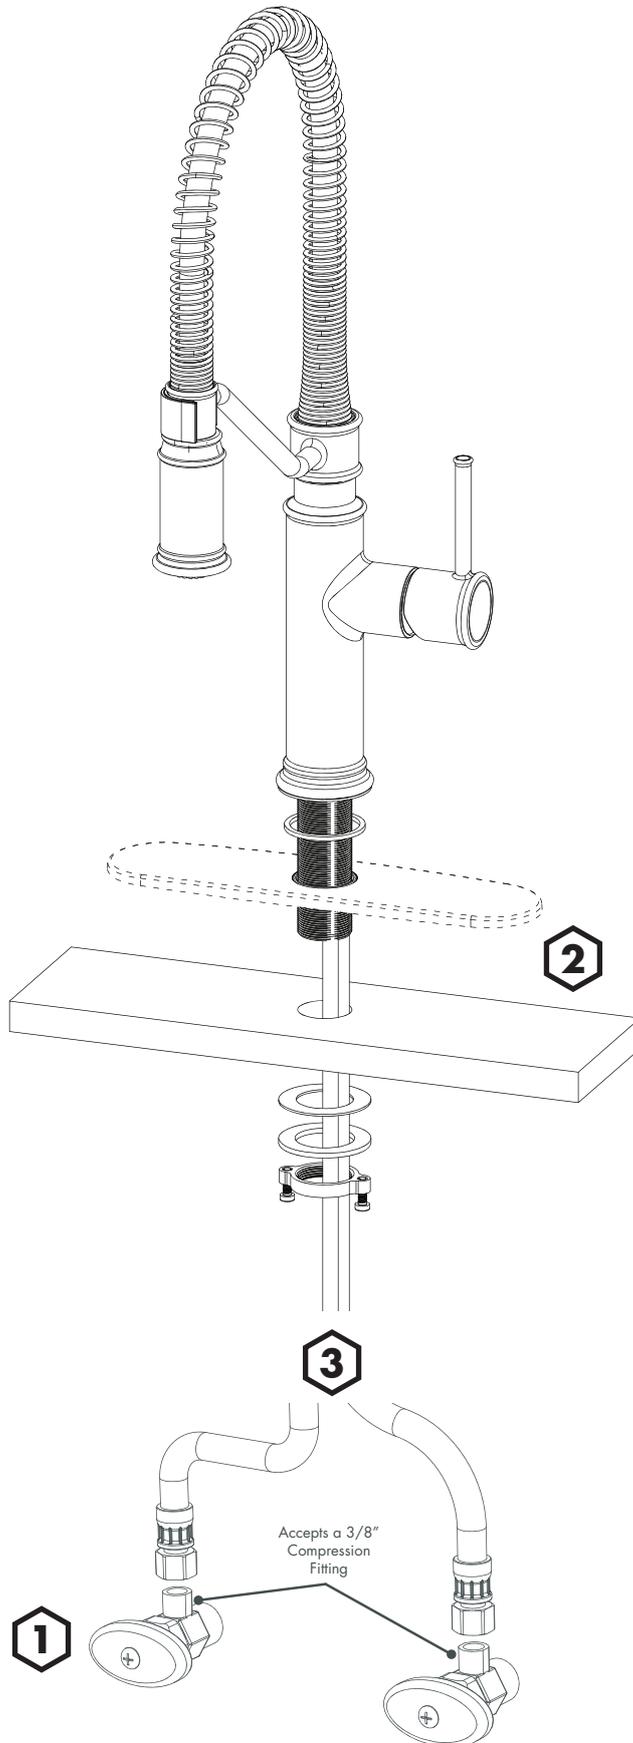

*SUPPLY STOPS NOT INCLUDED

1

TURN OFF WATER SUPPLIES.

Ensure mounting surface requirements are as follows:

- Single Hole Mounting: (\varnothing 1-1/4" Min to \varnothing 1-5/8" Max)

\varnothing 1 1/4" MIN

\varnothing 1 5/8" MAX



2

MOUNT UNIT ON KITCHEN SINK.


Place Hoses one at a time through mounting hole. Lower Faucet into position. If installing optional deckplate, place hoses through deckplate first. Secure with Rubber Washer, Metal Washer, and Mounting Nut. Final tighten screws of Mounting Nut with Phillips Screwdriver.

3

ASSEMBLE WATER SUPPLY LINES.

Inlet supplies are 3/8" Compression. Secure to water supply and wrench tighten.

INSTALLATION GUIDE: COMMERCIAL KITCHEN FAUCET

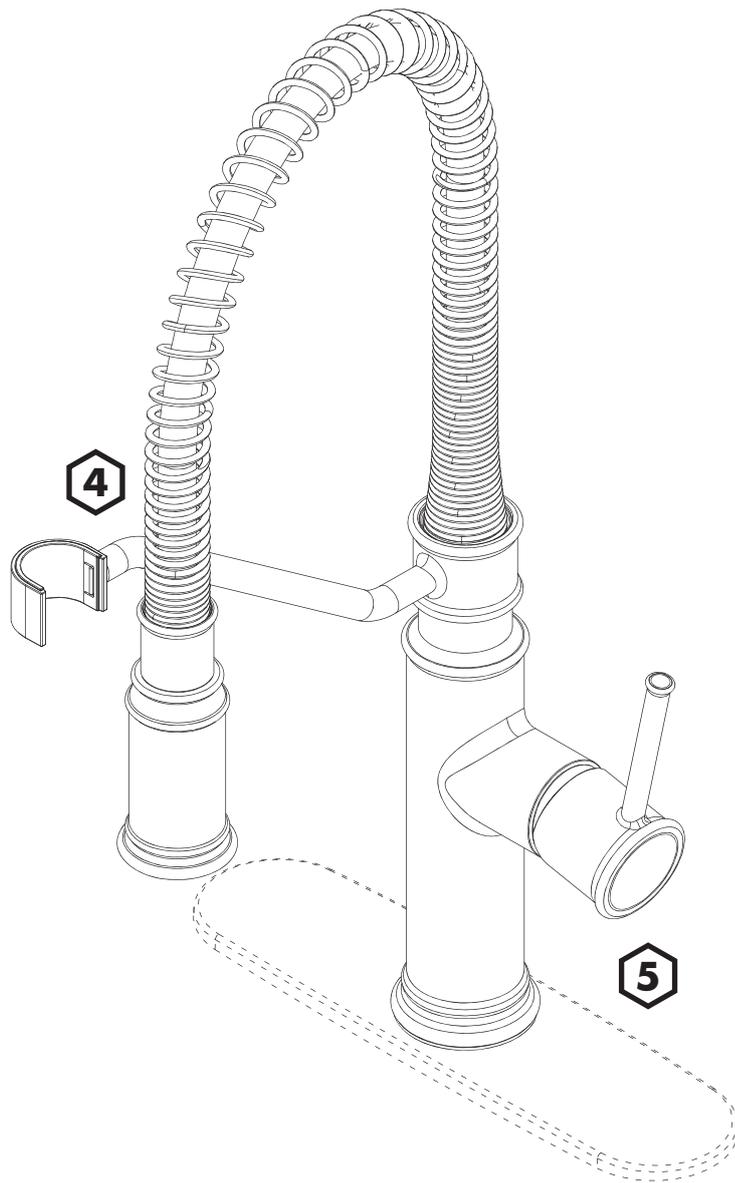

4 TURN ON WATER AND FLUSH THE SYSTEM.

Remove Spray Head from faucet. Turn on Water Supplies and flush system for 1 minute. Reassemble Spray Head to faucet. Activate faucet and inspect for leaks at all connections.

5 CONFIRM PROPER INSTALLATION


Check for leaks and proper operation of faucet.

6 CARTRIDGE VALVE REPLACEMENT: TURN OFF WATER SUPPLIES.

Should you need to replace the Valve Cartridge, please follow the steps below.

- Remove Handle by removing Set Screw using a Hex Wrench.
- Remove Valve Cartridge Cap Nut and Retaining Ring.
- Replace Cartridge.
- Reassemble in reverse order.

6 CARTRIDGE VALVE REPLACEMENT

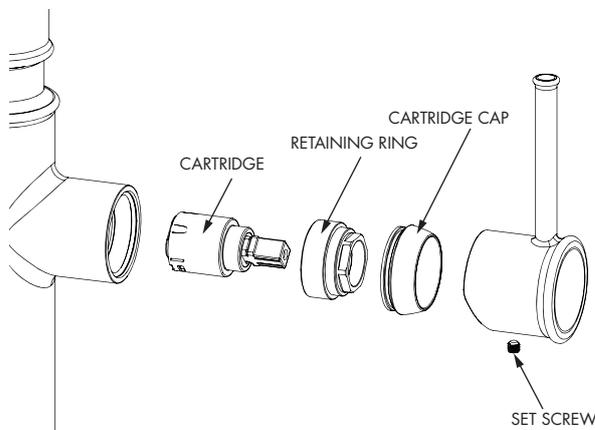


CALIFORNIA PROPOSITION 65:

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Wash hands after installation, repair, or removal of this product.

REPAIR PARTS: COMMERCIAL KITCHEN FAUCET

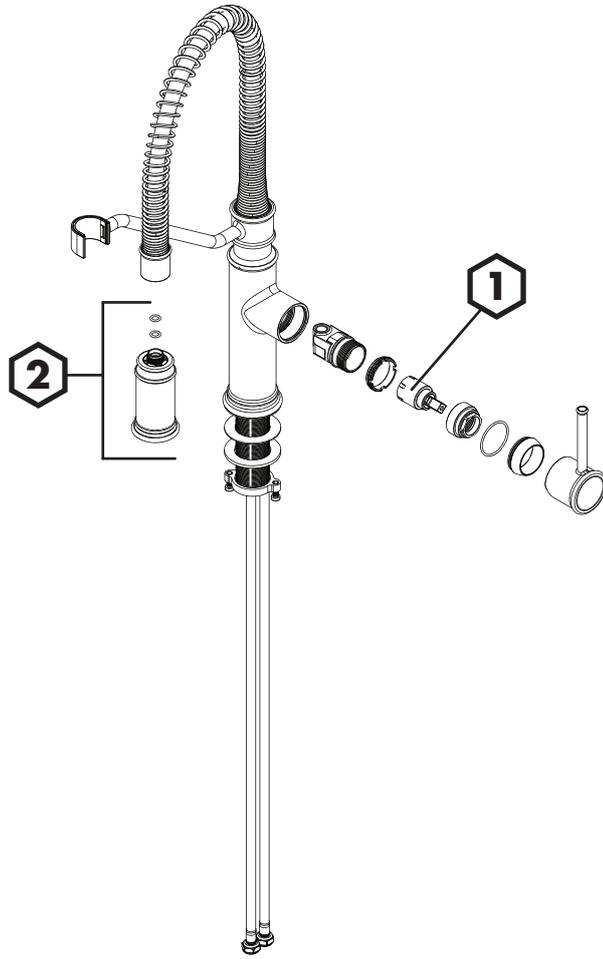


1

RPG05-112703
CARTRIDGE

2

RPG05-112894-XX (XX=FINISH)
SPRAYHEAD ASSEMBLY WITH SEALS

ROUGH-IN DIAGRAM: COMMERCIAL KITCHEN FAUCET

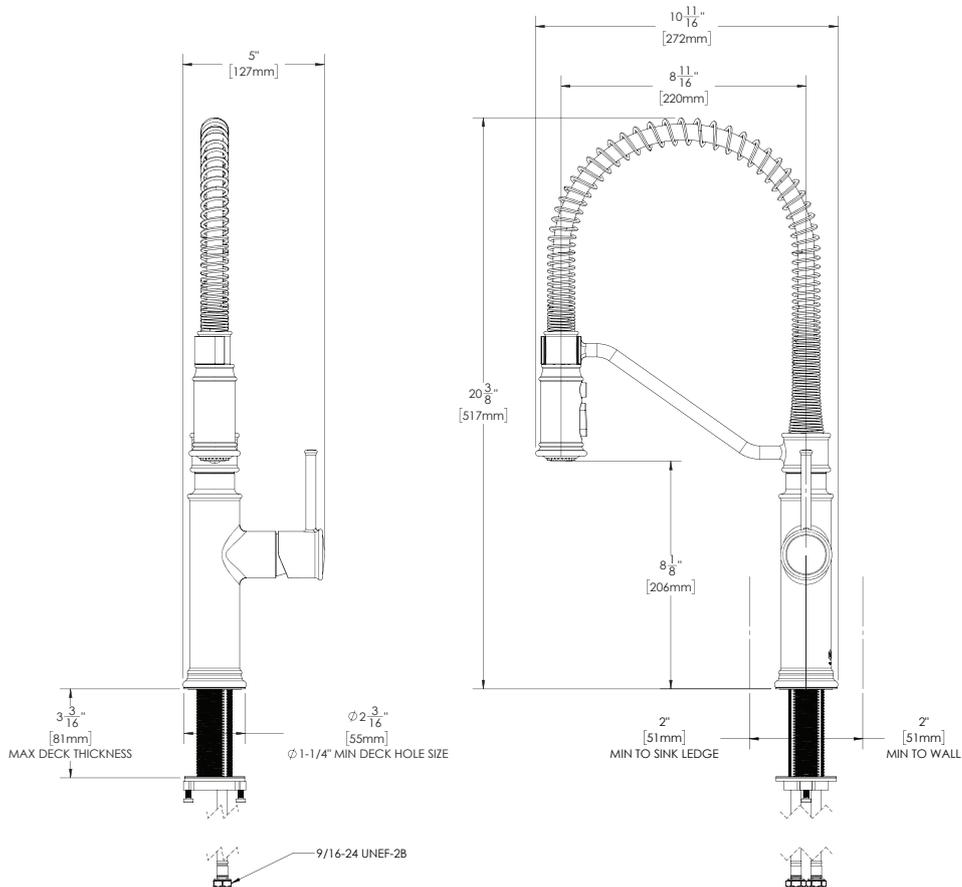

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED. DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.