





Sempria® LED Q Series

Linear LED fixture with **Flat** or **Angled** Housings and a slim profile for multiple applications

Flat Housing

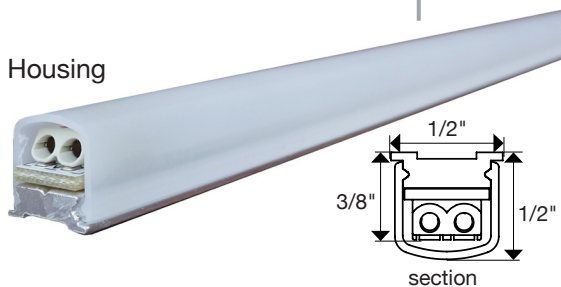

Angled Housing

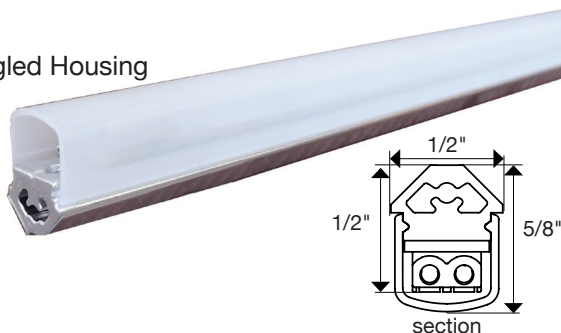

APPLICATIONS

- Toe/Soffit Lighting
- Cove Lighting
- Interior Cabinet Lighting
- Under Cabinet Lighting
- Display Case Lighting

FEATURES

- 50,000 hour LED life at 70% lumen maintenance
- Compact and versatile
- Frosted lens
- Poke-home connectors for easy installation
- 3 Year limited warranty
- No special gap-connectors needed
- No UV or IR
- Dimmable (with compatible dimmer)

SPECIFICATIONS

Construction Materials: Extruded aluminum (heatsink), IR Acrylic (lens)

Wattage: 1/4 Watt LEDs

Color Temp (Kelvin): 2700K (Warm White) or 3000K (Neutral White)

CRI: 90+

LED Beam Angle: 120°

Input Voltage: 15 Volt DC

LED Spacing: 1 1/2"

Mounting: Double Stick Tape / Screws included

Max Run: Refer to driver specs

Wiring: 18/2 solid (recommended)

Environment: Dry and damp locations

1/4
watt

SEMPRIA® Q SERIES

PART NUMBER	DIMENSIONS	TOTAL WATTS	LUMENS Based on 3000K (approx. per fixture)*	KELVIN TEMP
FLAT HOUSING 1/4 WATT				
SF9Q-6UN2-Temp	6 1/2" x 1/2" x 1/2"	2W	207	2700K, 3000K
SF9Q-12UN4-Temp	12 1/2" x 1/2" x 1/2"	4W	414	2700K, 3000K
SF9Q-18UN6-Temp	18 1/2" x 1/2" x 1/2"	6W	621	2700K, 3000K
SF9Q-24UN8-Temp	24 1/2" x 1/2" x 1/2"	8W	828	2700K, 3000K
SF9Q-30UN10-Temp	30 1/2" x 1/2" x 1/2"	10W	1035	2700K, 3000K
SF9Q-36UN12-Temp	36 1/2" x 1/2" x 1/2"	12W	1242	2700K, 3000K
SF9Q-42UN14-Temp	42 1/2" x 1/2" x 1/2"	14W	1449	2700K, 3000K
SF9Q-48UN16-Temp	48 1/2" x 1/2" x 1/2"	16W	1656	2700K, 3000K
ANGLED HOUSING 1/4 WATT				
SA9Q-6UN2-Temp	6 1/2" x 1/2" x 5/8"	2W	207	2700K, 3000K
SA9Q-12UN4-Temp	12 1/2" x 1/2" x 5/8"	4W	414	2700K, 3000K
SA9Q-18UN6-Temp	18 1/2" x 1/2" x 5/8"	6W	621	2700K, 3000K
SA9Q-24UN8-Temp	24 1/2" x 1/2" x 5/8"	8W	828	2700K, 3000K
SA9Q-30UN10-Temp	30 1/2" x 1/2" x 5/8"	10W	1035	2700K, 3000K
SA9Q-36UN12-Temp	36 1/2" x 1/2" x 5/8"	12W	1242	2700K, 3000K
SA9Q-42UN14-Temp	42 1/2" x 1/2" x 5/8"	14W	1449	2700K, 3000K
SA9Q-48UN16-Temp	48 1/2" x 1/2" x 5/8"	16W	1656	2700K, 3000K

POWER SUPPLIES

PART NUMBER	DESCRIPTION
TLD-24WSI	24W plug-in 15VDC call for dimming options
TLD-D30WSO	30W hardwire 15VDC
TLD-D45WSO	45W hardwire 15VDC
TLD-D60WSO	60W hardwire 15VDC
TLD-D75WSO	75W hardwire 15VDC

INSTALLATION COMPONENTS

PART NUMBER	DESCRIPTION
SP-20FT-18/2	20 foot spool of 18/2 awg solid wire
SP-50FT-18/2	50 foot spool of 18/2 awg solid wire
SF9-WW-48	48" Sempria® LED Universal WireWay for FLAT HOUSING
SG9-IL-CONN	In-line Connector

DIMMING OPTIONS

PART NUMBER	DESCRIPTION
DVELV-300P	300W Diva slide dimmer
DVELV-303P	300W Diva slide dimmer 3-way
MAELV-600-Color	Maestro electronic smart dimmer
MA-R-Color	Preset smart remote (for multiple switching)

Task Lighting retains the right to modify the design of our products without prior notice

