



BELLVER

TWO HANDLE WIDESPREAD BATHROOM FAUCET

Model

MFF-BVRW8

Available Finishes

Brushed Nickel (BN)
Chrome (CP)
Oil Rubbed Bronze (ORB)

Standards



- IAPMO UPC/cUPC
- NSF 61-9

MEETS ASME
A112.18.1

- ASME A112.18.1

MEETS
CA AB-1953


- CA AB-1953 (less than 0.25% lead content)



- ADA Accessibility Guidelines for Buildings and Facilities 4.27.4 Controls and Mechanisms



- EPA WaterSense low-flow water efficiency

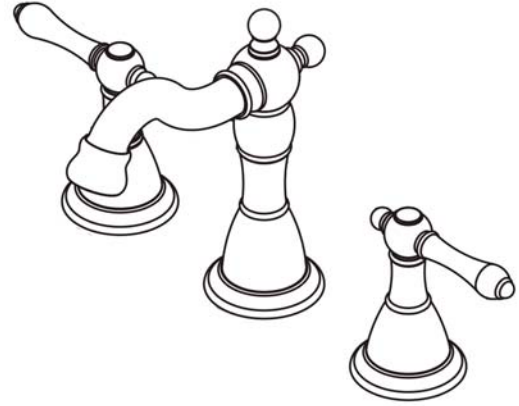

Product Features

- Washerless Valve Cartridges
- Cast Brass Valve Bodies
- Zinc Lever Handles
- Brass Pop-Up Drain Assembly
- 100% Factory Pressure Tested

General Description

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless valve cartridges. Zinc handles. One-half inch male inlet shanks with brass coupling nuts and shank nuts. Brass drain body with 1-1/4" (32mm) diameter tailpiece. 1.5 gpm/(5.7 Lpm) maximum flow rate.

Suggested Specification

Two handle widespread lavatory faucet shall feature cast brass valve bodies and zinc handles with reinforced flexible hose connections for 6" to 10" installations. Shall also feature 1/4 turn washerless valve cartridges. Fitting shall be Fontaine Model #MFF-BVRW8-____.

Flow Rate

1.5 gallons per minute (5.7 liters per minute)
maximum flow rate at 60 psi.

