
Model: H/L/J-LED207

AC LED Track Luminaire

WAC LIGHTING

Responsible Lighting®

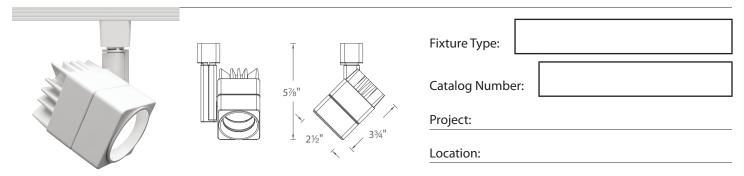

PRODUCT DESCRIPTION

LED207 track luminaire offers driverless AC LED technology and easy change of beam angles in field. Superior light output in a small, unobtrusive design. The high output LEDs outperform halogen 50W MR16. Developed for upscale residential and commercial environments.

FEATURES

- · Driverless AC LED technology
- · Compact integrated design
- · Easy change of beam angles in field
- · Outperforms halogen 50W MR16
- · Consistent high quality beam pattern
- · Accommodates 1 lens accessory
- · 360° horizontal and 90° vertical aiming
- 50,000 hour rated life
- · 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum with removable PC lens cap

for easy change of lenses or accessories

Finish: Black (BK) and White (WT) powder coat paint.

Driver: Input voltage: 120VAC 50/60Hz. **Light Source:** High Voltage AC LED module.

Dimming: Dims to 10%-100% with electronic low voltage (ELV)


dimmer. Compatible with LUTRON SELV-300P,


DVELV-300P

Standards: ETL & cETL Listed. Energy Star Rated.

BEAMSHIFT™TECHNOLOGY

LED207 track luminaires come with BeamShiftTM, allowing in-field change of beam angle simply by changing the location of the lens with a simple flat-head screwdriver.






Flood 40° Configuration Convex Lens located behind the spacer

Spot 25° Configuration
Convex Lens located in front of the spacer.

ORDER NUMBER Voltage Color Temp Power CRI Track System Model Finish Lumens Efficacy Beam 25° 540 35.3 Lm/W H Track BK Black L Track LED207-30 120V 3000K 85 15W WT White J/J2 Track 1271m/M



Example: H-LED207-30-WT

LENSES &	ACCESSORI	ES	
Model		Color	
		AMB	Amber
		BLU	Blue
LENS-16	Color Lens	GRN	Green

RED

YEL

Red

Yellow

ВК	WT

FINISHES

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

Model: H/L/J-LED207

AC LED Track Luminaire



Responsible Lighting®

APPLICATION PERFORMANCE - 3000K

FC

79

35

20

13



4 ft

6 ft

8 ft

10 ft

Distance

0° Aiming Angle (ceiling to floor)

LED207-30
25° beam

1.8

2.7

3.5

4.4

W

1.8

2.7

3.5

4.4

40° beam		
FC	L	W
64	2.9	2.9
28	4.4	4.4
16	5.8	5.8
10	7.3	7.3

LED207-30

/
^

45° Aiming Angle (ceiling to wall)

LED207-30)
25° beam	

Distance	FC	L	w
4 ft	28	3.7	2.5
6 ft	12	5.6	3.8
8 ft	7	7.5	5.0
10 ft	4	9.3	6.3

LED207-30 40° beam

10 0001111			
FC	L	W	
23	6.7	4.1	
10	10.1	6.2	
6	13.4	8.2	
4	16.8	10.3	

PHOTOMETRY

