





#### Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.






#### Pre-assembly:


- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

#### Parts List

Item	Description		QTY
P1	Table Top		1
P2	Post		1
P3	Mounting Plate		1
P4	Base		1

#### Hardware List

Item	Description		QTY
H1	Long Bolt Ø5/16"*2-1/4"L		4
H2	Short Bolt Ø5/16"*1-1/4"L		8
H3	Lock Washer 5/16"		12
H4	Flat washer 5/16"		12
H5	Allen Wrench 5/16"		1

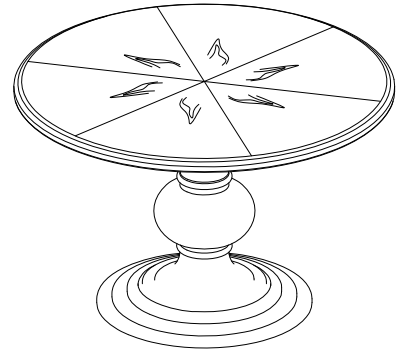

#### DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE.  
SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING  
IMPROPERLY ASSEMBLED AFTER PURCHASE.

#### Assembly Procedures:

Step 1. Attach the mounting plate (P3) to the post (P2) as shown below image 1. Securely tighten the bolts.

- (H2)x4 Short Bolt Ø5/16"\*1-1/4"L 
- (H3)x4 Lock Washers 5/16" 
- (H4)x4 Flat washers 5/16" 
- (H5)x1 Allen Wrench 5/16" 

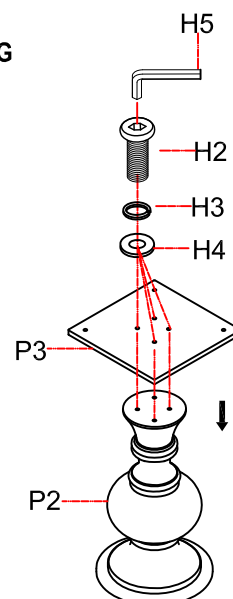






Image 1

### Assembly Procedures:

Step 2. Attach the base (P4) to the assembled post (P2) as shown below image 2. Securely tighten the bolts.

- (H1)x4 Long Bolt Ø5/16"\*2-1/4"L 
- (H3)x4 Lock Washers 5/16" 
- (H4)x4 Flat washers 5/16" 
- (H5)x1 Allen Wrench 5/16" 

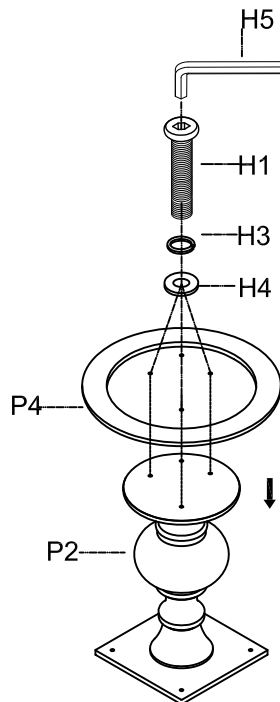


Image 2

Step 3.

1) Turn over the table top (P1) on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the assembled mounting plate (P3) to the bottom of table top (P1) as shown below image3.

2) Securely tighten all bolts, then turn the assembled table to an upright position. Assembly is complete.

**Failure to follow these instructions may cause the bolts to misalign during assembly.**

- (H2)x4 Short Bolt Ø5/16"\*1-1/4"L 
- (H3)x4 Lock Washers 5/16" 
- (H4)x4 Flat washers 5/16" 
- (H5)x1 Allen Wrench 5/16" 

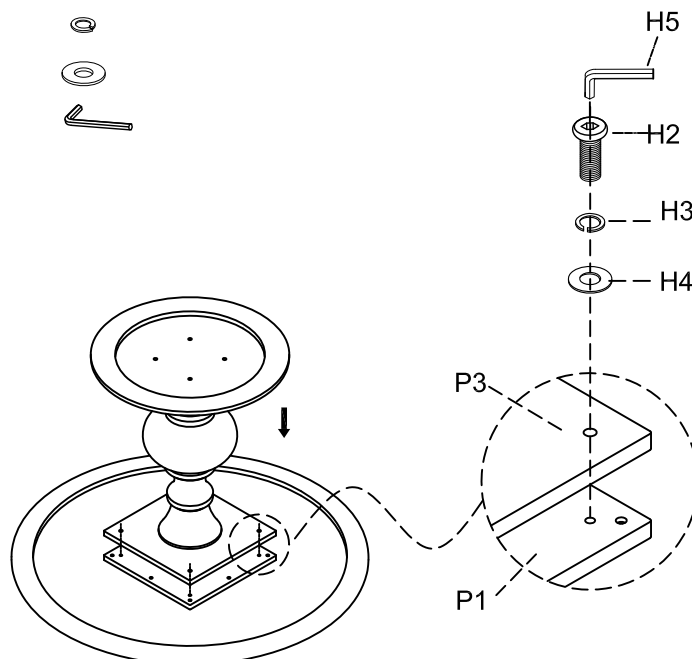


Image 3

### ADDITIONAL NOTE ABOUT SAFETY:

**BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.**

**THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.**

Thank you for your purchase