


FIN - model: WP-LED1

Endurance Wallpack

WAC LIGHTING

Responsible Lighting®

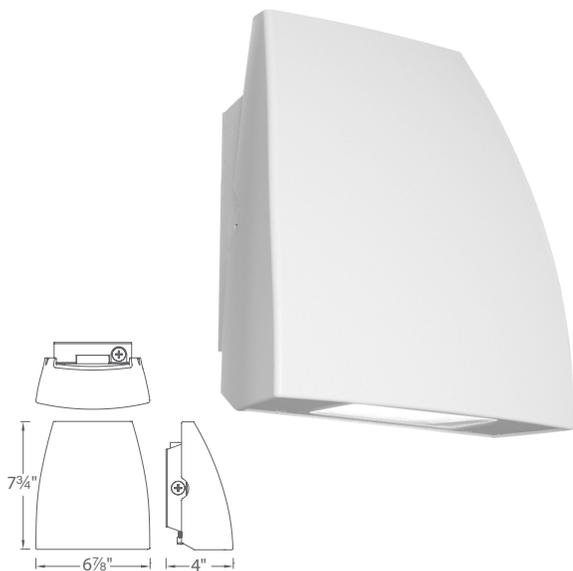

Fixture Type:

Catalog Number:

Project: _____

Location: _____

SPECIFICATIONS

Construction: Die-cast aluminum

Power: Integral driver in luminaire. Universal voltage input (120V-277V)

Dimming: 100% - 30% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

Finish: Architectural Bronze, Graphite, and White

Standards: IP66, Wet Location, ETL & cETL Listed

Total Harmonic Distortion: 35%

Operating Temperature: -40°C (-40°F) to 40°C (104°F)


PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

PHOTOMETRY

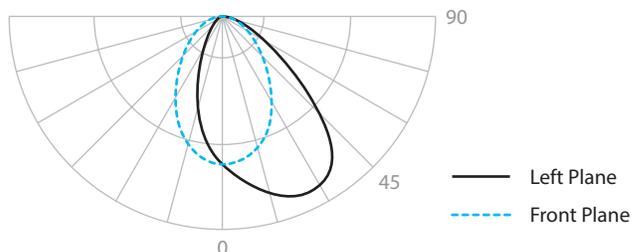

ORDER NUMBER

		Power	Comparable	Color Temp	Delivered Lumens	CBCP	Finish
	WP-LED119	19W	39W HID	30 3000K	1390	1030	aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White
				50 5000K	1460	1048	
	WP-LED127	27W	70W HID	30 3000K	2075	1461	
				50 5000K	2135	1467	
	WP-LED135	35W	100W HID	30 3000K	2750	1930	
				50 5000K	2825	1921	

- -

Example: **WP-LED119-50-BZ**

ACCESSORIES

	Motion Sensor (120V)	MS-120-BZ Bronze MS-120-GY Gray MS-120-WT White
--	----------------------	--

	Photo Sensor (120V)	PC-120-BZ Bronze PC-120-GY Gray PC-120-WT White
--	---------------------	--

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585