



1(877)795-5684
THE TUB CONNECTION
500 WEST BREWINGTON AVE
KIRKSVILLE, MO 63501

CLAWFOOT TUB
DECK MOUNT
SUPPLY LINES

THETUBCONNECTION.COM

INSTRUCTIONS

Before beginning, read the instructions below and follow all local plumbing and building codes.


Unpack and inspect your new faucet for any shipping damages and ensure no pieces are missing. If any damages are discovered, DO NOT INSTALL.

Please Contact Customer Service at 1(866)448-TUBS.

You may also call our Customer Service for any other assistance with our products.

SHUT OFF ALL WATER SUPPLY LINES AT THE TUB WHEN INSTALLING NEW FAUCET

TOOLS AND MATERIALS : Adjustable Wrench Plumber's Tape
Thread Sealant Damp Cloth

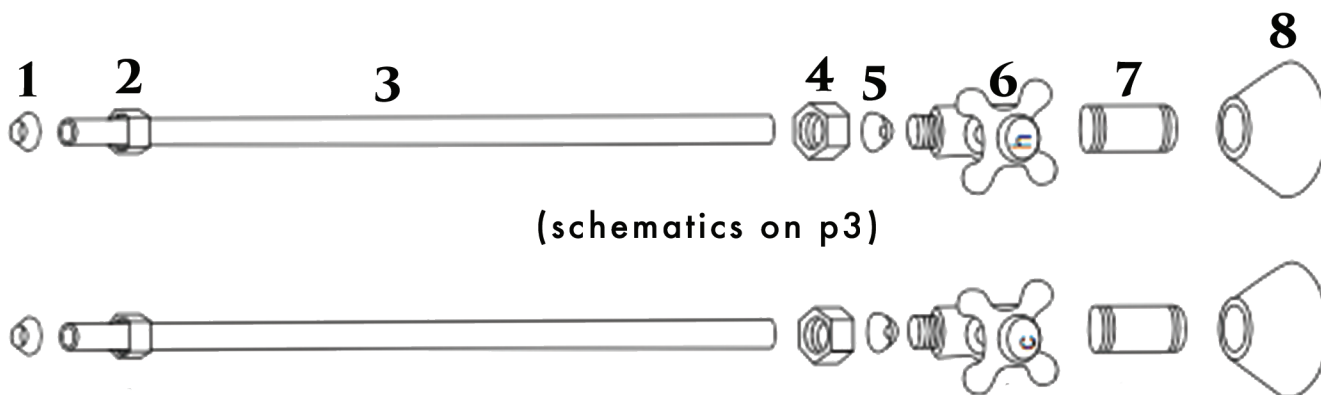



INSTALLATION

1. Place your thread sealant or plumber's tape on the copper or threaded pipes at the finished floor. Thread the pipe nipples (7) onto the copper or threaded pipes. Slide the bell flanges (8) over the pipe nipples and press them into place.
2. Apply thread sealant to the pipe nipples and attach the straight stop valves (6). Use a damp cloth to wipe away any excess sealant. Allow the sealant to cure for 24 hours before use.
3. Slide the compression nuts (4) onto the supply tubes (3).
4. Place the ferrules (5) onto the supply tubes (3)
5. Close the straight stop valves and test for leaks by briefly turning on the main water supply. If any leakage does occur, tighten the connections with an adjustable wrench as necessary. If problems persist, contact our customer service.
6. Now that the supply lines are installed, continue installing the tub faucet according to the faucet instructions.

1 (2) Rubber Cone Washer —

2 (2) Slip Nut —

3 (2) Supply Tube —

4 (2) Compression Nut —

5 (2) Ferrule —

6 (2) Straight Stop Valve —
1/2" IPS x 1/2" OD compression

7 (2) 1/2" NPT Nipple —

8 (2) Bell Flange —

