
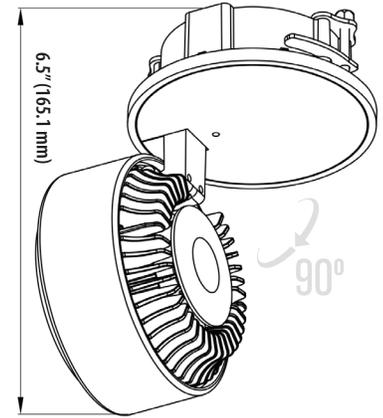


# ORBIT SERIES

## VMDL000701A020BL

# VONN

PROJECT:	TYPE:	CATALOG #:	DATE:
----------	-------	------------	-------

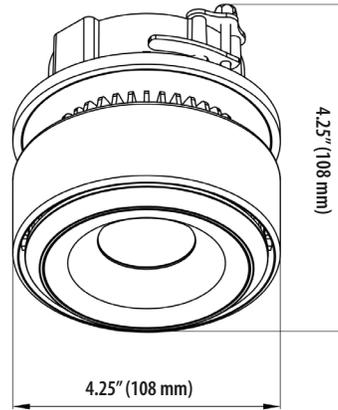

### NOMINAL STANDARD SPECIFICATIONS

SKU:	VMDL000701A020BL
FINISH:	BLACK
LUMEN OUTPUT:	1852.05
INPUT VOLTAGE:	100 - 277V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	0-10V
POSITIONING:	ADJUSTABLE 350° LEFT - RIGHT, 90° UP - DOWN
BEAM ANGLE:	38.9°
WATTAGE:	20 W
CUT OUT:	4" (101.6mm) Dia.
ENVIRONMENT:	DRY / IP20
MOUNTING:	RECESSED

### FEATURES

- LED Flush mounted adjustable downlight, ORBIT Series
- Aluminum body structure available in 2 finishes Black and White
- Integrated LED fixture, recessed installation
- IC Rated
- OVERALL DIMENSIONS: 4.25" Diameter x 4.25"H
- BACKPLATE DIMENSIONS: 4.25" Diameter x 2"H
- LIGHT HEAD DIMENSIONS: 4.25" Diameter x 2.25"H
- HOLE SIZE: 4" Diameter
- ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
- 3 Year Limited Warranty

\*\*\*THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"\*\*\*

### SAMPLE ORDERING SKU

1	2	3	4	5	6
VMDL000701A020BL	020	BL	30K	B36	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMDL000701A	020 - 20 W	BL - Black WH - White*	27K - 2700* 30K - 3000 35K - 3500* 40K - 4000*	B12 -12°* B24 -24°* B38 -38.9°	EMD - EMERGENCY DRIVER EMC - EMERGENCY CIRCUIT

### NOTES

### RELATED PRODUCTS AVAILABLE:


- VMDL003001B012WH
- VMDL000701A020WH
- VMDL000701A020WH
- VMCL004101A008BL



PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ CATALOG #: \_\_\_\_\_ DATE: \_\_\_\_\_

### PHOTOMETRICS


30K - 3000 - STANDARD

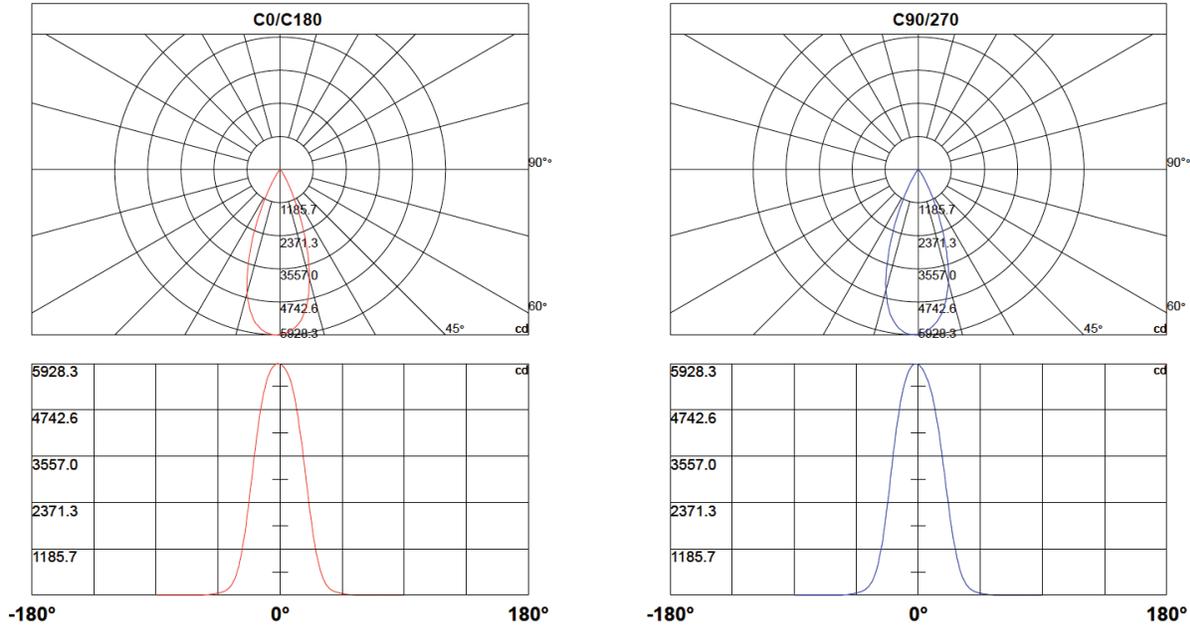

### BEAM ANGLE

30K - 3000 - STANDARD

Lux-Distance Curve

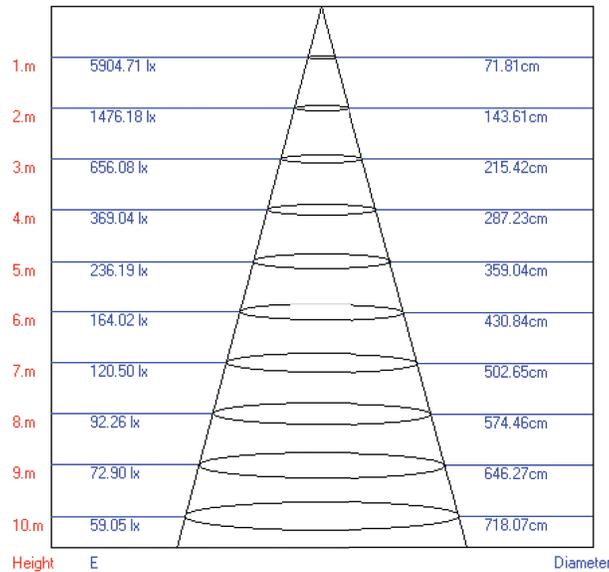

Beam Angle: 39.50°