


Submitted Model No.: _____

Specific Features: _____

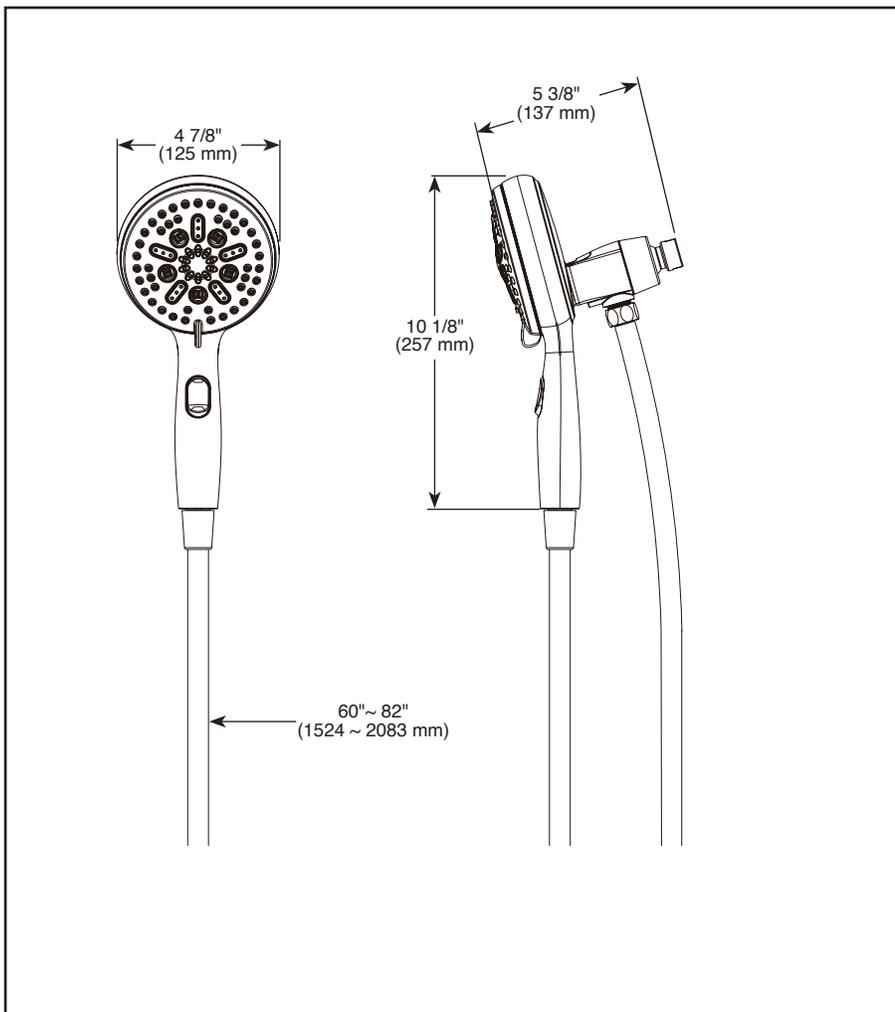

▲ Designate proper finish suffix

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



see what Delta can do™

SUREDOCK™ MAGNETIC HAND SHOWER

■ Magnetic hand held shower with 7 spray settings

FEATURES:

- H₂Okinetic® Technology
- Touch-Clean® Nozzles
- MagnaTite® Docking

STANDARD SPECIFICATIONS:

- Maximum flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Multiple hand shower spray settings - pause is a non-positive shut-off
- Push-button activates pause mode
- Easy-turn dial to change hand shower sprays
- SureDock™ Magnetic allows for easy and secure docking for hands-free showering
- 60" - 82" (1524mm-2083mm) stretchable metal hose

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) – 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3 ◆
- EPA WaterSense®

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2021 Delta Faucet Company