


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

**ITEM#:LIT4212A**

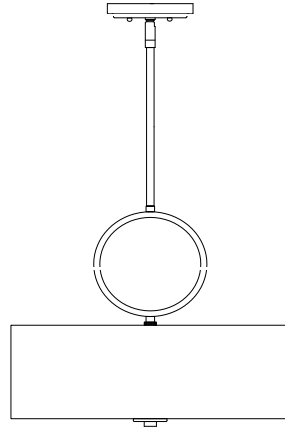

## Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

## Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	J	Bulb		3X
B	Wire Nut		3X	K	Bottom Tube		1X
C	Mounting Screw		2X	L	Diffuser		1X
D	Canopy		1X	M	Cover		1X
E	Canopy Nut		2X	N	Finial		1X
F	Ground Screw		1X	O	Short Tube w/ teeth		1X
G	Long Tube		2X	P	Short Tube w/t teeth		1X
H	Lamp Body		1X	Q	Flat Washer		1X
I	Shade		1X				

# Installation

## Step 1


Unpack all parts from cartons carefully.

Insert the power cords of the Lamp Body (H) through Short Tube w/t teeth (P), Short Tube w/ teeth (O), Long Tube (G), rotate each tube clockwise till tight.

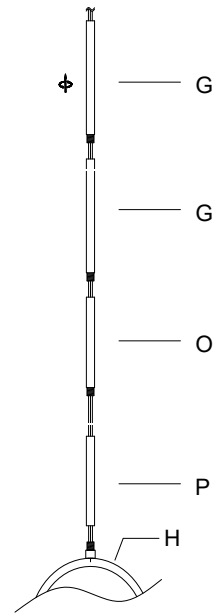


## Step 2

Insert the cords of Long tube(G) into the Canopy(D), then cut off the extra cord so that 6" wires at least long within the outlet junction box.




## Step 3

Separate the Mounting Plate(A) from the Canopy(D) by removing 2 Canopy Nuts(E) anti-clockwise.

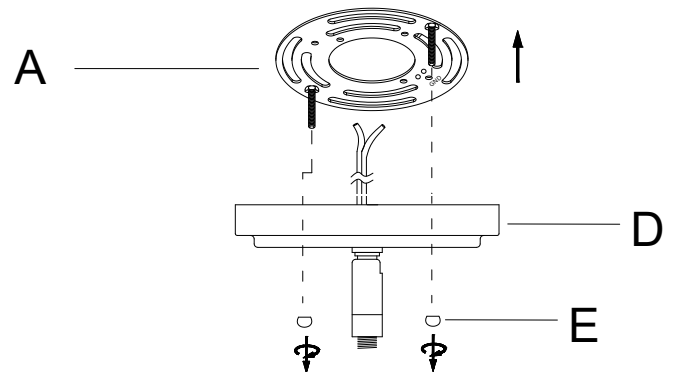


## Step 4

Attach the Mounting Plate (A) to the ceiling junction box and secure it by tightening 2 Mounting Screws (C) with a screwdriver until secure.

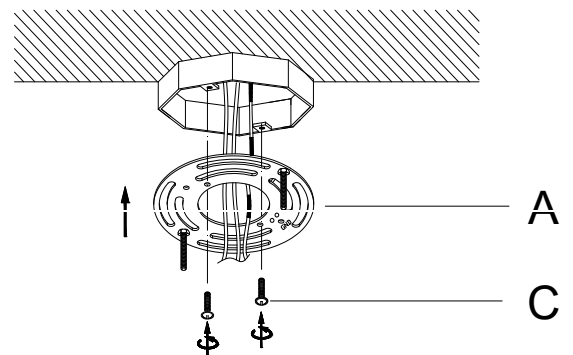

# Step 5 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




## Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


# Step 6

Raise the Canopy (D) over the Mounting Plate (A), making sure 2 Threaded Rods extend downwards through 2 holes on the Canopy (D). Secure the Canopy (D) by turning the Canopy Nuts (E) clockwise until tight.

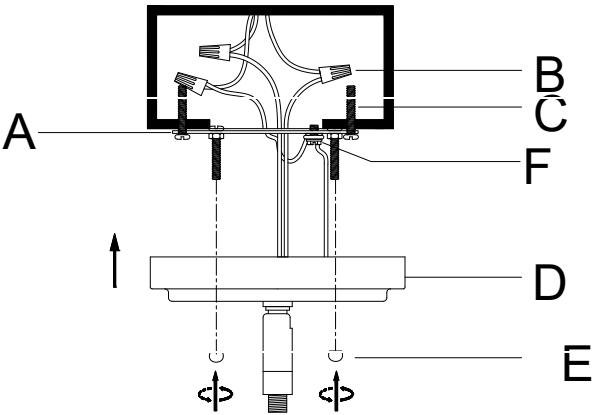

# Step 7

Position the Shade (I) onto the Lamp Body (H) as diagram, firstly unscrewing the threaded tube, lifting the Flat Washer (Q) upward, insert the spider of the Shade(I), then rotate the threaded tube clockwise till tight.

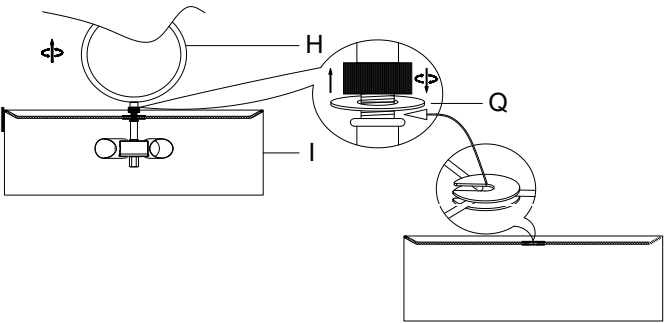


## Step 8

Insert the bulbs(J) into the sockets until secure.

**DO NOT EXCEED THE SPECIFIED  
WATTAGE.**


**PLEASE USE TYPE "A" BULB MAX 60-WATT  
OR CFL MAX 13-WATT OR LED MAX 9W  
THERE ARE 3\*9W LED BULBS IN THE BOX.**

Insert the Bottom Tube (K) into the bottom nipple of the Lamp Body (H). Position the Diffuser (L) onto the Bottom Tube (K), secure it in place by inserting the Cover (M) onto the exposed threaded portion and turn the Finial (N) clockwise until tight.

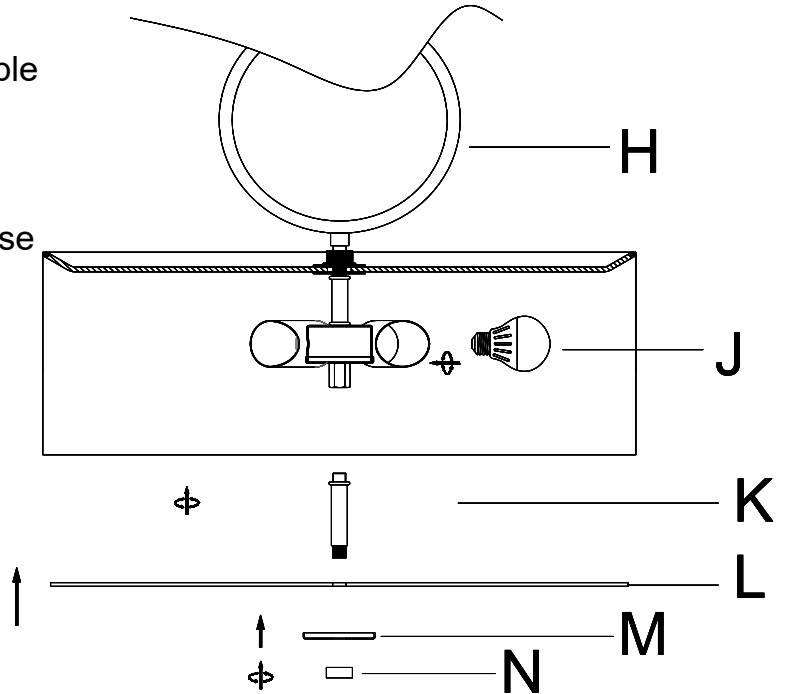

## Step 9

Consult a qualified electrician to ensure correct branch circuit conductor

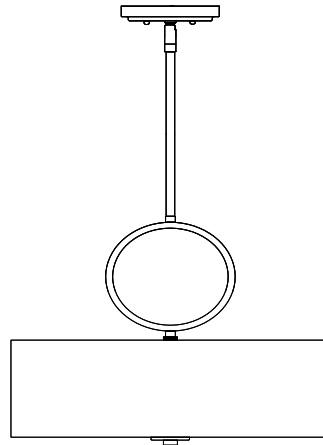

ENJOY YOUR LAMP